

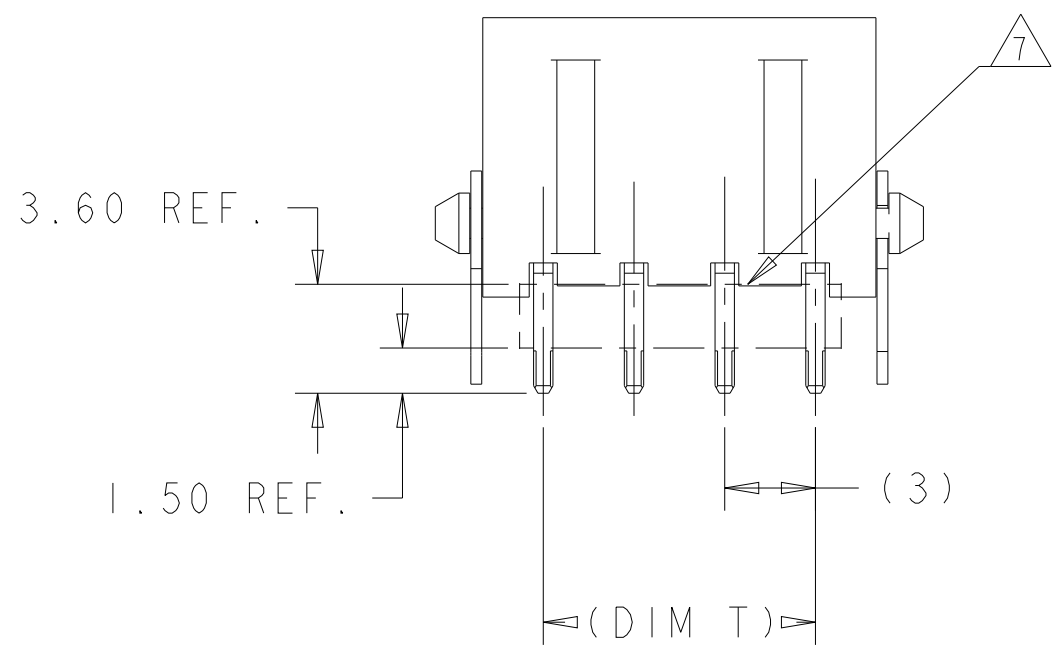
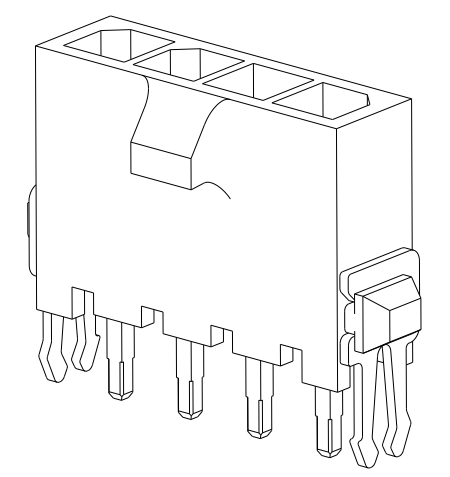
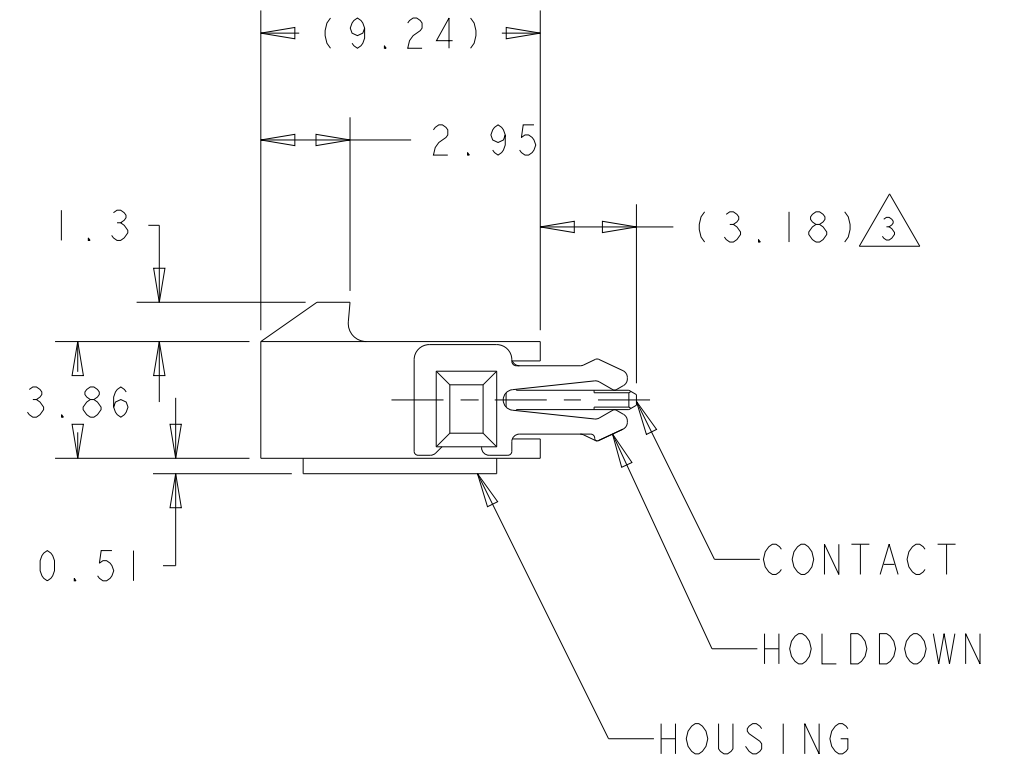
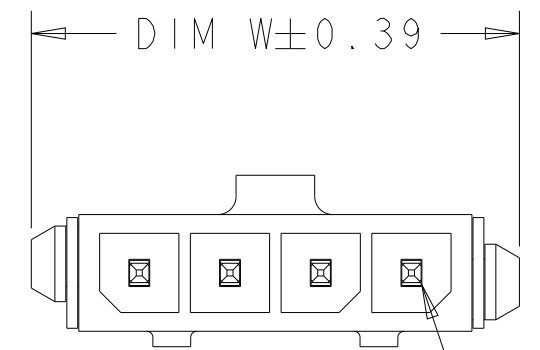


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECR-12-007353	18MAY2012	KH	TM
		A2		REVISED PER ECO-20-009442	13JUL2020	WLS	DZ
		A3		REVISED PER ECN-22-139652	17FEB2022	WLS	VS
		A4		REVISED PER ECN-22-162091	06JUL2022	WLS	VS

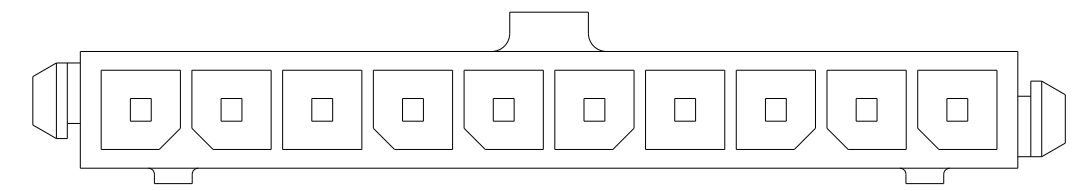

- 1 MATERIAL: HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.  
CONTACTS - BRASS  
HOLDDOWNS- PHOSPHOR BRONZE.
- 2 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING AREA.  
2.54µm MINIMUM MATTE TIN ON SOLDER TAILS.  
ALL OVER 1.27µm MINIMUM NICKEL.  
HOLDDOWNS- 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
- 3 NO BARE EDGES ALLOWED ON SOLDER TAILS.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 COUNTERPART RECOMMENDED IS PN 1445022 OR 2008571 (DASH ACC. TO NUMBER OF POSITION).
- 6 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.
- 7 CUTTING EDGE, NO PLATING PRESENT IN THE REGION SHOWN.

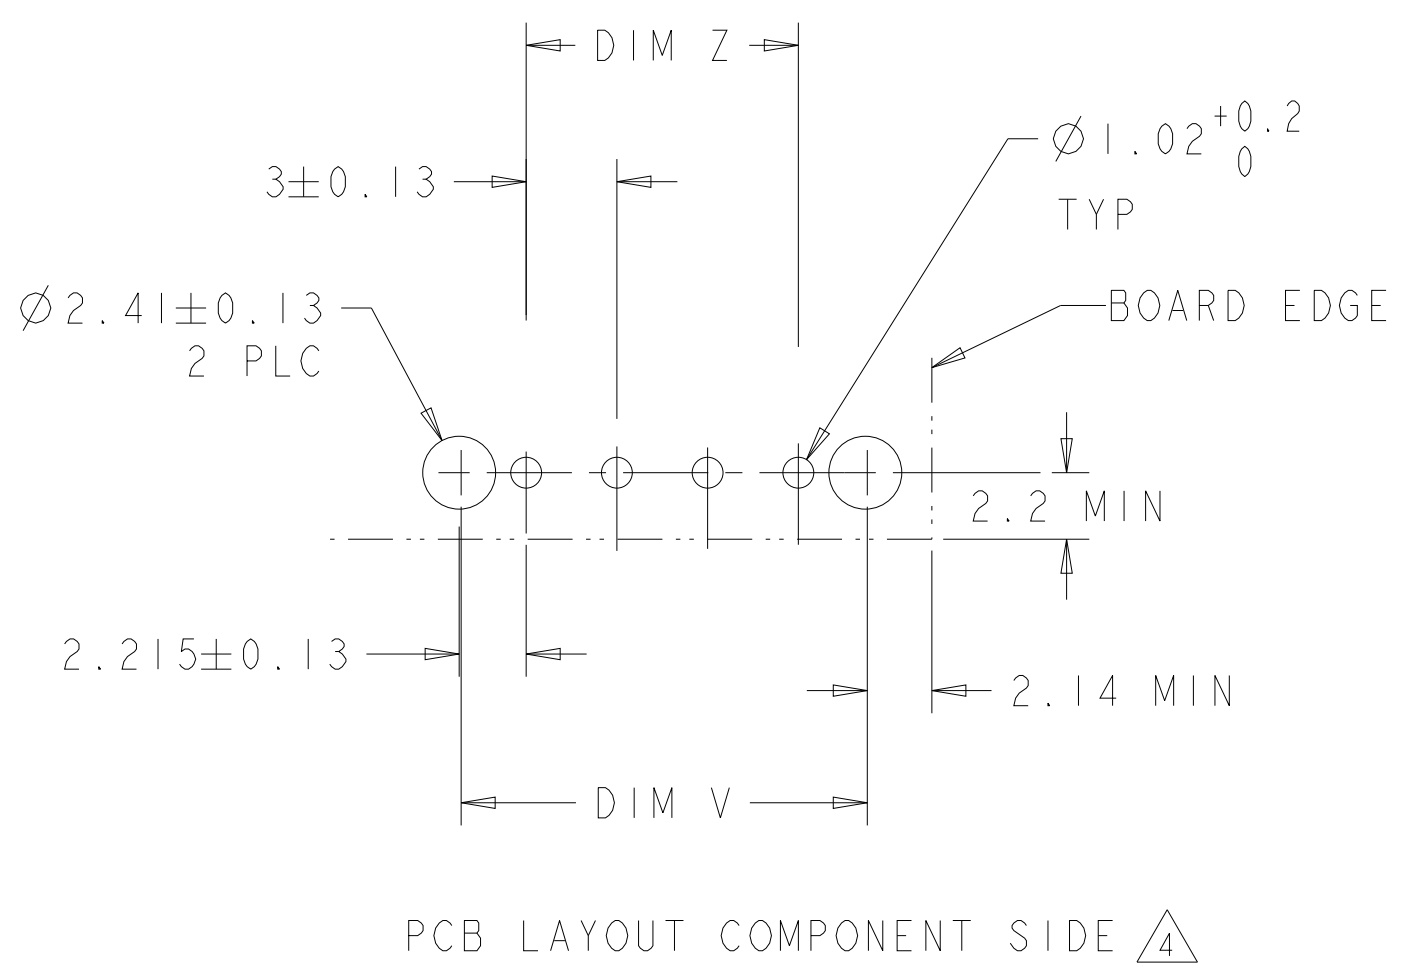

10 POS.

KEYING BY POSITION SIZE

27.00	31.43	27.00	34.14	10	1-2029037-0
9.00	13.43	9.00	16.14	4	2029037-4
DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN K. WHITAKER 17 JAN 2008	TE Connectivity
	0 PLC ±	CHK C. JONES 17 JAN 2008	
	1 PLC ±	APVD C. JONES 17 JAN 2008	
	2 PLC ±0.20	NAME	
	3 PLC ±	PRODUCT SPEC	VERT THRU HOLE HEADER ASSY, 0.76 MIC
	4 PLC ±	APPLICATION SPEC	GOLD CONTS, W/THRU HOLE HOLDDOWNS,
MATERIAL	ANGLES ±°	114-13000	SINGLE ROW, MICRO MATE-N-LOK(TM)
	FINISH	WEIGHT	RESTRICTED TO
		CUSTOMER DRAWING	SIZE A2
		SCALE 4:1	CAGE CODE 00779
		SHEET 1 OF 1	DRAWING NO. C-2029037
		REV A4	