



ASSEMBLY MATERIAL NUMBER	DESCRIPTION	MOUNTING OPTION (SEE NOTE 11)
172201-0001	POWER RECEPTACLE ASSEMBLY - PRESS-FIT	SCREW MOUNT
172201-0002	POWER RECEPTACLE ASSEMBLY - SOLDER TAIL	SCREW MOUNT




DATE CODE TO BE LOCATED IN THIS AREA SEE NOTE 7

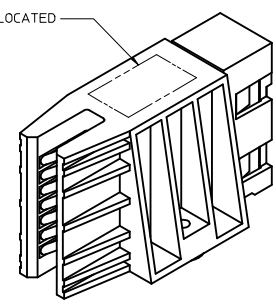


- NOTES:
- MATERIALS:
-HOUSING: GLASS FILLED, LCP 94V-0, COLOR: BLACK
-TERMINALS: COPPER ALLOY
 - FINISH:
-125 μ INCH MIN. SILVER PLATE IN CONTACT AREA ONLY,
-100 μ INCH MIN. SELECT TIN IN TAIL AREA OVER
-50 μ INCH MIN. NICKEL OVERALL
 - LUBRICATION: EB4 IN CONTACT AREA
 - REFERENCE DOCUMENT: PS-172201-001, AS-172201-001
 - MODULE ASSEMBLY IS RoHS COMPLIANT
 - GATHERABILITY: ±1.80 X-DIRECTION
 - RECOMMENDED PCB THICKNESS 3.18/125 MIN
 - FINAL ASSEMBLY TO BE PACKAGED AND LABELED PER PACKAGING KIT DRAWING NUMBER PK-172201-001
 - BUSS BAR REQUIRES SILVER OVER NICKEL PLATING WITH AN ENVIRONMENTAL BARRIER APPLIED IN THE CONTACT AREA
 - BUSS BAR MUST HAVE A RADIUS ON THE MATING EDGE WITH NO SHARP EDGES/CORNERS
 - CONNECTOR IS SUPPLIED WITH (2) #2-32 TYPE AB SELF TAPPING SCREWS, RECOMMENDED TORQUE: 0.29 N·M (2.5 IN·LB)
 - MOLEX RECOMMENDS THE USE OF MOUNTING SCREWS FOR ADDITIONAL MECHANICAL SUPPORT WITH PRESS-FIT CONTACTS. REFER TO DRAWING SD-172202-0002 FOR ASSEMBLIES WITHOUT SCREW MOUNT.
 - DATE CODE FORMAT IS DDDMMYY

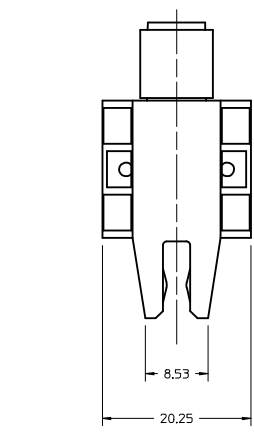

X - GATHERABILITY SEE NOTE 5

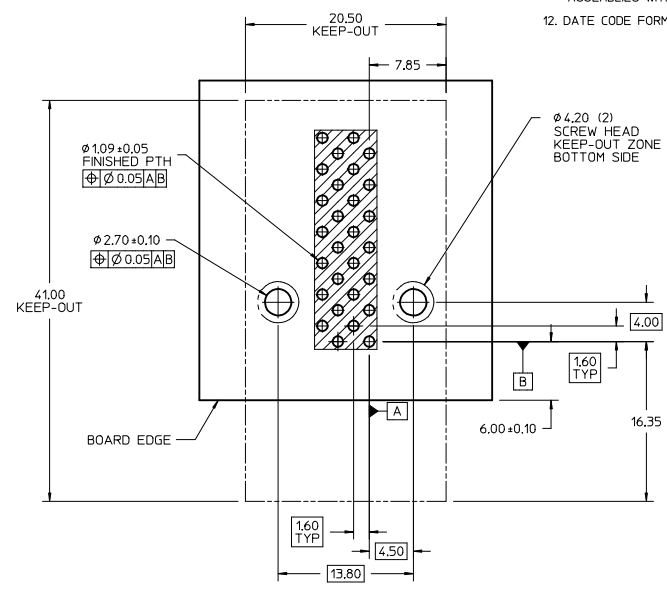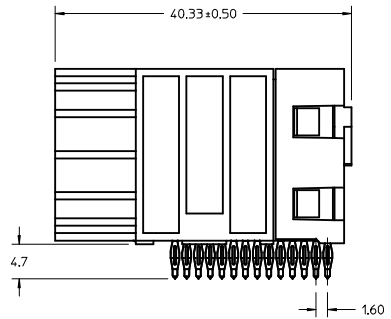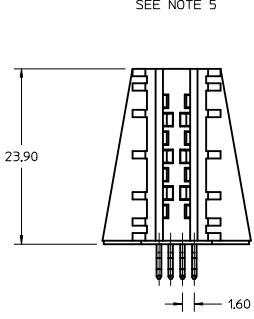




RECOMMENDED PCB LAYOUT
COMPONENT SIDE
3.18 MIN PCB THICKNESS

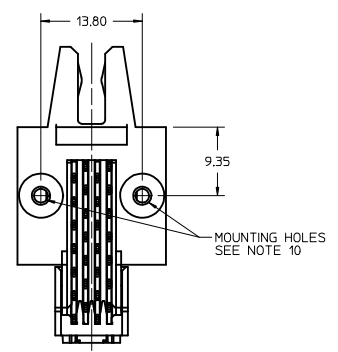


MOUNTING HOLES SEE NOTE 10

REVISED NOTE IEC NO. UCP2015-5116 DRAWN BY: CHYKMBANDURA CHECKED BY: APATEL APPR: APATEL DATE: 2015/06/09 DATE: 2015/06/11 DESCRIPTION:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	∇=0 ∇=0 ∇=0	4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±0.25 1 PLACE ±0.38 0 PLACE ±---	mm INCH ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MM ONLY DRAWN BY: MBANDURA CHECKED BY: PATEL APPROVED BY: APATEL DATE: 2013/09/11 DATE: 2013/12/20 DATE: 2014/01/29	3:1	METRIC
MATERIAL NO. SEE CHART DOCUMENT NO. SD-172201-0001 SHEET NO. 1 OF 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

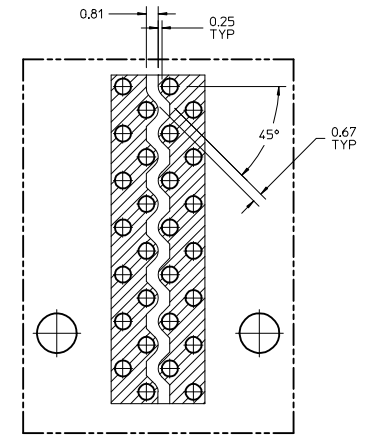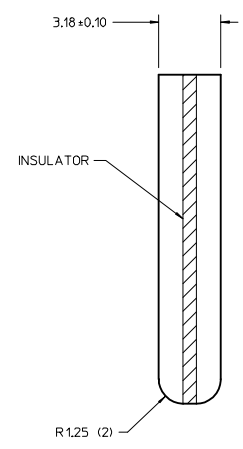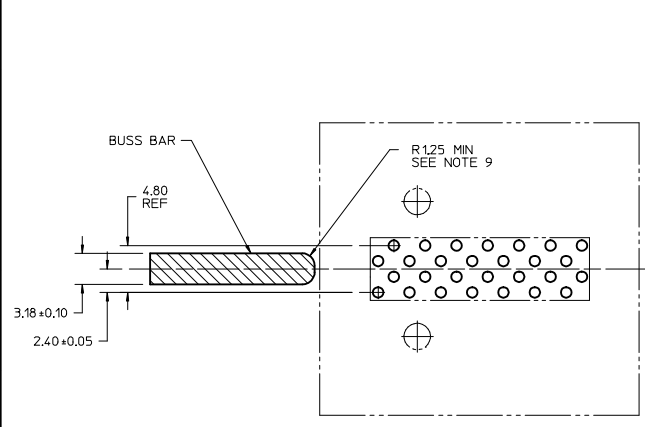

BUSS BAR & PAD LAYOUT FOR 2 CIRCUIT APPLICATION

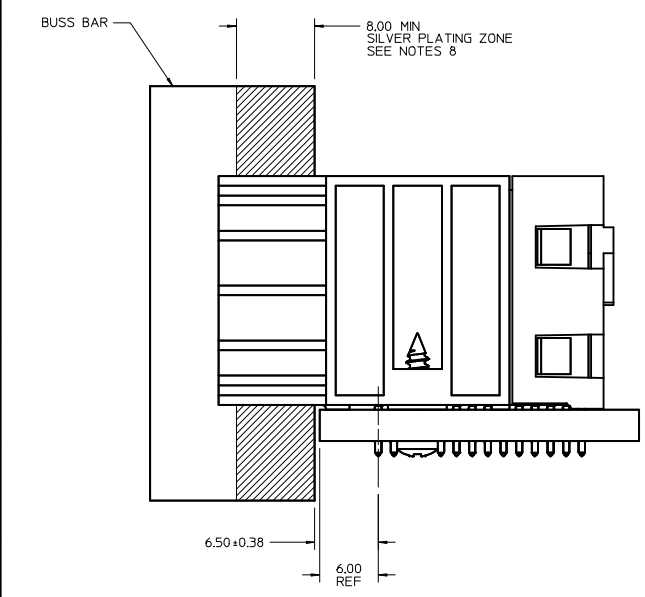


SEE SHEET 1 IEC NO: UCP2015-5116 DRAWN: JUILLES 2015/06/09 CHKD: MBANDURA 2015/06/09 APPR: APATEL 2015/06/11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	4:1	METRIC	☉
	▽=0	4 PLACES ± --- ± ---	DRAWN BY	DATE	TITLE	
	▽=0	3 PLACES ± --- ± ---	MBANDURA	2013/09/11	ASSEMBLY, RECEPTACLE BUSS BAR CONNECTOR EXTREME POWERMASS	
	2 PLACES ± 0.25 ± ---	CHECKED BY	DATE			
	1 PLACE ± 0.38 ± ---	PATEL	2013/12/20			
	0 PLACE ± --- ± ---	APPROVED BY	DATE			
	ANGULAR ±1/2°	APATEL	2014/01/29			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.	SEE CHART	DOCUMENT NO.	SD-172201-0001	SHEET NO. 2 OF 2
		SIZE	D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		


19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

ASSEMBLY MATERIAL NUMBER	DESCRIPTION	MOUNTING OPTION (SEE NOTE 11)
172201-0001	POWER RECEPTACLE ASSEMBLY - PRESS-FIT	SCREW MOUNT
172201-0002	POWER RECEPTACLE ASSEMBLY - SOLDER TAIL	SCREW MOUNT




DATE CODE TO BE LOCATED IN THIS AREA SEE NOTE 7

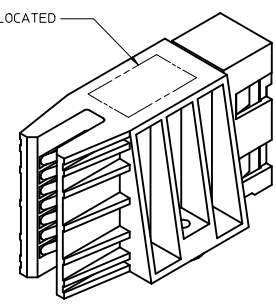


- NOTES:
- MATERIALS:
-HOUSING: GLASS FILLED, LCP 94V-0, COLOR: BLACK
-TERMINALS: COPPER ALLOY
 - FINISH:
-125 μ INCH MIN. SILVER PLATE IN CONTACT AREA ONLY,
-100 μ INCH MIN. SELECT TIN IN TAIL AREA OVER
-50 μ INCH MIN. NICKEL OVERALL
 - LUBRICATION: EB4 IN CONTACT AREA
 - REFERENCE DOCUMENT: PS-172201-001, AS-172201-001
 - MODULE ASSEMBLY IS RoHS COMPLIANT
 - GATHERABILITY: ±1.80 X-DIRECTION
 - RECOMMENDED PCB THICKNESS 3.18/125 MIN
 - FINAL ASSEMBLY TO BE PACKAGED AND LABELED PER PACKAGING KIT DRAWING NUMBER PK-172201-001
 - BUSS BAR REQUIRES SILVER OVER NICKEL PLATING WITH AN ENVIRONMENTAL BARRIER APPLIED IN THE CONTACT AREA
 - BUSS BAR MUST HAVE A RADIUS ON THE MATING EDGE WITH NO SHARP EDGES/CORNERS
 - CONNECTOR IS SUPPLIED WITH (2) #2-32 TYPE AB SELF TAPPING SCREWS, RECOMMENDED TORQUE: 0.29 N·M (2.5 IN·LB)
 - MOLEX RECOMMENDS THE USE OF MOUNTING SCREWS FOR ADDITIONAL MECHANICAL SUPPORT WITH PRESS-FIT CONTACTS. REFER TO DRAWING SD-172202-0002 FOR ASSEMBLIES WITHOUT SCREW MOUNT.
 - DATE CODE FORMAT IS DDDMMYY

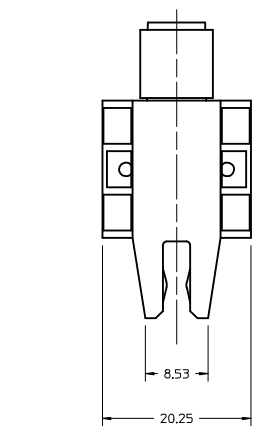

X - GATHERABILITY SEE NOTE 5

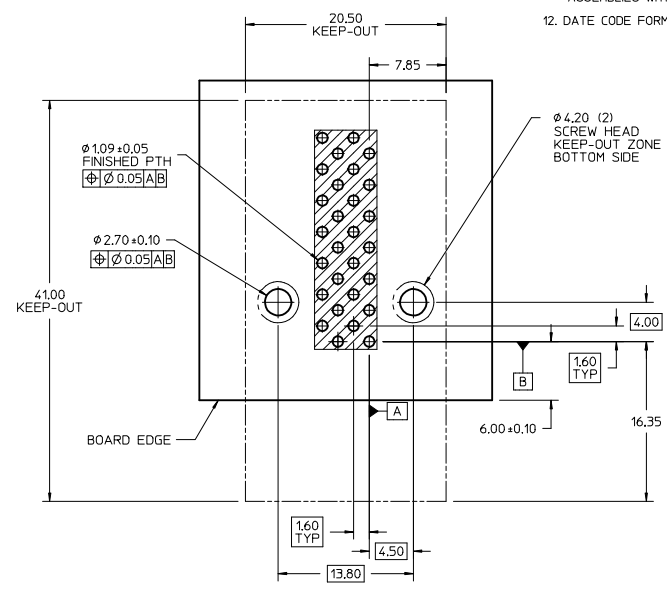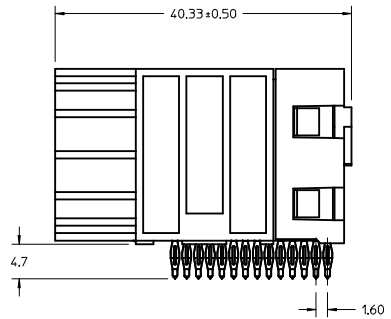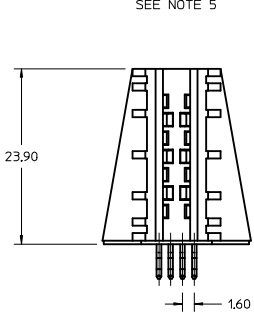




RECOMMENDED PCB LAYOUT COMPONENT SIDE 3.18 MIN PCB THICKNESS

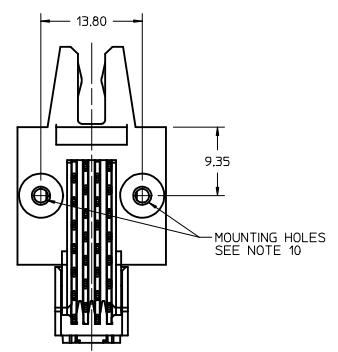


MOUNTING HOLES SEE NOTE 10

REVISED NOTE IEC NO. UCP2015-5116 DRAWN BY: CHYKMBANDURA CHECKED BY: APATEL APPR: APATEL DATE: 2015/06/09 DATE: 2015/06/11 DESCRIPTION:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	∇=0 ∇=0 ∇=0	4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±0.25 1 PLACE ±0.38 0 PLACE ±---	mm INCH ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MM ONLY DRAWN BY: MBANDURA CHECKED BY: PATEL APPROVED BY: APATEL DATE: 2013/09/11 DATE: 2013/12/20 DATE: 2014/01/29	3:1	METRIC
MATERIAL NO. SEE CHART DOCUMENT NO. SD-172201-0001 SHEET NO. 1 OF 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

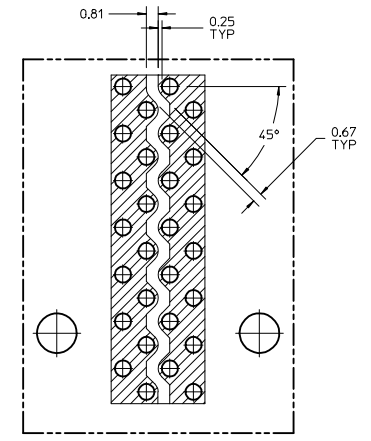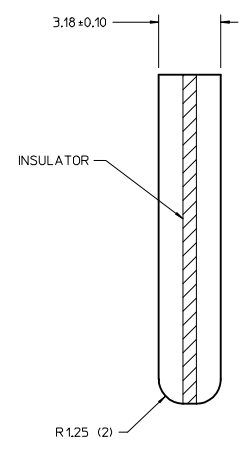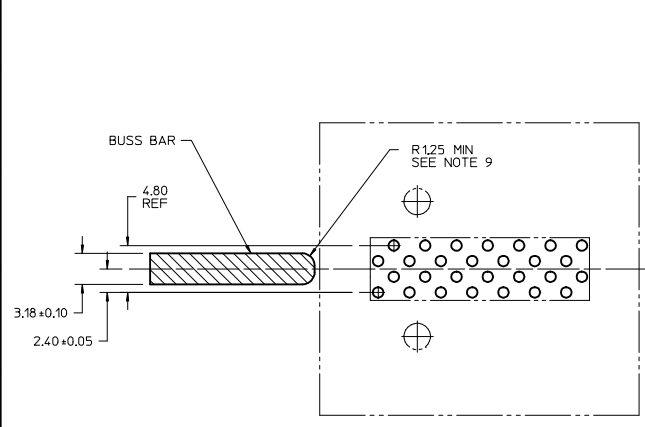

BUSS BAR & PAD LAYOUT FOR 2 CIRCUIT APPLICATION

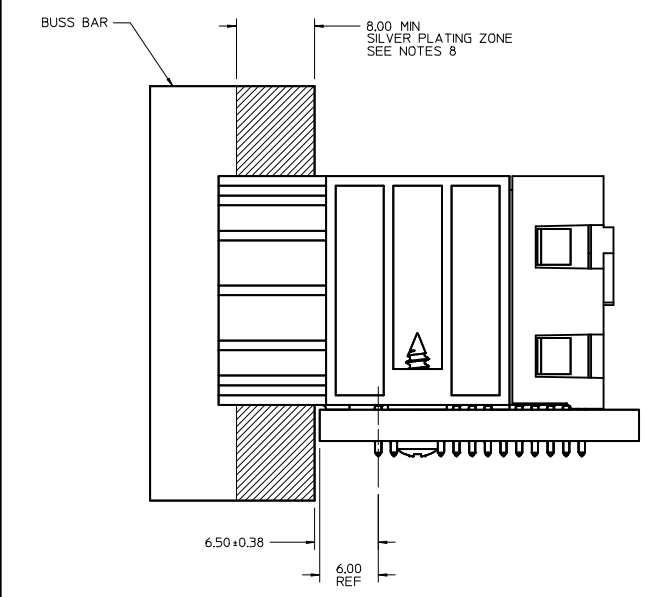


SEE SHEET 1 IEC NO: UCP2015-5116 DRAWN: JUILLES 2015/06/09 CHKD: MBANDURA 2015/06/09 APPR: APATEL 2015/06/11	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm INCH	DRAWN BY MBANDURA	DATE 2013/09/11	TITLE ASSEMBLY, RECEPTACLE BUSS BAR CONNECTOR EXTREME POWERMASS		
A2	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART	DOCUMENT NO. SD-172201-0001	SHEET NO. 2 OF 2	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

ASSEMBLY MATERIAL NUMBER	DESCRIPTION	MOUNTING OPTION (SEE NOTE 10)
172201-0003	POWER RECEPTACLE ASSEMBLY - SOLDER TAIL	NONE





- NOTES:
- MATERIALS:
-HOUSING: GLASS FILLED, LCP 94V-0, COLOR: BLACK.
-TERMINALS: COPPER ALLOY.
 - FINISH:
-125 μ INCH MIN. SILVR PLATE IN CONTACT AREA ONLY.
-100 μ INCH MIN. SELECT TIN IN TAIL AREA OVER
-50 μ INCH MIN. NICKEL OVERALL.
 - LUBRICATION: EB4 IN CONTACT AREA.
 - REFERENCE DOCUMENT: PS-172201-001, AS-172201-001
 - MODULE ASSEMBLY IS RoHS COMPLIANT.
 - GATHERABILITY: ±1.80 FROM CENTER IN X-DIRECTION
 - RECOMMENDED PCB THICKNESS 3.18/125 MIN.
 - FINAL ASSEMBLY TO BE PACKAGED AND LABELED PER PACKAGING KIT DRAWING NUMBER PK-172201-001
 - BUSS BAR REQUIRES SILVER OVER NICKEL PLATING WITH AN ENVIRONMENTAL BARRIER APPLIED IN THE CONTACT AREA.
 - BUSS BAR MUST HAVE A RADIUS ON THE MATING EDGE WITH NO SHARP EDGES/CORNERS.
 - REFER TO DRAWING SD-172201-0001 FOR ASSEMBLIES WITH SCREW MOUNT FEATURE.
 - DATE CODE FORMAT IS YYYYMMDD.



X - GATHERABILITY SEE NOTE 5



DATE CODE TO BE PRINTED IN THIS AREA SEE NOTE 11

(A1)

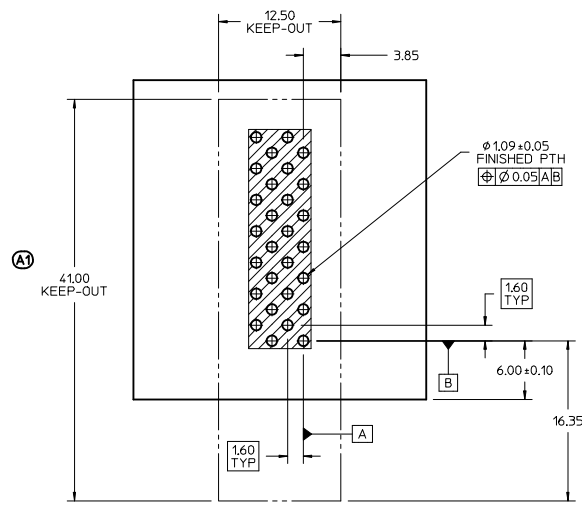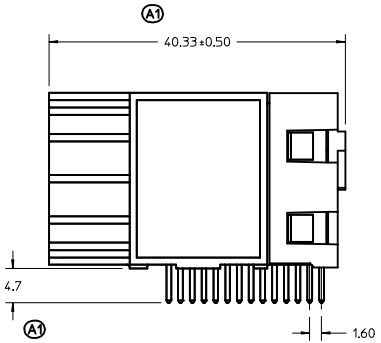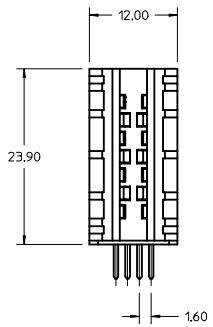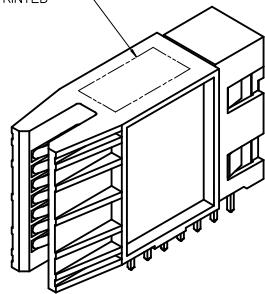


RECOMMENDED PCB LAYOUT
COMPONENT SIDE
3.18 MIN PCB THICKNESS

REVISED IEC NO. UICP2015-0227 DRAWN BY MBANDURA 2014/08/14 CHKD: APPR: APATEL 2014/09/18 REVISION DESCRIPTION A1	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	3:1	METRIC	☉
	▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ± --- ± ---	CHECKED BY DATE	ASSEMBLY, RECEPTACLE BUSS BAR CONNECTOR EXTREME POWERMASS		
▽=0	2 PLACES ± 0.25 ± ---	APPROVED BY DATE	molex			SHEET NO. 1 OF 2
▽=0	1 PLACE ± 0.38 ± ---	0 PLACE ± --- ± ---	MATERIAL NO.	DOCUMENT NO.		
	ANGULAR ±1/2°	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	SD-172201-0002		

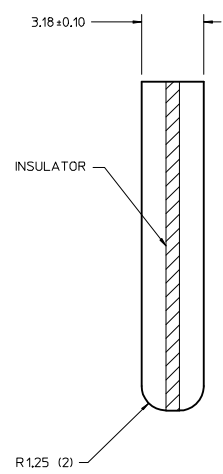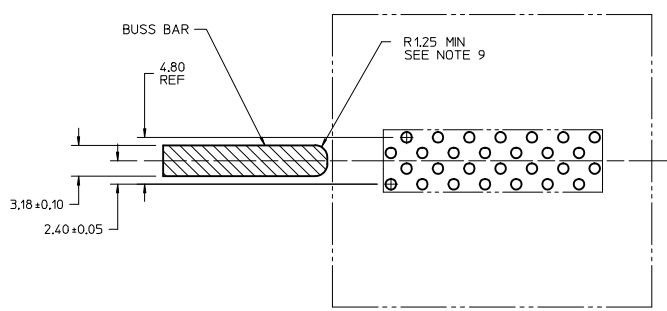


BUSS BAR

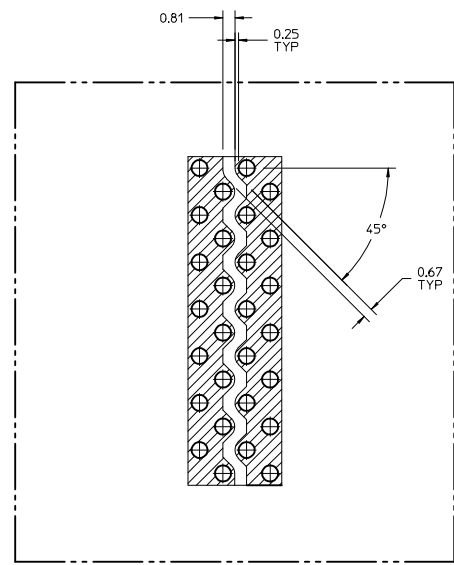

PAD LAYOUT

BUSS BAR & PAD LAYOUT
FOR 2 CIRCUIT APPLICATION

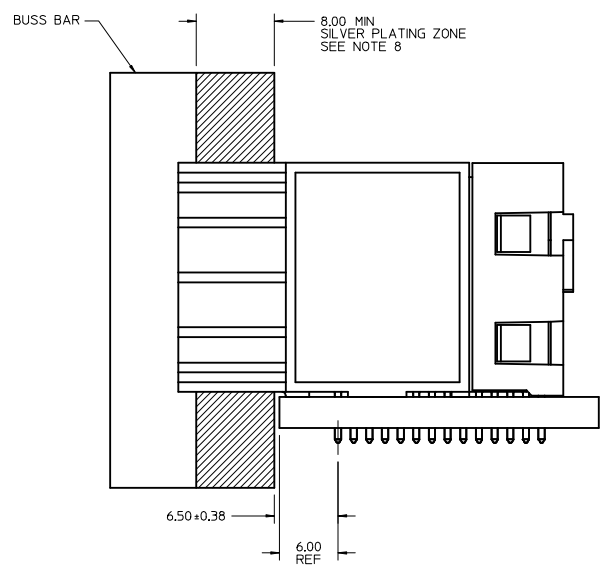

BUSS BAR MATING DIMENSIONS


SEE SHEET 1 IEC NO: UCP2015-0227 DRAWN BY: MBANDURA 2014/08/14 CHKD: CHYD: APPR: APATEL 2014/09/18 REV DESCRIPTION	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	4 PLACES	mm	INCH	MM ONLY		4:1	METRIC	☉
	▽=0	3 PLACES	±	---	DATE	DATE			
	▽=0	2 PLACES	±	0.25	DATE	DATE			
	1 PLACE	±	0.38	DATE	DATE				
	0 PLACE	±	---	DATE	DATE				
	ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
A1	SIZE D		SEE CHART		SD-172201-0002		SD-172201-0002		2 OF 2
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

ASSEMBLY, RECEPTACLE
BUSS BAR CONNECTOR
EXTREME POWERMASS

molex

ASSEMBLY MATERIAL NUMBER	DESCRIPTION	MOUNTING OPTION (SEE NOTE 10)
172201-0003	POWER RECEPTACLE ASSEMBLY - SOLDER TAIL	NONE





- NOTES:
- MATERIALS:
-HOUSING: GLASS FILLED, LCP 94V-0, COLOR: BLACK.
-TERMINALS: COPPER ALLOY.
 - FINISH:
-125 μ INCH MIN. SILVR PLATE IN CONTACT AREA ONLY.
-100 μ INCH MIN. SELECT TIN IN TAIL AREA OVER
-50 μ INCH MIN. NICKEL OVERALL.
 - LUBRICATION: EB4 IN CONTACT AREA.
 - REFERENCE DOCUMENT: PS-172201-001, AS-172201-001
 - MODULE ASSEMBLY IS RoHS COMPLIANT.
 - GATHERABILITY: ±1.80 FROM CENTER IN X-DIRECTION
 - RECOMMENDED PCB THICKNESS 3.18/125 MIN.
 - FINAL ASSEMBLY TO BE PACKAGED AND LABELED PER PACKAGING KIT DRAWING NUMBER PK-172201-001
 - BUSS BAR REQUIRES SILVER OVER NICKEL PLATING WITH AN ENVIRONMENTAL BARRIER APPLIED IN THE CONTACT AREA.
 - BUSS BAR MUST HAVE A RADIUS ON THE MATING EDGE WITH NO SHARP EDGES/CORNERS.
 - REFER TO DRAWING SD-172201-0001 FOR ASSEMBLIES WITH SCREW MOUNT FEATURE.
 - DATE CODE FORMAT IS YYYYMMDD.



X - GATHERABILITY SEE NOTE 5



DATE CODE TO BE PRINTED IN THIS AREA SEE NOTE 11

(A1)

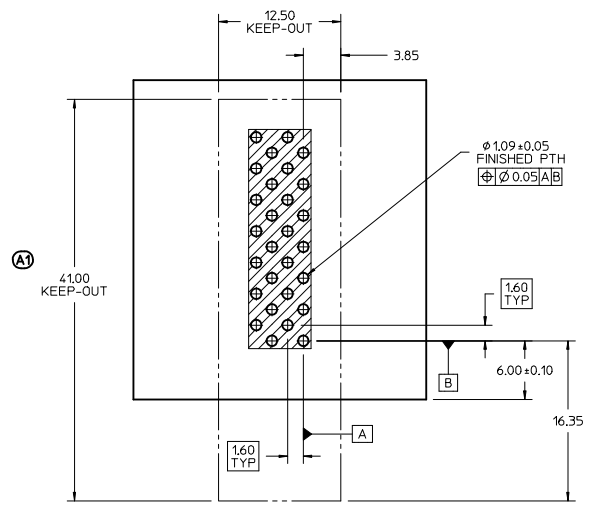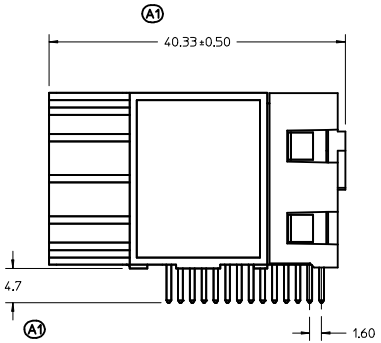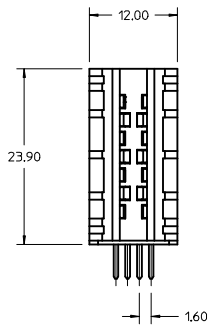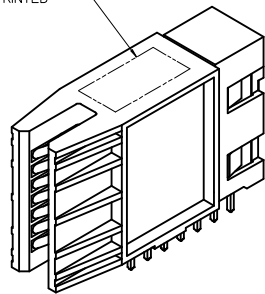


RECOMMENDED PCB LAYOUT
COMPONENT SIDE
3.18 MIN PCB THICKNESS


REVISED IEC NO. UICP2015-0227 DRAWN BY MBANDURA 2014/08/14 CHKD: APPR: APATEL 2014/09/18 REVISION DESCRIPTION A1	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	3:1	METRIC	☉
	▽=0	4 PLACES ±--- ±---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ±--- ±---	MBANDURA 2013/11/19	ASSEMBLY, RECEPTACLE BUSS BAR CONNECTOR EXTREME POWERMASS		
▽=0	2 PLACES ±0.25 ±---	CHECKED BY DATE	MATERIAL NO.			SHEET NO.
▽=0	1 PLACE ±0.38 ±---	PATEL 2013/12/20	APATEL 2014/01/29			1 OF 2
▽=0	0 PLACE ±--- ±---	APPROVED BY DATE	DOCUMENT NO.			
	ANGULAR ±1/2°		SEE CHART			SD-172201-0002
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

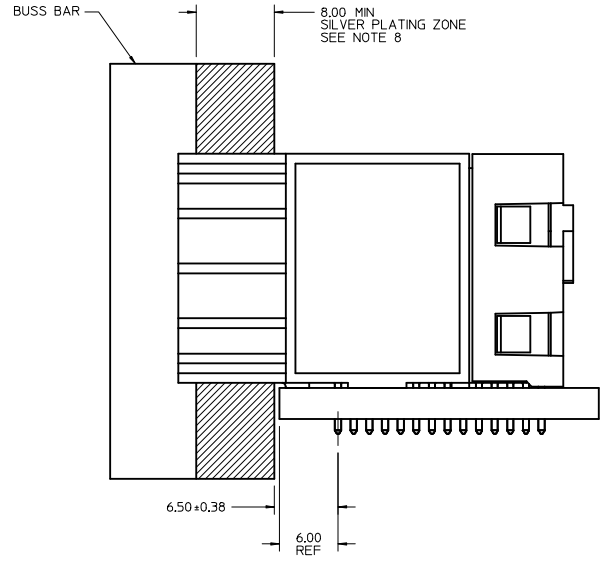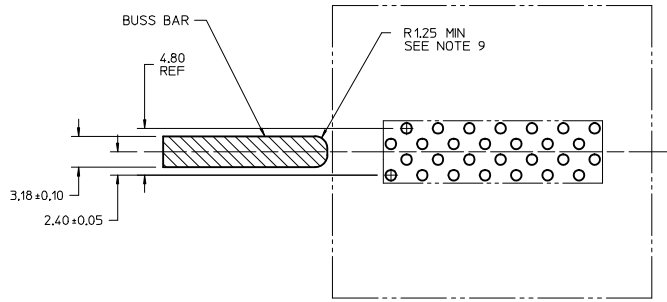

BUSS BAR MATING DIMENSIONS

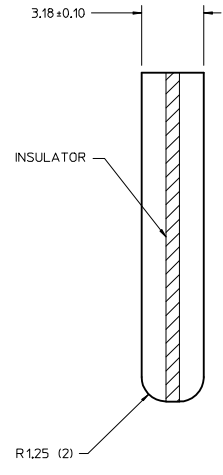

BUSS BAR

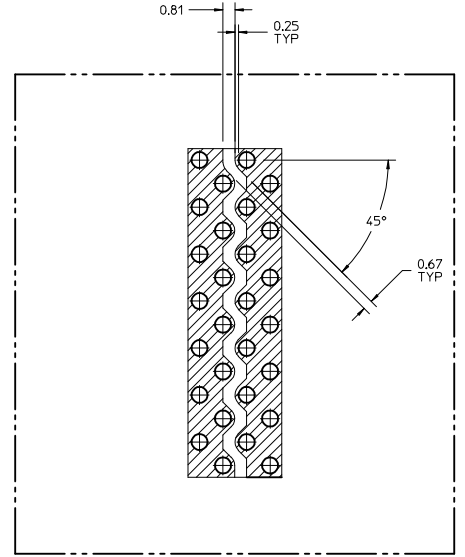

PAD LAYOUT

BUSS BAR & PAD LAYOUT FOR 2 CIRCUIT APPLICATION

SEE SHEET 1 IEC NO: UCP2015-0227 DRAWN BY: MBANDURA 2014/08/14 CHKD: CHYD: APPR: APATEL 2014/09/18 REV DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.25 ±--- 1 PLACE ±0.38 ±--- 0 PLACE ±--- ±--- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION STYLE MM ONLY DRAWN BY DATE MBANDURA 2013/11/19 CHECKED BY DATE PATEL 2013/12/20 APPROVED BY DATE APATEL 2014/01/29		SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION		TITLE ASSEMBLY, RECEPTACLE BUSS BAR CONNECTOR EXTREME POWERMASS molex MATERIAL NO. SEE CHART DOCUMENT NO. SD-172201-0002		SHEET NO. 2 OF 2	
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	SIZE D											
	IEC NO: UCP2015-0227 DRAWN BY: MBANDURA 2014/08/14 CHKD: CHYD: APPR: APATEL 2014/09/18											