

ITEM	PART#	DESCRIPTION	QTY	UOM
A	5055700401	2.0W/B SINGLE REC HSG 4CKT BLK	1	PC
B	5055721000	2.0W/B REC CRIMP TERM CHAIN H>F	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X22AWG DISC SR-PVC BK UL10002	BLACK

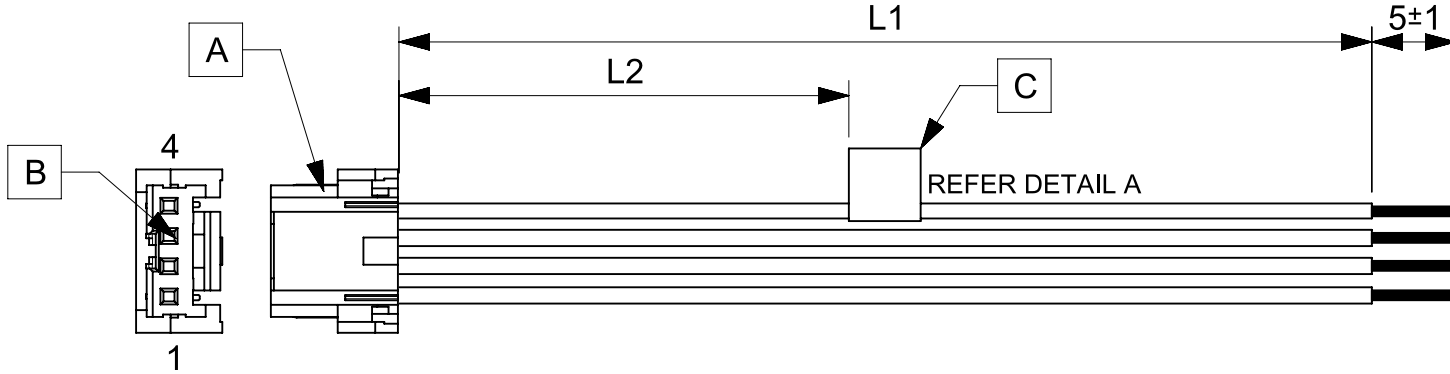


TABLE			
PART NUMBER	L1	L2(REF)	TITLE
2181021040	50±3	12	MICROLOCK PLUS 2.0 RS 4CKT 50MM DISC Sn
2181021041	100±5	37	MICROLOCK PLUS 2.0 RS 4CKT 100MM DISC Sn
2181021042	150±8	62	MICROLOCK PLUS 2.0 RS 4CKT 150MM DISC Sn
2181021043	300±10	137	MICROLOCK PLUS 2.0 RS 4CKT 300MM DISC Sn
2181021044	600±10	287	MICROLOCK PLUS 2.0 RS 4CKT 600MM DISC Sn

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/03/12	A	INITIAL RELEASE	AS20

- NOTES**
- CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
  - FREE ENDS MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIA MUST BE 0.9MM MAX.
  - LABEL TEXT MUST BE 2MM MAX IN HEIGHT WITH ARIAL FONT.
  - LABEL MUST BE WRAPPED IN FLAG TYPE.

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<b>molex</b>
	DIMENSION UNITS mm	SCALE NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)		
DIVISIONAL SYMBOLS	ANGULAR TOL ± °		EC NO: 665161		SEE TABLE
	4 PLACES ±		DRWN: AS20	2021/03/12	
	3 PLACES ±		CHK'D: RDESAI01	2021/05/26	PRODUCT CUSTOMER DRAWING
	2 PLACES ±		APPR: RDESAI01	2021/05/26	
	1 PLACE ±		INITIAL REVISION:		DOCUMENT NUMBER 2181021040
	0 PLACES ±		DRWN: AS20	2021/03/12	
			APPR: RDESAI01	2021/05/26	DOC TYPE PSD
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING A4-SIZE	SERIES 218102	DOC PART 000
					REVISION A
					SHEET NUMBER 1 OF 1