

# 3M™ Optically Clear Adhesive 9483

## Product Description

### 3M™ Optically Clear Adhesive 9483:

5.0 mils (125 microns) optically clear laminating adhesive for bonding wide web (up to 48") applications and high stress laminates.

## Product Construction

3M™ Optically Clear Adhesive 9483	
<b>Product Number</b>	
<b>Adhesive Type:</b>	Acrylic
<b>Adhesive Carrier</b>	None
<b>Approximate Thickness:</b>	
<b>Release Liner</b>	3.0 mil (75 micron) Polypropylene
<b>Adhesive</b>	5.0 mil (125 micron)
<b>Release Liner</b>	3.0 mil (75 micron) Polyester

## Typical Physical Properties and Performance Characteristics

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

### Refractive Index:

(± .0005 measured at 633 nm)

3M™ Optically Clear Adhesive  
9483

1.4740

### Haze:

Haze was measured according to ASTM D1003.

3M™ Optically Clear Adhesive  
9483

0.7%


### Transmission:

ASTM E903, D1003, and E284

### Reflective-Corrected Total Luminous

### Transmittance vs Wavelength

### 3M™ Optically Clear Adhesive 9483

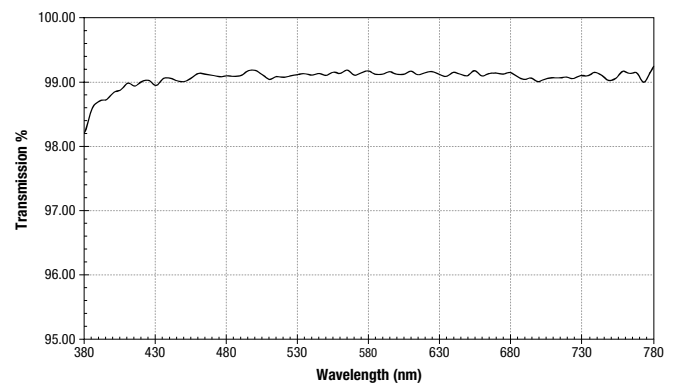

# 3M™ Optically Clear Adhesive 9483

## Typical Physical Properties and Performance Characteristics (continued)

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

### Optical Performance to Environmental Conditions:

3M™ Optically Clear Adhesives have withstood the following environmental tests conducted in the 3M laboratory under the conditions specified without any appreciable deterioration in visible appearance, physical integrity or optical performance. Over the entire test duration there was no significant change in transmission over the visible spectrum.

Substrate	Condition	Duration
High Temperature	+85°C	500 hours
Low Temperature	-40°C	500 hours
High Temp/Humidity	+70°C at 90% R.H.	500 hours
Thermal Shock	One hour at -40°C followed by one hour at +85°C	200 cycles
UV	ASTM G-26 Type B, BH	500 hours

### Peel Adhesion:

ASTM D3330 modified, 90° peel

Substrate		3M™ Optically Clear Adhesive 9483 <sup>1</sup>
Initial (20 minute dwell)	Glass	98 oz/in (107 N/100 mm)
	Acrylic	62 oz/in (68 N/100 mm)
	Polycarbonate	49 oz/in (54 N/100 mm)
72 Hour Room Temperature	Glass	98 oz/in (107 N/100 mm)
	Acrylic	62 oz/in (68 N/100 mm)
	Polycarbonate	41 oz/in (45 N/100 mm)

<sup>1</sup>90 degree peel, 12 in./min. 305 mm/min. 2.0 mil aluminum to various surfaces.

### Shear Adhesion:

ASTM D-3654 Procedure H

1/2" x 1" Overlap, minutes to failure.

3M™ Optically Clear Adhesive 9483	
Heat Aged (70°C) 500g, stainless steel	>10,000

### Chemical Resistance:

When properly applied, 3M™ Optically Clear Adhesives can withstand splashes of numerous chemicals including acetone, isopropyl alcohol, and cleaners.

### Water Resistance:

Immersion in water has no appreciable effect on the bond strength at room temperature.

### Relative Temperature Resistance:

Short Term High Temperature 350°F (177°C)

Long Term High Temperature 185°F (85°C)

Long Term Low Temperature -40°F (-40°C)

### Shelf Life:

Product retains its performance and properties for two years from date of manufacture if properly stored at room temperature conditions of 72°F (22°C) and 50 relative humidity. Storage in plastic bag is recommended.

## Available Sizes

Available Lengths (subject to minimum order requirements): Maximum length - 3M™ Optically Clear Adhesive 9483	180 yards or 540 feet
Available Widths (subject to minimum order requirements): Maximum width - 3M™ Optically Clear Adhesive 9483	48 inches
Normal Slitting Tolerance	± 1/32 in. (0.8 mm)
Core Size	3.0 in. (76.2 mm)

# 3M™ Optically Clear Adhesive 9483

## Application Techniques

For maximum bond strength the surface should be thoroughly cleaned and dried. To obtain greatest benefit, laminations should be done in the cleanest environment possible with static charge elimination.

Bond strength can be improved with firm application pressure and moderate heat causing the adhesive to develop intimate contact with the bonding surface.

## General Information

- Light transmission >99% when corrected for reflection losses.
- Haze level < 1%.
- Free of birefringence with no film carrier.
- High temperature, humidity, and UV resistance.
- Long term durability without yellowing, delaminating, or degrading.
- High cohesive and peel strength for reliably bonding most transparent substrates.
- 3M™ Optically Clear Adhesive 9483 is coated using clean practices.
- 3M optically clear adhesives are inspected to reduce the occurrence of bubbles, dirt, gels and other optical distortions.
- Wound on plastic cores and wrapped in plastic to eliminate paper fiber contamination.
- Two film liners for optimum adhesive smoothness and differential release for ease of processing and protection from contamination.
- 3M™ Optically Clear Adhesives are available in other thicknesses. Please contact 3M to discuss your application if you require a thickness that is not included in this data page.

## Application Ideas

- Touchscreens- for bonding film and glass laminates.
- Transparent graphic overlays.
- Projection screens.
- Avionics/military displays.
- Optical management films for LCD

### **Processing:**

#### **Laminating**

Recommended nip roll or roller platen press type laminator to maintain optical aesthetics when laminated. Hand lamination not advised. Use best process control standards possible to control variables. (See **3M Laminating Technical Bulletin** for additional information.)

#### **Die-cutting**

Use high precision, tight tolerance tooling designed to cleanly cut film and pressure-sensitive adhesive.

# 3M™ Optically Clear Adhesive 9483

## Certification/Recognition

**MSDS:** 3M has not prepared a MSDS for this product which is not subject to the MSDS requirements of the Occupational Safety and Health Administration's Hazard Communication Standard, 29 C.F.R. 1910.1200(b)(6)(v). When used under reasonable conditions or in accordance with the 3M directions for use, the product should not present a health and safety hazard. However, use or processing of the product in a manner not in accordance with the directions for use may affect its performance and present potential health and safety hazards.

**TSCA:** This product is defined as an article under the Toxic Substances Control Act and therefore, it is exempt from inventory listing requirements.

**RoHS:** This product complies with the requirements of EU Directive 2002/95/EC and 2005/618/EC.

## For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-800-251-8634. Address correspondence to: 3M Electronics Markets Materials Division, Building 21-1W-10, 900 Bush Avenue, St. Paul, MN 55144-1000. Our fax number is 651-778-4244 or 1-877-369-2923.

In Canada, phone: 1-800-364-3577.

In Puerto Rico, phone: 1-787-750-3000.

In Mexico, phone: 52-70-04-00.

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

## Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



### Electronics Markets Materials Division 3M Electronics

3M Center, Building 21-1W-10, 900 Bush Avenue  
St. Paul, MN 55144-1000  
1-800-251-8634 phone  
651-778-4244 fax  
www.3M.com/electronics

3M is a trademark of 3M Company.  
Please recycle. Printed in U.S.A.  
©3M 2008. All rights reserved.  
60-5002-0351-2

