

ACT20M ACT20M-TCI-AO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



ACT20M: The slim solution

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Type	ACT20M-TCI-AO-S
Order No.	1375480000
Version	Temperature converter, Thermocouple, Input : Temperature, Output : I / U
GTIN (EAN)	4050118259650
Qty.	1 pc(s).

ACT20M
ACT20M-TCI-AO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	6.1 mm	Width (inches)	0.24 inch
Height	112.5 mm	Height (inches)	4.429 inch
Depth	114.3 mm	Depth (inches)	4.5 inch
Net weight	84 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	
Ambient temperature	-25 °C...+70 °C	Storage temperature	-40 °C...85 °C

Probability of failure

MTBF	147 Years		
------	-----------	--	--

Input

Number of inputs	1	Sensor	Thermocouple (type J, K)
Input measurement range	Thermocouple type J -100...+1200°C, Thermocouple type K -200...+1370°C	Temperature input range	Configurable, min. measurement range 50°C (TC)

Output

Number of outputs	1	Output voltage, note	configurable, 0(2)...10 V, 0(1)...5 V
Output current	configurable, 0...20 mA, 4...20 mA	Wire break detection	Configurable, 3.5 mA / 23 mA / none
cold junction compensation	configurable internal or external cold- junction compensation (thermocouple)	load impedance voltage	≥ 10 kΩ
load impedance current	≤ 600 Ω		

General data

Accuracy	absolute accuracy: < ±0.05 % of the measurement range, Basic accuracy: < ±0.5°	Configuration	DIP switch
Galvanic isolation	3-way isolator	Mounting rail	TS 35
Power consumption, max.	0.7 W	Power consumption, typ.	0.49 W
Step response time	≤ 30 ms, < 300 ms, Configurable	Supply voltage	24 V DC ± 30 %
Temperature coefficient	0,1 °C/°C, or, ≤0,01% des Messbereichs°C		

Insulation coordination

EMC standards	IEC 61326-1, NE 21	Galvanic isolation	3-way isolator
Insulation voltage	2.5 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V _{eff}	Surge voltage category	II

ACT20M
ACT20M-TCI-AO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Data for Ex applications (ATEX)

Marking II 3 G Ex nA IIC T4 Gc

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Rated data UL

UL certificate E337701.pdf

Ratings IECEx/ATEX/cUL

Certificate No. (ATEX) KEMA10ATEX0183X Certificate No. (IECEX) IECEXKEM10.0090X

Classifications

ETIM 5.0	EC002653	ETIM 6.0	EC002919
eClass 6.2	27-21-01-20	eClass 7.1	27-21-01-20
eClass 8.1	27-21-01-20	eClass 9.0	27-21-01-20
eClass 9.1	27-21-01-29		

Product information

Instructions for accessories DIN mounting rail, see accessories

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
Software	DIP switch configuration tool
User Documentation	instruction sheet

Creation date October 8, 2018 8:12:54 PM CEST



Catalogue status 28.09.2018 / We reserve the right to make technical changes.

**ACT20M
ACT20M-TCI-AO-S**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Connection diagram

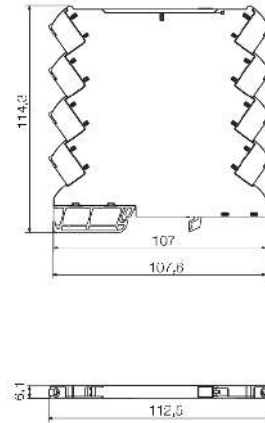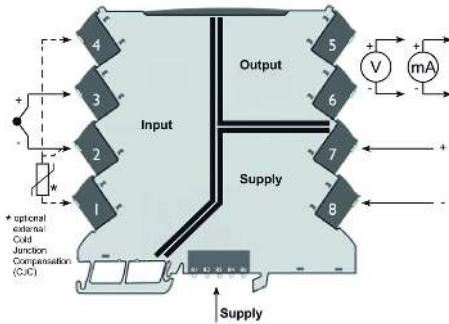

DIP switch configuration


TC sensor type	S1	Temperature range [°C]																																																																																																		
		Min.	Max.	Temp.	Temp.	Temp.	Temp.	Temp.	Temp.	Temp.	Temp.																																																																																									
TC sensor type	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

... (rest of the table content is truncated for brevity)

example for DIP switch setting (with ACT20M tool software)



example for DIP switch setting (with ACT20M tool software)

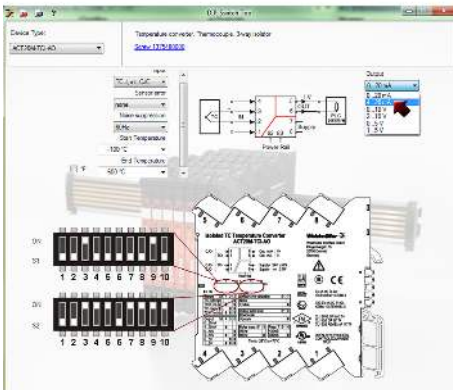

example for DIP switch setting (with ACT20M tool software)