

**NOTES:**

**ELECTRICAL:**


1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE I=0.35mm.
3. PLATING : 6μ" GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER : 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.
3. IR REFLOW SOLDERING TEMPERATURE: 255°C TO 265°C (5-10 SECONDS).

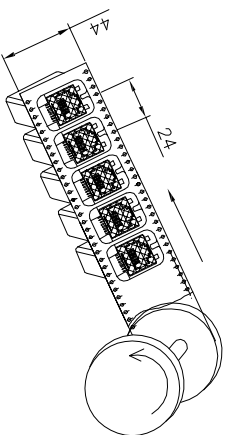

**RoHS compliant**



File No.: E345352

Scale	1:1						
TOLERANCE							
.X	±0.20						
.XX	±0.15						
.XXX	±0.10						
DIM	TOL						
Angle	±5°						
		Ⓛ	Add the Mylar foil	20.01.2016	Winnie		
		Ⓧ	Drawn	03.02.2012	Lucas		
			Modification				
		Id.					

**ASSMANN**  
WSW components

Date	Name
03.02.2012	Lucas
20.01.2016	Winnie

Customer-No.	ASSMANN WSW-No.	
	ASS 4664 CO	AMJ-188-1001100-N
Drawing-No.	Replace	rev01
Sheet		

1 2 3 4 5 6 7

K413