

## VERY LOW DROP 1.5A REGULATORS

- PRECISE 5, 8.5, 10, 12V OUTPUTS
- LOW DROPOUT VOLTAGE  
(500mV Typ. at 1.5A)
- VERY LOW QUIESCENT CURRENT
- THERMAL SHUTDOWN
- SHORT CIRCUIT PROTECTION
- REVERSE POLARITY PROTECTION

### DESCRIPTION

The L4940 series of three terminal positive regulators is available in TO-220, TO-220FP and D<sup>2</sup>PAK packages and with several fixed output voltages, making it useful in a wide range of industrial and consumer applications. Thanks to its very low input/output voltage drop, these devices are particularly suitable for batteries powered equipment, reducing consumption and prolonging battery life. Each type employs internal current limiting, antisaturation circuit, thermal shut-down and safe area protection.


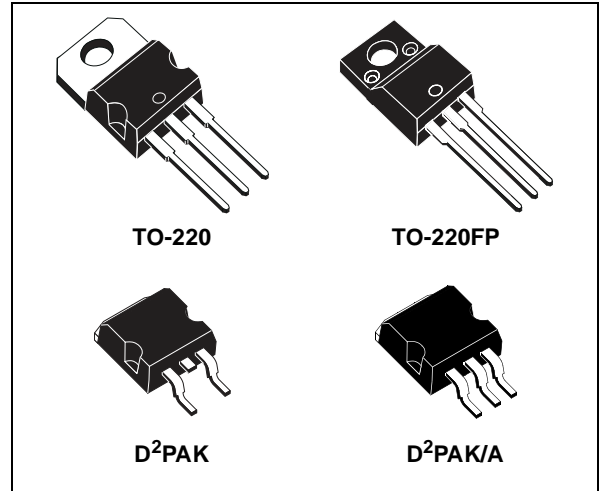


Figure 1: Block Diagram

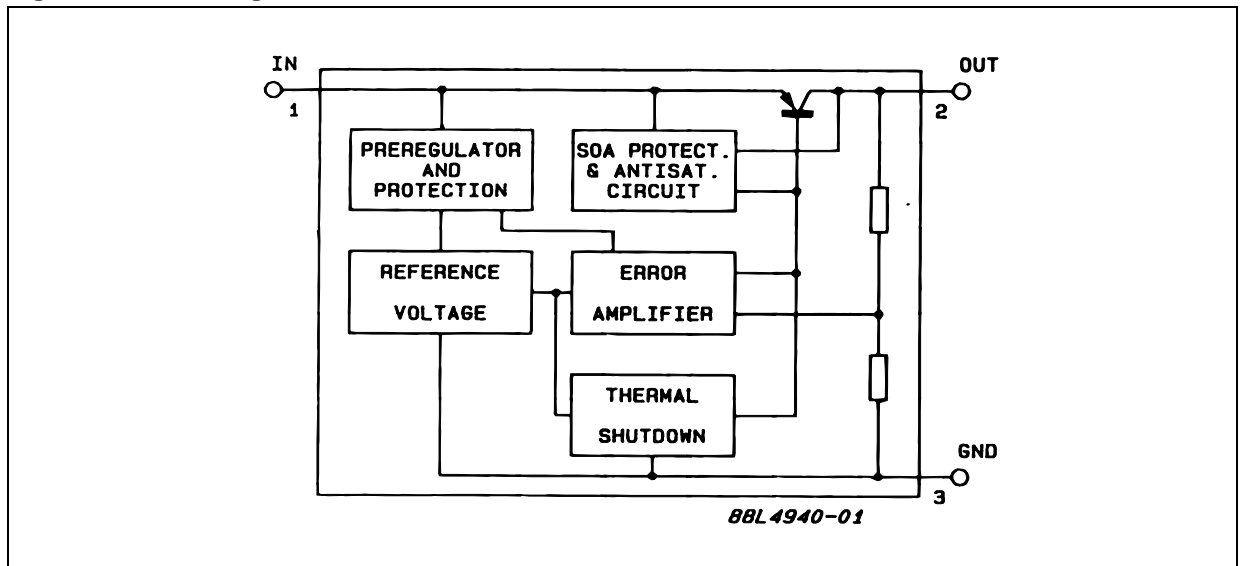

**Table 1: Absolute Maximum Ratings**


| Symbol    | Parameter                            | Value                      | Unit |
|-----------|--------------------------------------|----------------------------|------|
| $V_I$     | Forward Input Voltage                | 30                         | V    |
| $V_{IR}$  | Reverse Input Voltage                | $V_O=5V$ $R_O=100\Omega$   | -15  |
|           |                                      | $V_O=8.5V$ $R_O=180\Omega$ | -15  |
|           |                                      | $V_O=10V$ $R_O=200\Omega$  | -15  |
|           |                                      | $V_O=12V$ $R_O=240\Omega$  | -15  |
| $I_O$     | Output Current                       | Internally Limited         | mA   |
| $P_D$     | Power Dissipation                    | Internally Limited         | mW   |
| $T_{stg}$ | Storage Temperature Range            | -40 to +150                | °C   |
| $T_{op}$  | Operating Junction Temperature Range | -40 to +150                | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

**Table 2: Thermal Data**

| Symbol         | Parameter                           | TO-220 | TO-220FP | D <sup>2</sup> PAK | Unit |
|----------------|-------------------------------------|--------|----------|--------------------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case    | 3      | 5        | 3                  | °C/W |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient | 50     | 60       | 62.5               | °C/W |

**Figure 2: Connection Diagram (top view)**

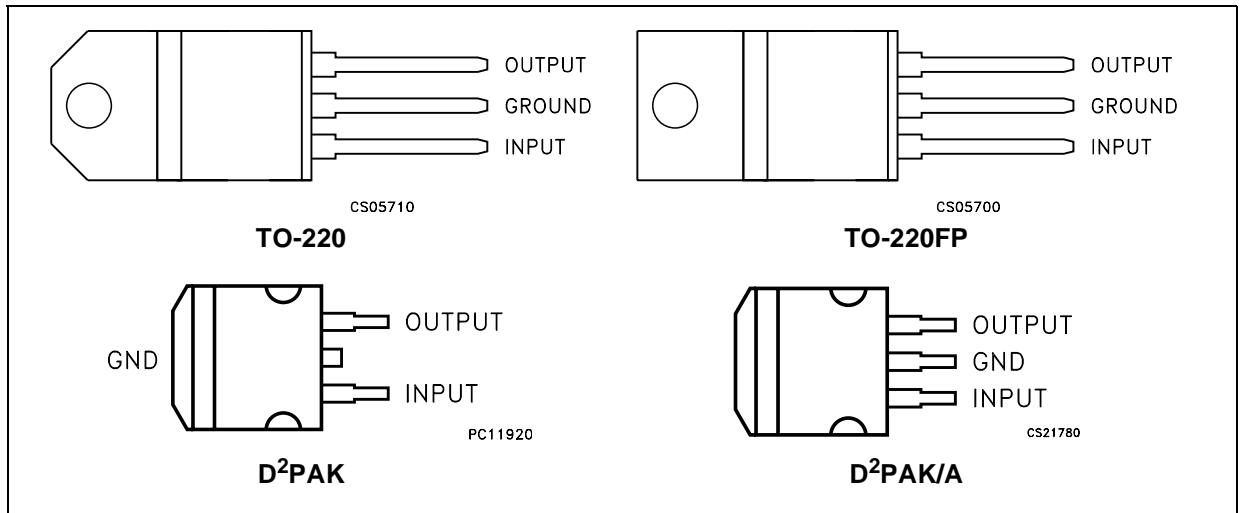

**Table 3: Order Codes**

| TO-220   | TO-220FP | D <sup>2</sup> PAK (*) | D <sup>2</sup> PAK/A (**) | OUTPUT VOLTAGE |
|----------|----------|------------------------|---------------------------|----------------|
| L4940V5  | L4940P5  | L4940D2T5              | L4940D2M5                 | 5 V            |
| L4940V85 | L4940P85 | L4940D2T85             | L4940D2M85                | 8.5 V          |
| L4940V10 | L4940P10 | L4940D2T10             | L4940D2M10                | 10 V           |
| L4940V12 | L4940P12 | L4940D2T12             | L4940D2M12                | 12 V           |

(\*) Available in Tape & Reel with the suffix "-TR".

(\*\*) Available on Request.

## TEST CIRCUITS

Figure 3: DC Parameter

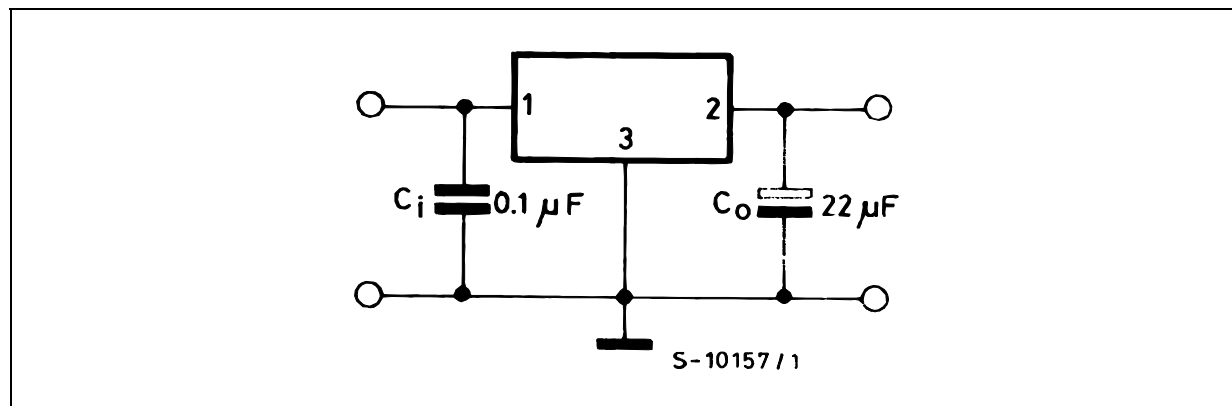


Figure 4: Load Rejection


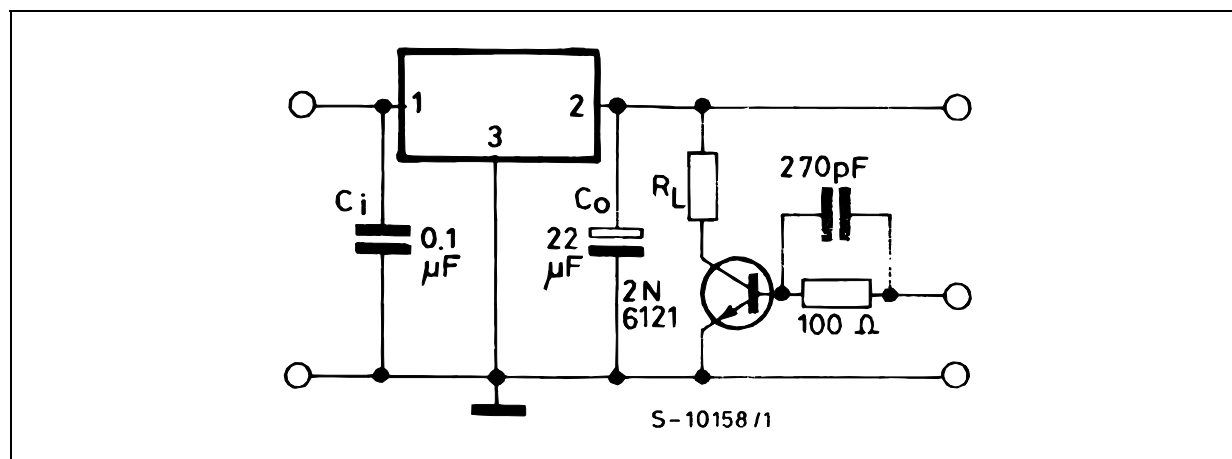


Figure 5: Ripple Rejection

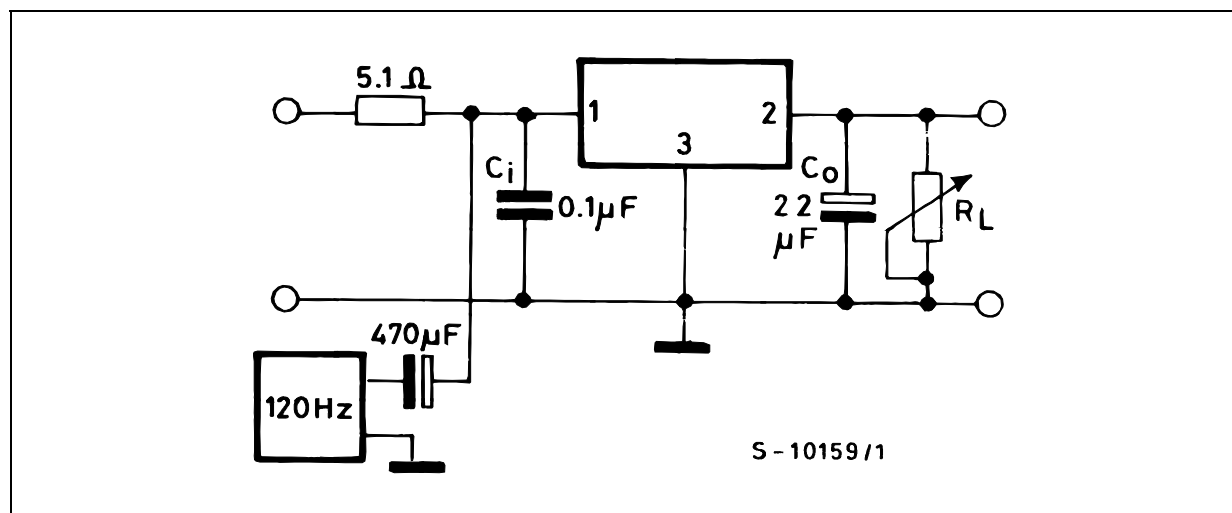

**Table 4: Electrical Characteristics Of L4940V5** (Refer to test circuit,  $V_I=7V$ ,  $C_I = 0.1\mu F$ ,  $C_O = 22\mu F$ ,  $T_J = 25^\circ C$ , unless otherwise specified.)

| Symbol                | Parameter                | Test Conditions  | Min. | Typ. | Max. | Unit           |
|-----------------------|--------------------------|--|------|------|------|----------------|
| $V_O$                 | Output Voltage           | $I_O = 500\text{ mA}$  | 4.9  | 5    | 5.1  | V              |
| $V_O$                 | Output Voltage           | $I_O = 5\text{mA to } 1.5\text{A}$ $V_I = 6.5\text{ to } 15\text{V}$ | 4.8  | 5    | 5.2  | V              |
| $V_I$                 | Input Voltage            | $I_O = 5\text{ mA}$  |      |      | 17   | V              |
| $\Delta V_O$          | Line Regulation          | $V_I = 6\text{ to } 17\text{V}$ $I_O = 5\text{ mA}$                  |      | 4    | 10   | mV             |
| $\Delta V_O$          | Load Regulation          | $I_O = 5\text{mA to } 1.5\text{A}$                                   |      | 8    | 25   | mV             |
|                       |                          | $I_O = 0.5\text{A to } 1\text{A}$                                    |      | 5    | 15   | mV             |
| $I_q$                 | Quiescent Current        | $I_O = 5\text{ mA}$  |      | 5    | 8    | mA             |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 6.5\text{V}$                              |      | 30   | 50   | mA             |
| $\Delta I_q$          | Quiescent Current Change | $I_O = 5\text{ mA}$  |      |      | 3    | mA             |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 6.5\text{ to } 16\text{V}$                |      |      | 15   | mA             |
| $\Delta V_O/\Delta T$ | Output Voltage Drift     |  |      | 0.5  |      | mv/ $^\circ C$ |
| SVR                   | Supply Voltage Rejection | $f = 120\text{Hz}$ $I_O = 1\text{A}$                                 | 58   | 68   |      | dB             |
| $V_d$                 | Dropout Voltage          | $I_O = 0.5\text{A}$  |      | 200  | 400  | mV             |
|                       |                          | $I_O = 1.5\text{A}$  |      | 500  | 900  | mV             |
| $I_{sc}$              | Short Circuit Current    | $V_I = 14\text{V}$   |      | 2    | 2.7  | A              |
|                       |                          | $V_I = 6.5\text{V}$  |      | 2.2  | 2.9  |                |

**Table 5: Electrical Characteristics Of L4940V85** (Refer to test circuit,  $V_I=10.5V$ ,  $C_I = 0.1\mu F$ ,  $C_O = 22\mu F$ ,  $T_J = 25^\circ C$ , unless otherwise specified.)

| Symbol                | Parameter                | Test Conditions   | Min. | Typ. | Max. | Unit           |
|-----------------------|--------------------------|---|------|------|------|----------------|
| $V_O$                 | Output Voltage           | $I_O = 500\text{ mA}$   | 8.3  | 8.5  | 8.7  | V              |
| $V_O$                 | Output Voltage           | $I_O = 5\text{mA to } 1.5\text{A}$ $V_I = 10.2\text{ to } 16\text{V}$ | 8.15 | 8.5  | 8.85 | V              |
| $V_I$                 | Input Voltage            | $I_O = 5\text{ mA}$   |      |      | 17   | V              |
| $\Delta V_O$          | Line Regulation          | $V_I = 9.5\text{ to } 17\text{V}$ $I_O = 5\text{ mA}$                 |      | 4    | 9    | mV             |
| $\Delta V_O$          | Load Regulation          | $I_O = 5\text{mA to } 1.5\text{A}$                                    |      | 12   | 30   | mV             |
|                       |                          | $I_O = 0.5\text{A to } 1\text{A}$                                     |      | 8    | 16   | mV             |
| $I_q$                 | Quiescent Current        | $I_O = 5\text{ mA}$   |      | 4    | 8    | mA             |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 10.2\text{V}$                              |      | 30   | 50   | mA             |
| $\Delta I_q$          | Quiescent Current Change | $I_O = 5\text{ mA}$   |      |      | 2.5  | mA             |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 10.2\text{ to } 16\text{V}$                |      |      | 15   | mA             |
| $\Delta V_O/\Delta T$ | Output Voltage Drift     |   |      | 0.8  |      | mv/ $^\circ C$ |
| SVR                   | Supply Voltage Rejection | $f = 120\text{Hz}$ $I_O = 1\text{A}$                                  | 58   | 66   |      | dB             |
| $V_d$                 | Dropout Voltage          | $I_O = 0.5\text{A}$   |      | 200  | 400  | mV             |
|                       |                          | $I_O = 1.5\text{A}$   |      | 500  | 900  | mV             |
| $I_{sc}$              | Short Circuit Current    | $V_I = 14\text{V}$  |      | 2    | 2.7  | A              |
|                       |                          | $V_I = 10.2\text{V}$  |      | 2.2  | 2.9  |                |

**Table 6: Electrical Characteristics Of L4940V10** (Refer to test circuit,  $V_I=12V$ ,  $C_I = 0.1\mu F$ ,  $C_O = 22\mu F$ ,  $T_J = 25^\circ C$ , unless otherwise specified.)

| Symbol                | Parameter                | Test Conditions   | Min. | Typ. | Max. | Unit  |
|-----------------------|--------------------------|---|------|------|------|-------|
| $V_O$                 | Output Voltage           | $I_O = 500\text{ mA}$   | 9.8  | 10   | 10.2 | V     |
| $V_O$                 | Output Voltage           | $I_O = 5\text{mA to } 1.5\text{A}$ $V_I = 11.7\text{ to } 15\text{V}$ | 9.6  | 10   | 10.4 | V     |
| $V_I$                 | Input Voltage            | $I_O = 5\text{ mA}$   |      |      | 17   | V     |
| $\Delta V_O$          | Line Regulation          | $V_I = 11\text{ to } 17\text{V}$ $I_O = 5\text{ mA}$                  |      | 3    | 8    | mV    |
| $\Delta V_O$          | Load Regulation          | $I_O = 5\text{mA to } 1.5\text{A}$                                    |      | 15   | 35   | mV    |
|                       |                          | $I_O = 0.5\text{A to } 1\text{A}$                                     |      | 10   | 20   | mV    |
| $I_q$                 | Quiescent Current        | $I_O = 5\text{ mA}$   |      | 5    | 8    | mA    |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 11.7\text{V}$                              |      | 30   | 50   | mA    |
| $\Delta I_q$          | Quiescent Current Change | $I_O = 5\text{ mA}$   |      |      | 2    | mA    |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 11.7\text{ to } 16\text{V}$                |      |      | 13   | mA    |
| $\Delta V_O/\Delta T$ | Output Voltage Drift     |   |      | 1    |      | mv/°C |
| SVR                   | Supply Voltage Rejection | $f = 120\text{Hz}$ $I_O = 1\text{A}$                                  | 56   | 62   |      | dB    |
| $V_d$                 | Dropout Voltage          | $I_O = 0.5\text{A}$   |      | 200  | 400  | mV    |
|                       |                          | $I_O = 1.5\text{A}$   |      | 500  | 900  | mV    |
| $I_{sc}$              | Short Circuit Current    | $V_I = 14\text{V}$  |      | 2    | 2.7  | A     |
|                       |                          | $V_I = 11.7\text{V}$  |      | 2.2  | 2.9  |       |

**Table 7: Electrical Characteristics Of L4940V12** (Refer to test circuit,  $V_I=14V$ ,  $C_I = 0.1\mu F$ ,  $C_O = 22\mu F$ ,  $T_J = 25^\circ C$ , unless otherwise specified.)

| Symbol                | Parameter                | Test Conditions   | Min.  | Typ. | Max.  | Unit  |
|-----------------------|--------------------------|---|-------|------|-------|-------|
| $V_O$                 | Output Voltage           | $I_O = 500\text{ mA}$   | 11.75 | 12   | 12.25 | V     |
| $V_O$                 | Output Voltage           | $I_O = 5\text{mA to } 1.5\text{A}$ $V_I = 13.8\text{ to } 15\text{V}$ | 11.5  | 12   | 12.5  | V     |
| $V_I$                 | Input Voltage            | $I_O = 5\text{ mA}$   |       |      | 17    | V     |
| $\Delta V_O$          | Line Regulation          | $V_I = 13\text{ to } 17\text{V}$ $I_O = 5\text{ mA}$                  |       | 3    | 7     | mV    |
| $\Delta V_O$          | Load Regulation          | $I_O = 5\text{mA to } 1.5\text{A}$                                    |       | 15   | 35    | mV    |
|                       |                          | $I_O = 0.5\text{A to } 1\text{A}$                                     |       | 10   | 25    | mV    |
| $I_q$                 | Quiescent Current        | $I_O = 5\text{ mA}$   |       | 4    | 8     | mA    |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 13.8\text{V}$                              |       | 30   | 50    | mA    |
| $\Delta I_q$          | Quiescent Current Change | $I_O = 5\text{ mA}$   |       |      | 1.5   | mA    |
|                       |                          | $I_O = 1.5\text{A}$ $V_I = 13.8\text{ to } 16\text{V}$                |       |      | 10    | mA    |
| $\Delta V_O/\Delta T$ | Output Voltage Drift     |   |       | 1.2  |       | mv/°C |
| SVR                   | Supply Voltage Rejection | $f = 120\text{Hz}$ $I_O = 1\text{A}$                                  | 55    | 61   |       | dB    |
| $V_d$                 | Dropout Voltage          | $I_O = 0.5\text{A}$   |       | 200  | 400   | mV    |
|                       |                          | $I_O = 1.5\text{A}$   |       | 500  | 900   | mV    |
| $I_{sc}$              | Short Circuit Current    | $V_I = 14\text{V}$  |       | 2    | 2.7   | A     |
| $Z_O$                 | Output Impedance         | $f = 120\text{Hz}$ $I_O = 0.5\text{A}$                                |       | 40   |       | mΩ    |

TYPICAL CHARACTERISTICS

Figure 6: Dropout Voltage vs Output Current

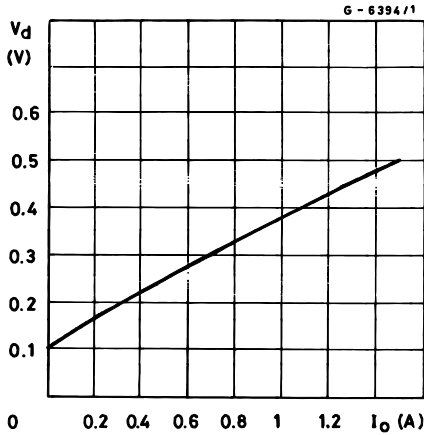


Figure 9: Output Voltage vs Temperature (L4940V85)

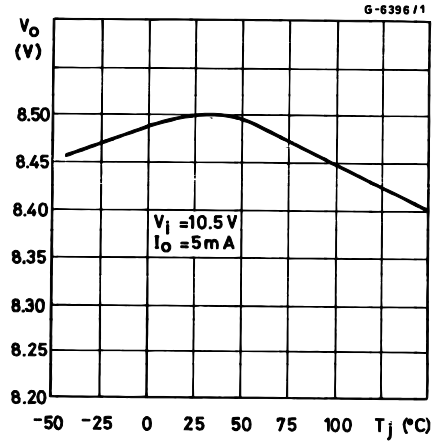


Figure 7: Dropout Voltage vs Temperature

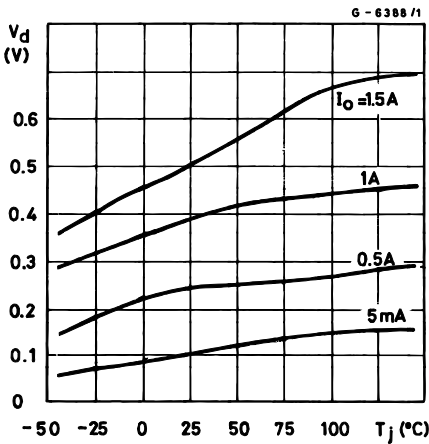


Figure 10: Output Voltage vs Temperature (L4940V10)

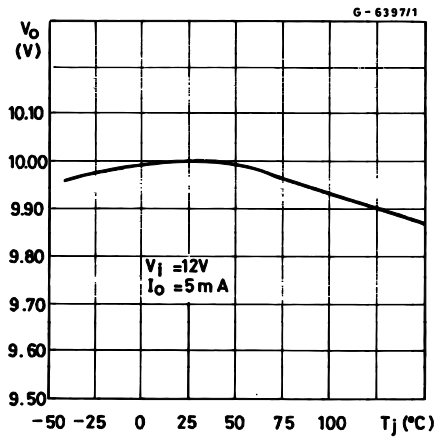


Figure 8: Output Voltage vs Temperature (L4940V5)



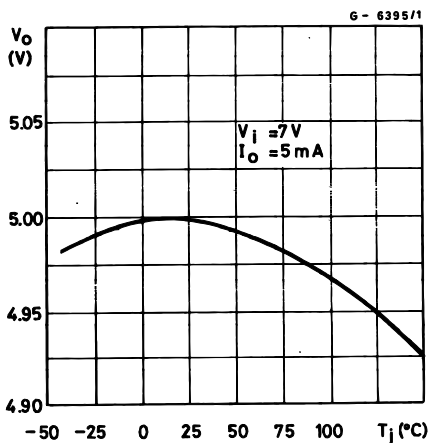



Figure 11: Output Voltage vs Temperature (L4940V12)

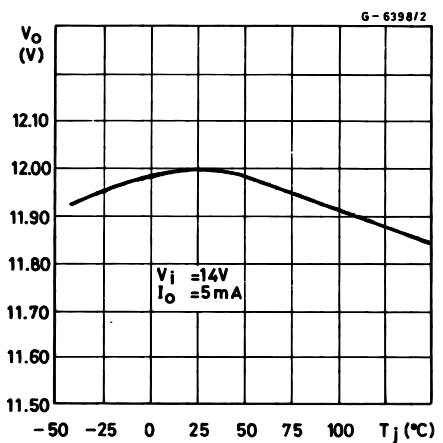


**Figure 12:** Quiescent Current vs Temperature (L4940V5)

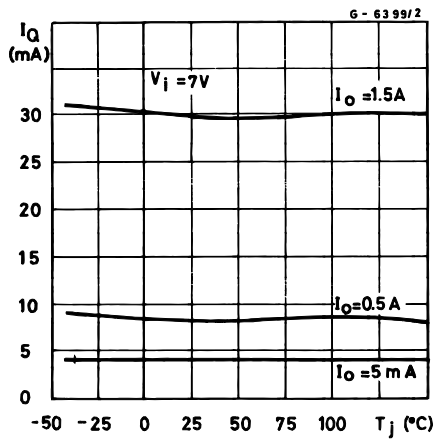


**Figure 15:** Short Circuit Current vs Temperature (L4940V5)

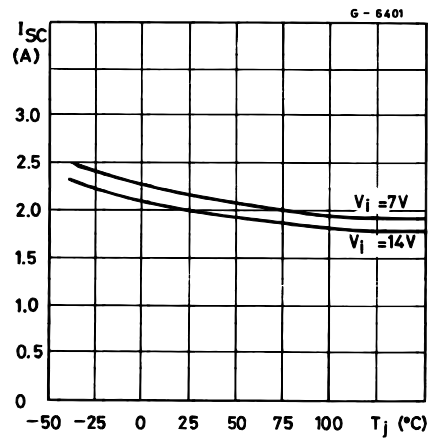


**Figure 13:** Quiescent Current vs Input Voltage (L4940V5)

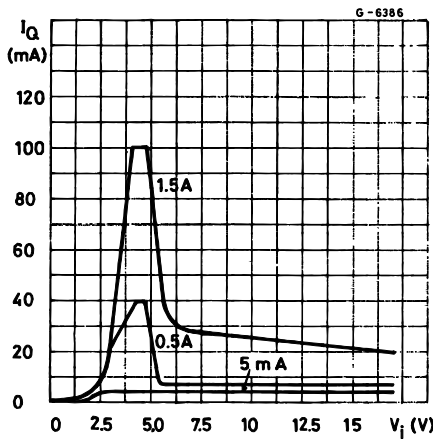

**Figure 16:** Peak Output Current vs Input/Output Differential Voltage (L4940V5)

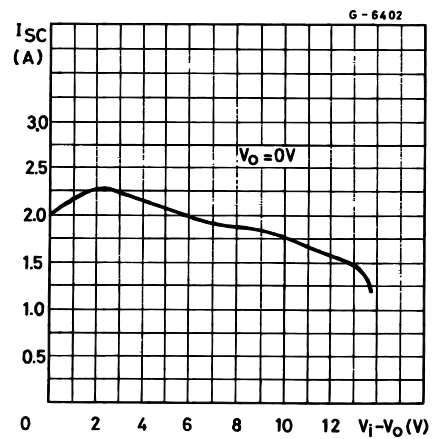

**Figure 14:** Quiescent Current vs Output Current (L4940V5)

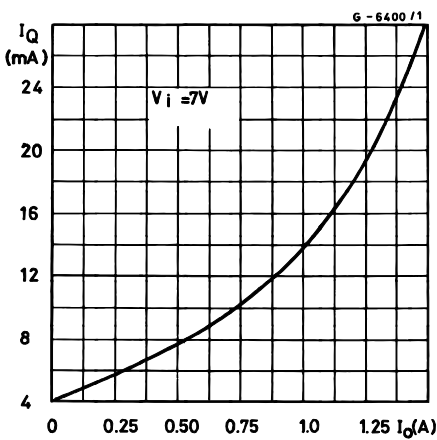

**Figure 17:** Low Voltage Behavior (L4940V5)

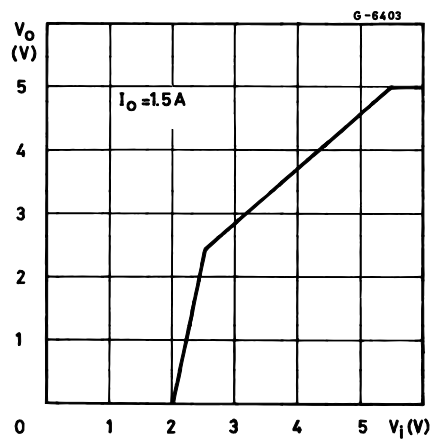


Figure 18: Low Voltage Behavior (L4940V85)

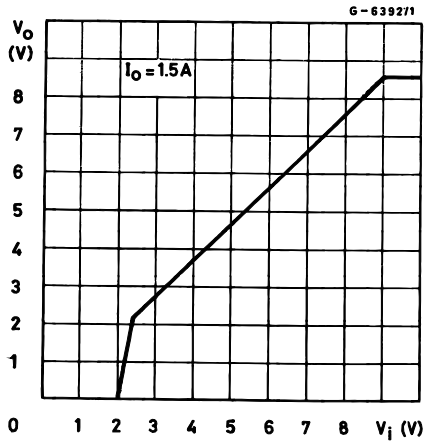


Figure 19: Low Voltage Behavior (L4940V10)

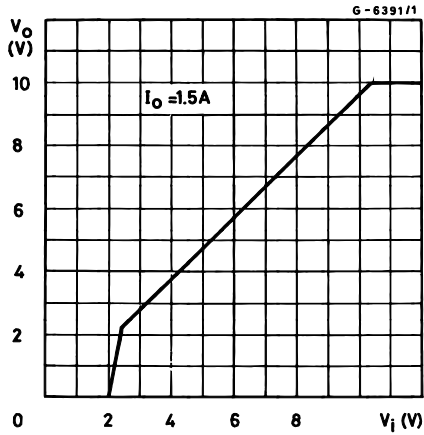


Figure 20: Low Voltage Behavior (L4940V12)

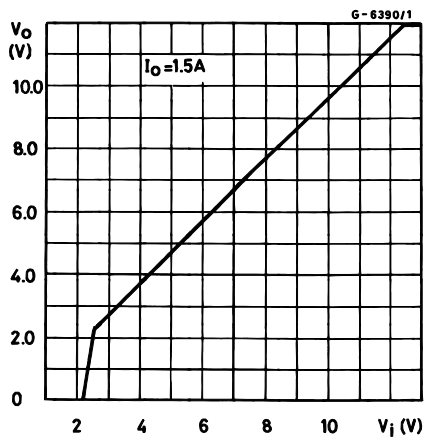


Figure 21: Supply Voltage Rejection vs Frequency (L4940V5)

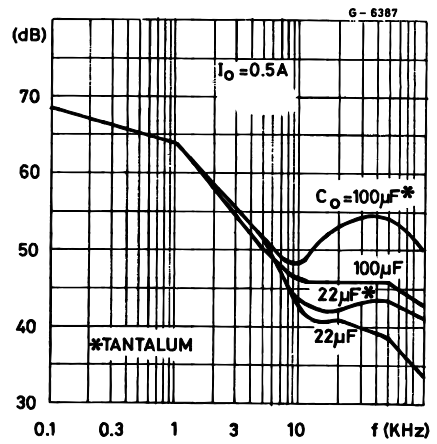


Figure 22: Supply Voltage Rejection vs Output Current (L4940V5)

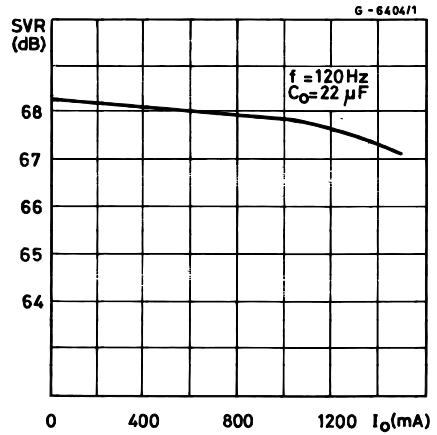


Figure 23: Lad Dump Characteristics (L4940V5)

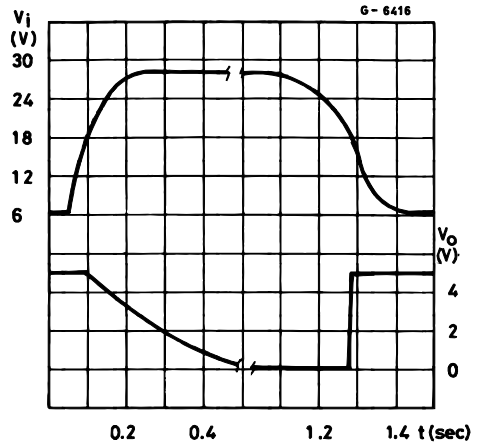




Figure 24: Line Transient Response (L4940V5)

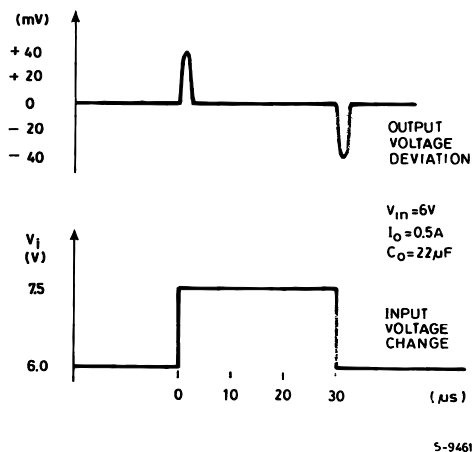


Figure 26: Load Transient Response

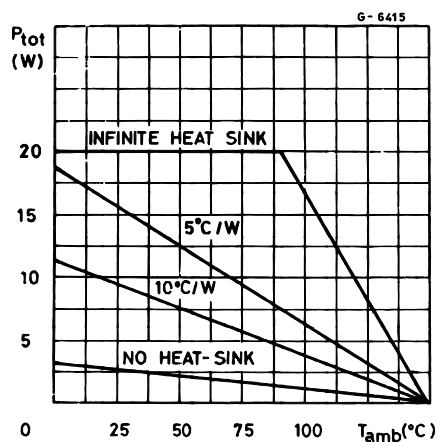


Figure 25: Total Power Dissipation

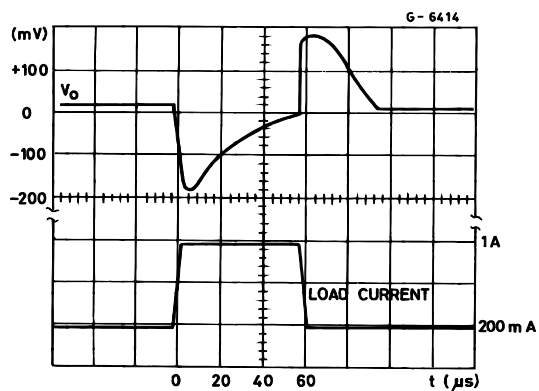


Figure 27: Distributed Supply with On-card L4940 and L4941 low drop regulator


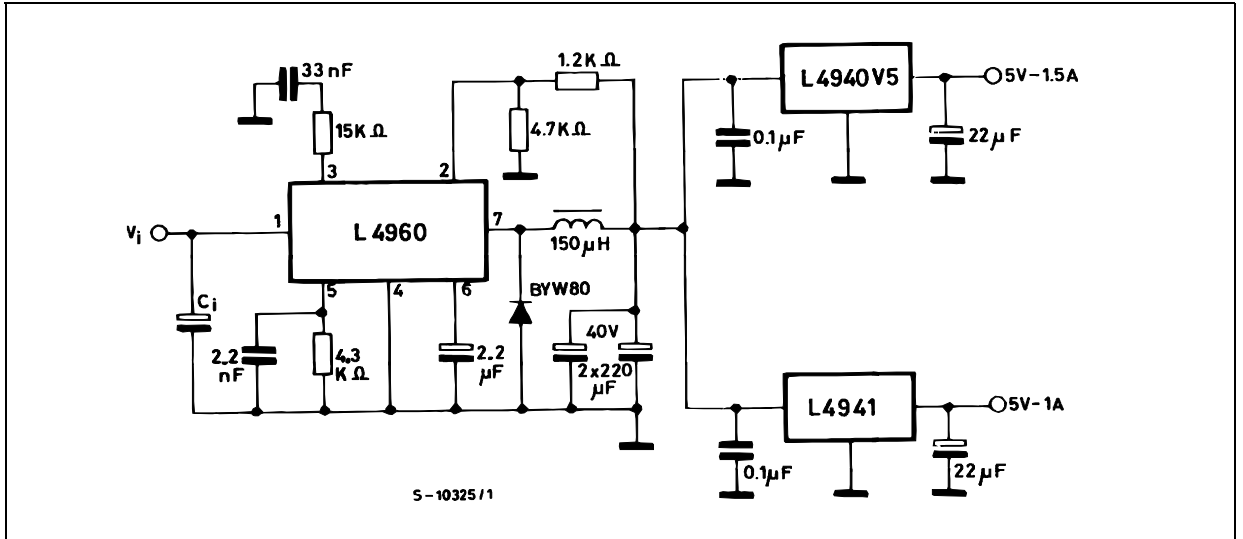



Figure 28: Distributed Supply with On-card L4940 and L4941 low drop regulator

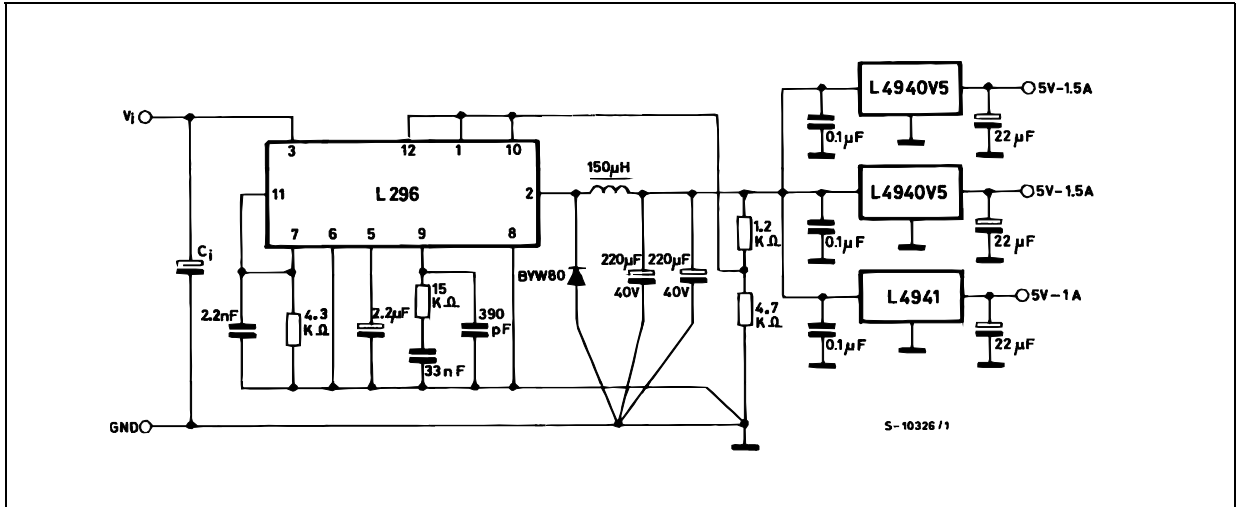

ADVANTAGES OF THESE APPLICATIONS ARE:

- On card regulation with short-circuit and thermal protection on each output.
- Very high total system efficiency due to the switching preregulation and very low-drop postregulation

Figure 29: Distributed Supply with On-card L4940 and L4941 low drop regulator

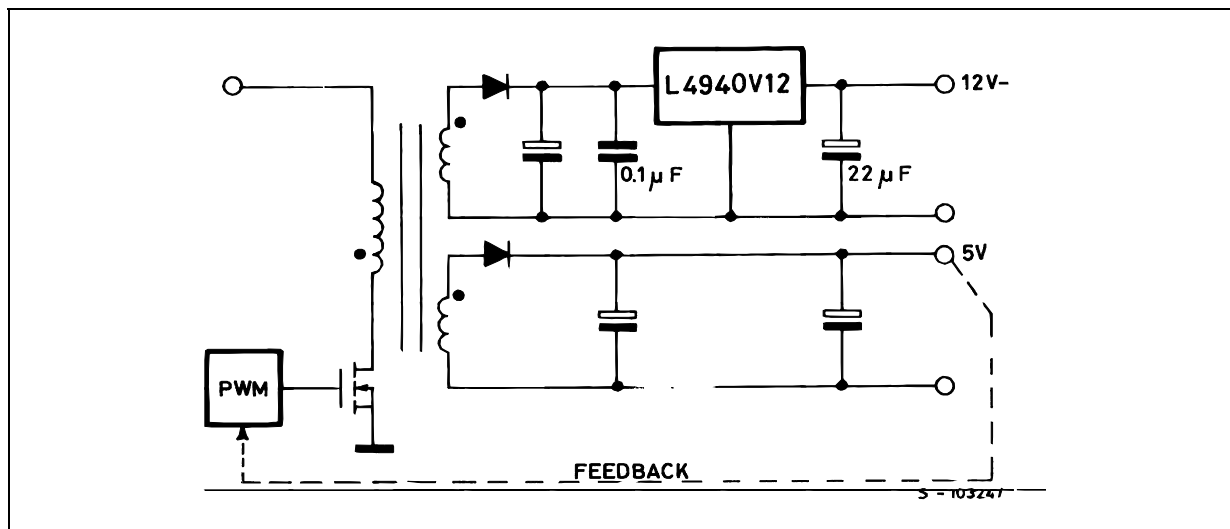


## ADVANTAGES OF THIS CONFIGURATION ARE:

- Very high regulation (line and load on both the output voltage)
- 12V output short circuit and thermally protected
- Very high efficiency on the 12 V output due to the low drop regulator


TO-220 MECHANICAL DATA

| DIM. | mm.   |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

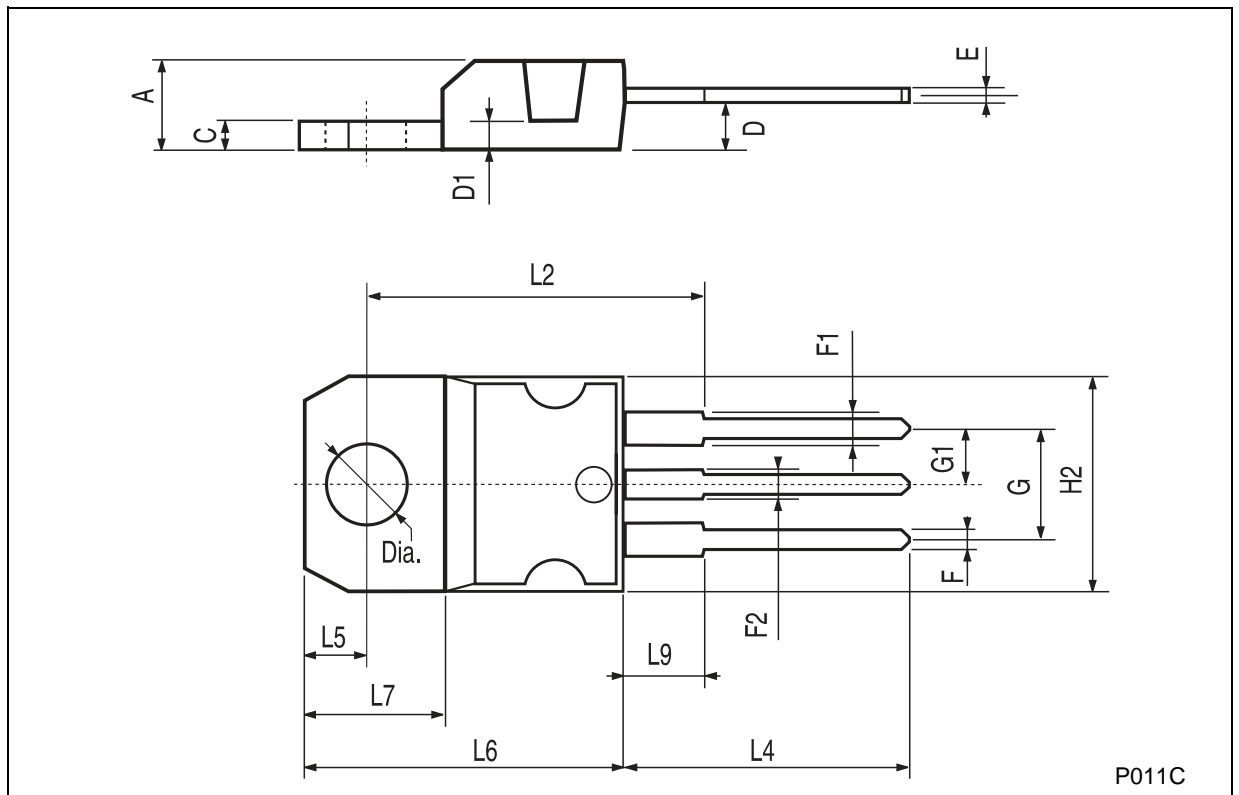

## TO-220FP MECHANICAL DATA


| DIM. | mm.  |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40 |      | 4.60  | 0.173 |       | 0.181 |
| B    | 2.5  |      | 2.7   | 0.098 |       | 0.106 |
| D    | 2.5  |      | 2.75  | 0.098 |       | 0.108 |
| E    | 0.45 |      | 0.70  | 0.017 |       | 0.027 |
| F    | 0.75 |      | 1     | 0.030 |       | 0.039 |
| F1   | 1.15 |      | 1.50  | 0.045 |       | 0.059 |
| F2   | 1.15 |      | 1.50  | 0.045 |       | 0.059 |
| G    | 4.95 |      | 5.2   | 0.194 |       | 0.204 |
| G1   | 2.4  |      | 2.7   | 0.094 |       | 0.106 |
| H    | 10.0 |      | 10.40 | 0.393 |       | 0.409 |
| L2   |      | 16   |       |       | 0.630 |       |
| L3   | 28.6 |      | 30.6  | 1.126 |       | 1.204 |
| L4   | 9.8  |      | 10.6  | 0.385 |       | 0.417 |
| L5   | 2.9  |      | 3.6   | 0.114 |       | 0.142 |
| L6   | 15.9 |      | 16.4  | 0.626 |       | 0.645 |
| L7   | 9    |      | 9.3   | 0.354 |       | 0.366 |
| DIA. | 3    |      | 3.2   | 0.118 |       | 0.126 |

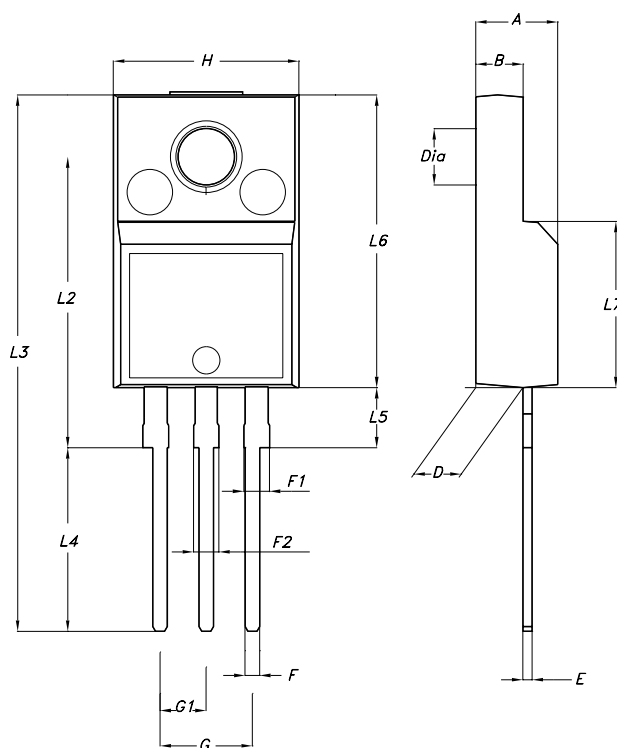

7012510A-H


**D<sup>2</sup>PAK MECHANICAL DATA**

| DIM. | mm.  |     |       | inch  |       |       |
|------|------|-----|-------|-------|-------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.4  |     | 4.6   | 0.173 |       | 0.181 |
| A1   | 2.49 |     | 2.69  | 0.098 |       | 0.106 |
| A2   | 0.03 |     | 0.23  | 0.001 |       | 0.009 |
| B    | 0.7  |     | 0.93  | 0.027 |       | 0.036 |
| B2   | 1.14 |     | 1.7   | 0.044 |       | 0.067 |
| C    | 0.45 |     | 0.6   | 0.017 |       | 0.023 |
| C2   | 1.23 |     | 1.36  | 0.048 |       | 0.053 |
| D    | 8.95 |     | 9.35  | 0.352 |       | 0.368 |
| D1   |      | 8   |       |       | 0.315 |       |
| E    | 10   |     | 10.4  | 0.393 |       | 0.409 |
| E1   |      | 8.5 |       |       | 0.335 |       |
| G    | 4.88 |     | 5.28  | 0.192 |       | 0.208 |
| L    | 15   |     | 15.85 | 0.590 |       | 0.624 |
| L2   | 1.27 |     | 1.4   | 0.050 |       | 0.055 |
| L3   | 1.4  |     | 1.75  | 0.055 |       | 0.068 |
| M    | 2.4  |     | 3.2   | 0.094 |       | 0.126 |
| R    |      | 0.4 |       |       | 0.016 |       |
| V2   | 0°   |     | 8°    | 0°    |       | 8°    |

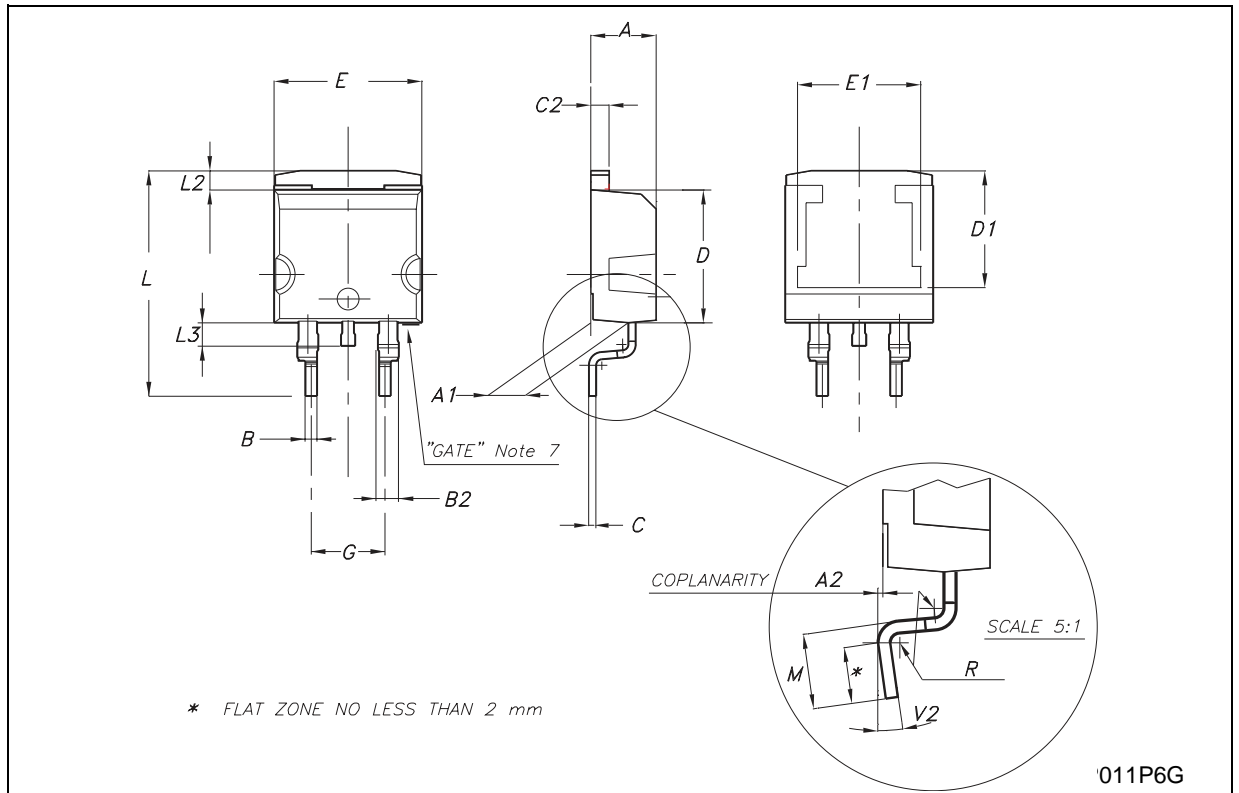

D<sup>2</sup>PAK/A MECHANICAL DATA

| DIM. | mm.  |     |       | inch  |       |       |
|------|------|-----|-------|-------|-------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40 |     | 4.60  | 0.173 |       | 0.181 |
| A1   | 2.49 |     | 2.69  | 0.098 |       | 0.106 |
| A2   | 0.03 |     | 0.23  | 0.001 |       | 0.009 |
| B    | 0.7  |     | 0.93  | 0.028 |       | 0.037 |
| B1   | 0.8  |     | 1.3   | 0.031 |       | 0.051 |
| B2   | 1.14 |     | 1.7   | 0.045 |       | 0.067 |
| C    | 0.45 |     | 0.60  | 0.018 |       | 0.024 |
| C2   | 1.23 |     | 1.36  | 0.048 |       | 0.054 |
| D    | 8.95 |     | 9.35  | 0.352 |       | 0.368 |
| D1   |      | 8   |       |       | 0.315 |       |
| E    | 10   |     | 10.4  | 0.394 |       | 0.409 |
| E1   |      | 8.5 |       |       | 0.335 |       |
| G    | 4.88 |     | 5.28  | 0.192 |       | 0.208 |
| L    | 15   |     | 15.85 | 0.591 |       | 0.624 |
| L2   | 1.27 |     | 1.4   | 0.050 |       | 0.055 |
| M    | 2.4  |     | 3.2   | 0.094 |       | 0.126 |
| R    |      | 0.4 |       |       | 0.016 |       |
| V2   | 0°   |     | 8°    | 0°    |       | 8°    |

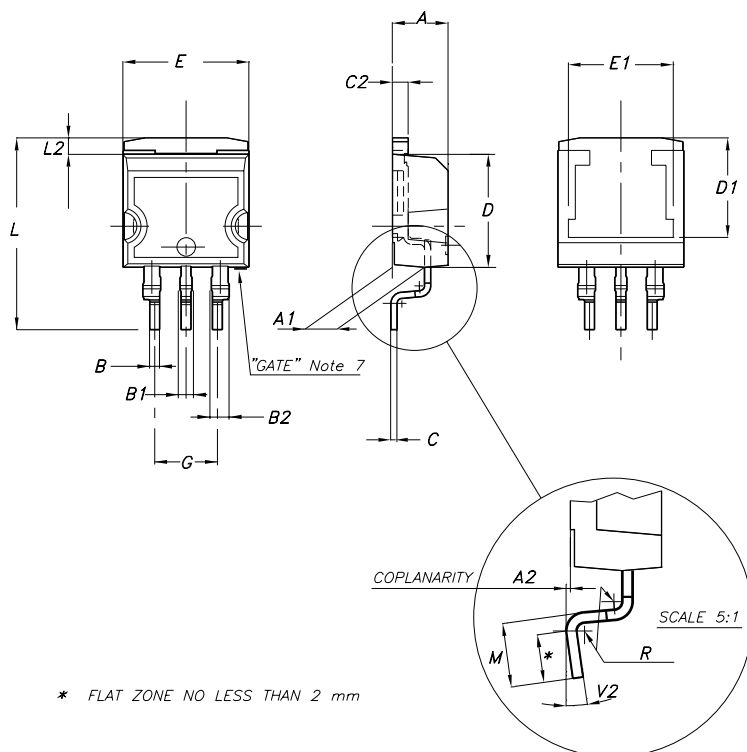

7106164/D

Tape & Reel D<sup>2</sup>PAK-P<sup>2</sup>PAK-D<sup>2</sup>PAK/A-P<sup>2</sup>PAK/A MECHANICAL DATA

| DIM. | mm.   |       |       | inch  |       |       |
|------|-------|-------|-------|-------|-------|-------|
|      | MIN.  | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |       |       | 180   |       |       | 7.086 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519 |
| D    | 20.2  |       |       | 0.795 |       |       |
| N    | 60    |       |       | 2.362 |       |       |
| T    |       |       | 14.4  |       |       | 0.567 |
| Ao   | 10.50 | 10.6  | 10.70 | 0.413 | 0.417 | 0.421 |
| Bo   | 15.70 | 15.80 | 15.90 | 0.618 | 0.622 | 0.626 |
| Ko   | 4.80  | 4.90  | 5.00  | 0.189 | 0.193 | 0.197 |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161 |
| P    | 11.9  | 12.0  | 12.1  | 0.468 | 0.472 | 0.476 |

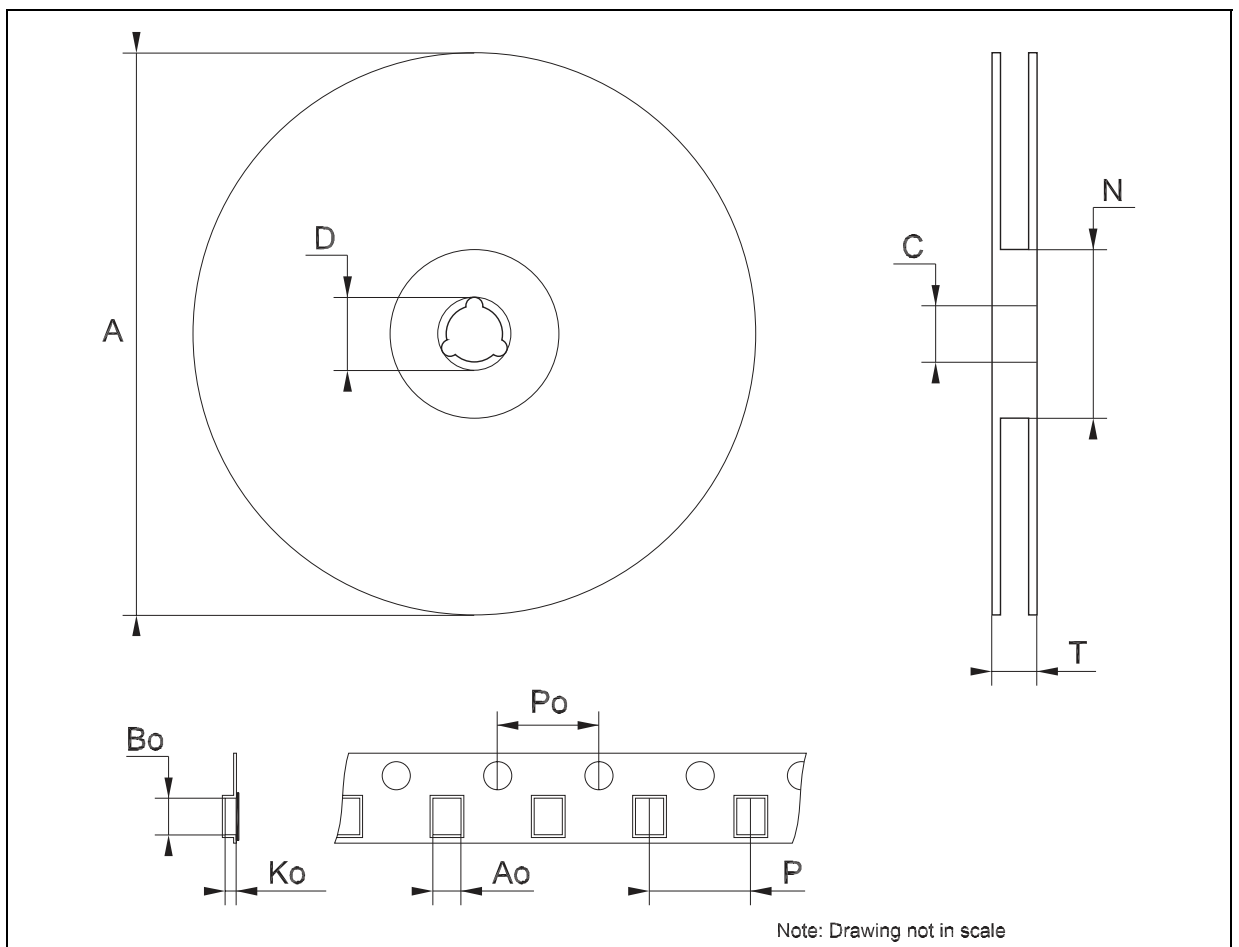




Table 8: Revision History

| Date        | Revision | Description of Changes                |
|-------------|----------|---------------------------------------|
| 04-Feb-2005 | 6        | Add new package D <sup>2</sup> PAK/A. |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)