


TABLE 1	
MODEL NUMBER	LENGTH
415-0531-MM200	200mm ±6
415-0531-MM250	250mm ±6

REV	ECO	DATE
1	INITIAL RELEASE	6/24/2021

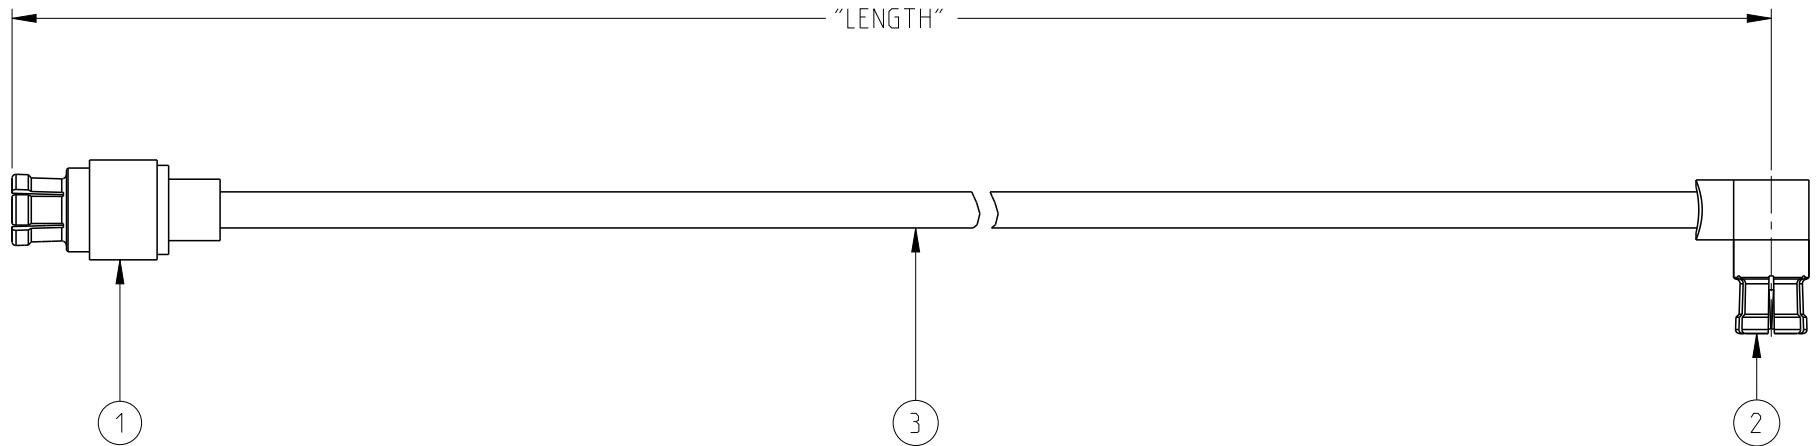

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.

PART LIST		
ITEM	QTY	DESCRIPTION
1	1	SMPM STR FEMALE
2	1	SMPM RA FEMALE
3	AR	CABLE

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No:	415-0531-MXXXX		JOHNSON		
	RoHS <input checked="" type="checkbox"/>	(EU)/2015/863 COMPLIANT	Cage Code	Title: CABLE ASSY. METRIC, SMPM STR FEMALE TO SMPM RA FEMALE, .047" SEMI-RIGID		
	UNLESS OTHERWISE SPECIFIED UNITS: INCH		3RD ANGLE PROJECTION	Drawing No.	REV.	
	.XX ± .01	.XXX ± .003	.XXXX ± .0010	ANGLE ± 2°	Drawn by: ROMAN YAO	415-0531-MXXXX 1
Date: 6/24/2021		Size A	DO NOT SCALE DRAWING	Workmanship Std	Sheet 1 OF 1	