


50	P	66.65	52.68	60.99	10.95	14.99	10.57	5.82	0.8
	S	66.65	52.30	60.99	10.62	14.99	10.64	5.05	0.8
37	P	68.94	55.30	63.37	8.23	12.17	10.57	5.82	0.8
	S	68.94	54.71	63.37	7.77	12.17	10.64	5.05	0.8
25	P	52.65	38.84	46.91	8.23	12.17	10.57	5.69	0.8
	S	52.65	38.25	46.91	7.77	12.17	10.64	5.05	0.8
15	P	38.76	25.12	33.20	8.23	12.17	10.46	5.69	0.8
	S	38.76	24.79	33.20	7.77	12.17	10.64	5.05	0.8
09	P	30.43	16.79	24.87	8.23	12.17	10.46	5.69	0.8
	S	30.43	16.21	24.87	7.77	12.17	10.64	5.05	0.8
SHELL SIZE	A-0	+0.76	+1.25	+0.25	+0.26	+0.76	+0.51	+1.25	+0.22
	B-0								
	C-0								
	D-0								
	E-0								
	F-0								
	G-0								
	H-0								

NOTE:-INSIDE DIMENSIONS OF MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR.

TECHNICAL SPECIFICATIONS

- SHELLS : CADMIUM PLATED STEEL
- INSULATOR MATERIAL : SELF EXTINGUISHING THERMOPLASTIC- TO UL CLASS 94 V0
- CONTACTS DIA ON ACTIVE AREA : Ø1 MM.
- CONTACTS MATERIAL : COPPER ALLOY
- CONTACT PLATING : GOLD OVER NICKEL
- OPERATING TEMPERATURE : -55°C +125°C
- OPERATING CURRENT : 7.5 A PER CONTACT
- CONTACT RESISTANCE : ≤7.3mΩ
- INSULATION RESISTANCE : ≥5000 MΩ
- MAXIMUM VOLTAGE : 1000 V.r.m.s
- MECHANICAL ENDURANCE : 500 MATINGS
- DAMP HEAT : 56 DAYS

ORDERING INFORMATION

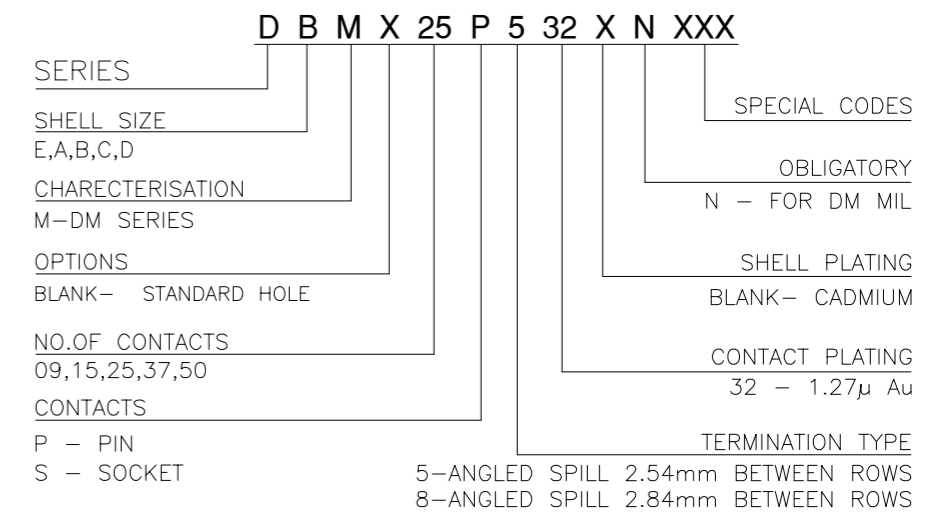

mat'l. code	surface	tolerance	projection	product family
SEE NOTES	ISO 1302 ✓	ISO 406 ISO 1101		D-SUB
ltr	ecn no	dr	date	title
L	ELX-I-38410	GM	18-09-2020	D-SUB DM A/S CONNECTOR
				(DM SERIES WITH 10.3 MM FOOT PRINT)
	angles	linear	scale 1:1	dwg no
	0°±1'	.00±0.1	mm	sheet 1 of 1 size
	dr	GREGAR M	17-09-2020	C-DSUB-0122
	enr	GREGAR M	18-09-2020	A3
	chr	SREERAJ K R	18-09-2020	Product Customer Drawing
	appd	SANOJ P K	18-09-2020	
sheet index	revision	L		
	sheet	1		