


**Description**: On-ground BLE/NFC combo

**PART NUMBER: W5100** 

**Series: Embedded Antenna** 

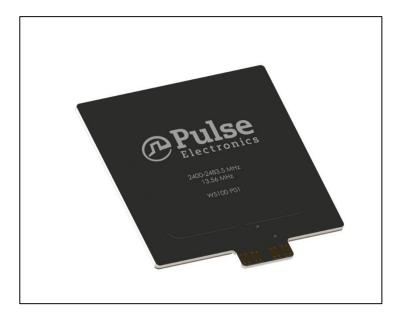

# **Features:**

- Own feed ports for 2.4GHz and NFC 13.56MHz
- Ultra thin 1.2mm
- Surface area 40x40mm
- Operates on top of metal ground plane
- Mounting with adhesive tape

# [0.05] 40 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.05] 1,20 [0.07]


# **Applications:**

- Devices using 2.4GHz radios and 13.56MHz NFC connectivity
- BLE, Bluetooth, Zigbee, ISM 2.4GHz
- · Pairing, sharing

All dimensions are in mm / inches

Issue: 1613

In the effort to improve our products, we reserve the right to make changes judged to be necessary.  $\texttt{CONFIDENTIAL} \ \texttt{AND} \ \texttt{PROPRIETARY} \ \texttt{INFORMATION}$ 



Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 3611 NE 112<sup>th</sup> Ave Vancouver, WA 98682 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description**: On-ground BLE/NFC combo

**Series: Embedded Antenna** 

PART NUMBER: W5100

ΓRICAL	CDEC		
I BIL, AI	SPELI	ICIL.A	111111

Frequency P1	2400-2483.5 MHz
1 ICAUCITO I I	

Frequency P2 13.56 MHz

P1 nominal Impedance  $50\Omega$ 

P1 VSWR <3:1

P1 Gain in free space -1dBi

P1 Gain over metal plate 1dBi

P2 Inductance in free space 0.95μH

P2 Q-value in free space 44

P2 Self Resonant Frequency in free space 65.9MHz

P2 Inductance over metal plate 0.92μH

P2 Q-value over metal plate 33

P2 Self Resonant Frequency over metal plate 63.9MHz

Connector type Contact pads



**Description**: On-ground BLE/NFC combo

**Series: Embedded Antenna** 

PART NUMBER: W5100

# **MECHANICAL SPECIFICATIONS**

Color Black

Weight 4.6 g

Fixing system Pressure sensitive

adhesive

#### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature -40 to 85°C

Storage temperature MIL STD 810G: 24h at

85°C and 24h at -40°C

Temperature shock MIL STD 810G: Method

503.5, -40 for 1 hr to +85

C for 1 hr @ 15

deg.C/min rate of change;

3 cycles

Humidity MIL STD 810G: 24h at

60°C and 95%RH

Drop test Top, bottom, side. 3

times/orientation, 40"




**Description**: On-ground BLE/NFC combo

**Series: Embedded Antenna** 

**PART NUMBER: W5100** 

# **MECHANICAL DRAWING**

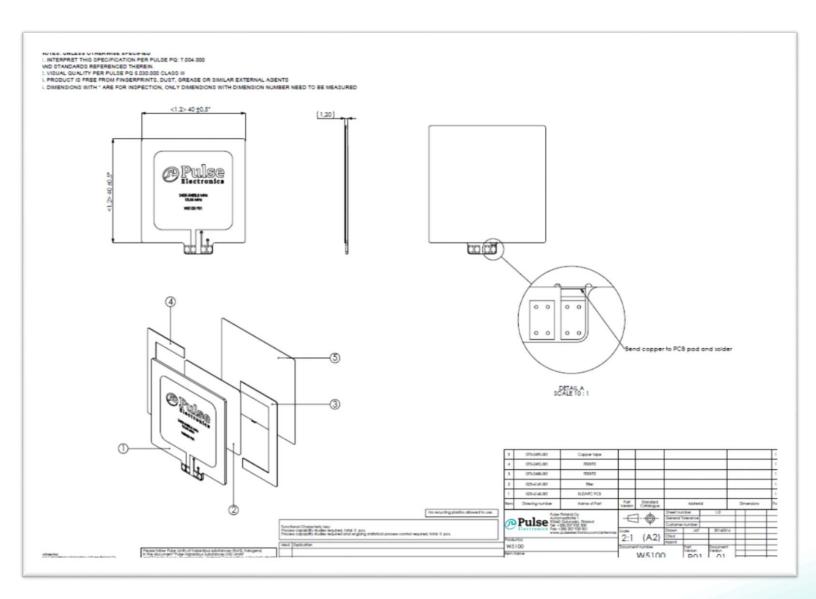



**Description**: On-ground BLE/NFC combo

**Series: Embedded Antenna** 

PART NUMBER: W5100

# **OTHER SPECIFICATIONS**

Test setup over metal (80x80mm2). Material Ni plated steel Antenna contact points shown for BLE(P1) and NFC (P2)






**Description**: On-ground BLE/NFC combo


**Series: Embedded Antenna** 

**PART NUMBER: W5100** 

# **CHARTS**

P1

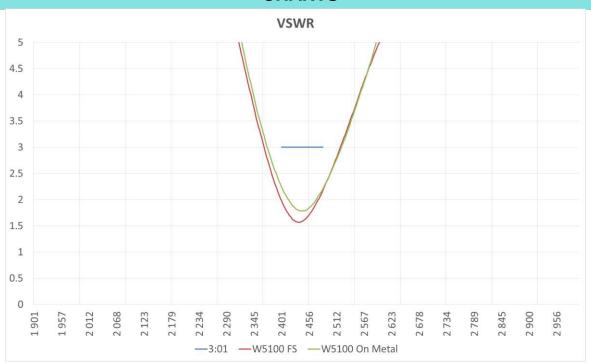

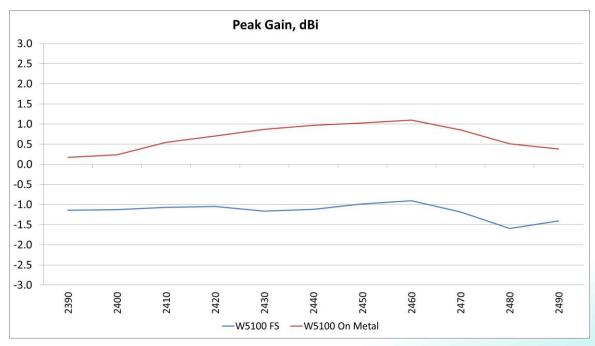

Issue: 1613



**Description**: On-ground BLE/NFC combo


Series: Embedded Antenna

**PART NUMBER: W5100** 


# **CHARTS**

### Vertical plane

P1

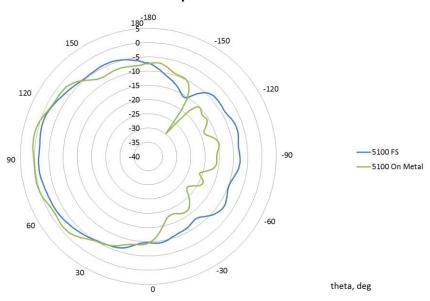

#### Horizontal plane

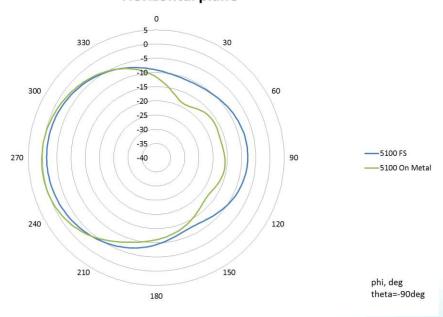




**Description**: On-ground BLE/NFC combo


**Series: Embedded Antenna** 

**PART NUMBER: W5100** 

# **CHARTS**

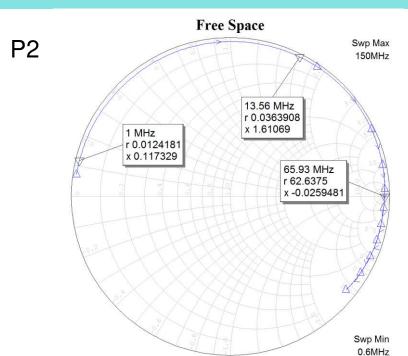

L @13.56MHz, μH	0.95
Q @13.56MHz	44
SRF, MHz	65.9

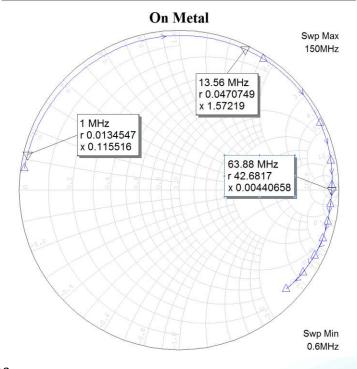

L @13.56MHz, μH	0.92
Q @13.56MHz	33
SRF, MHz	63.9

Issue: 1613



**Description**: On-ground BLE/NFC combo

**Series: Embedded Antenna** 

PART NUMBER: W5100

# **PACKAGING**

Sealed plastic bag 60x90mm

# **ASSEMBLY**

Pull off adhesive cover from backside and attach. Apply pressure 10N/cm² for 4 seconds to activate pressure sensitive adhesive.

