


寸法公差は ±0.20
(TOLERANCE : ±0.2)
パネル取付穴
(DIMENSION OF PANEL)

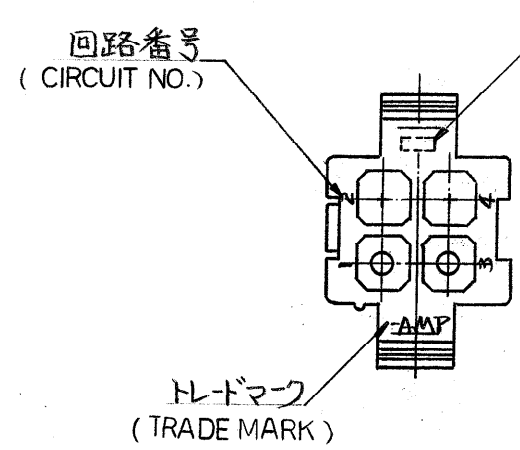

- NOTES:
1. APPLIED CONTACT P/N : 170359, 170360, 170361, 170362.
 2. MATING CONN ; PLUG HOUSING P/N 172338.
 - ③ PANEL THICKNESS ; 0.8~2.0 mm
 4. PRESS DIRECTION OF PANEL MUST BE SAME AS HOUSING INSERTED DIRECTION.
 5. INSTRUCTION SHEET ; IS-105J
 6. PRODUCT SPEC : 108-5151.
 - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 注:
1. 使用端子型番は 170359, 170360, 170361, 170362
 2. 嵌合相手ハウジング型番は 172338
 - ③ 適用パネル厚 0.8~2.0 mm.
 4. 取付穴打抜方向とハウジングの挿入方向は同じである。
 5. 取扱説明書 : IS-105J
 6. 通用製品仕様書: 108-5151

△ OBSOLETE	黄 (YELLOW)	1- 172330 -4
	黒 (BLACK)	1- -9
	青 (BLUE)	1- -6
	緑 (GREEN)	1- -5
	赤 (RED)	1- -2
	自然色 (NATURAL) 色 (COLOR)	172330 -1 型番 (P/N)

材料 (MATERIAL) 6/6 ナイロン (UL94V-2) (NYLON 6/6 UL94V-2)		一般公差 TOLERANCE ±0.3 EXCEPT ±1° AS NOTED			
仕上 (FINISH) 色: 表参照 HOUSING COLOR : SEE TABLE		DR. <i>R. Yuasa 4/20 21</i> CHK. <i>St. Tompa 4/21 21</i> DE. <i>St. Tompa 4/21 21</i> APP.		名称 (NAME) MINI-UNIVERSAL MATE-N-LOK CONN. CAP HOUSING 4 Pos. (UL94V-2) 4極ミニユニバーサルメイトンロックコネクタ キャップハウジング (UL94V-2)	
		SIZE B	LOC J	番号 (NO.) C-172330	
		尺度 (SCALE) 2 : 1	REV. A4	SHEET -#-	

PRINT DIST 単位: 概 DIMENSIONS IN MM DO NOT SCALE PRINT

A4	REVISED PER ECR-16-010553	BW	SG	03AUG2017
LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE