


Date	SYM	REVISION RECORD	AUTH	DR.	СК.
11/15/03	А	MATERIAL CHANGED TO POLYPROPYLENE	T.B.	B.S.	
6/12/09	В	ADDED "ROHS COMPLLIANT"	T.B.	B.S.	
9/05/14	С	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

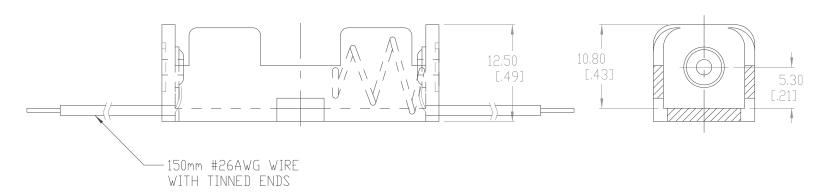

## SPECIFICATION:

## 1. MATERIAL:

HOUSING: BLACK POLYPROPYLENE

FLAMMABILITY RATING -UL94-HB, UL FILE NO. E56070(S)

TEMPERATURE RANGE: -10°C to +100°C

WIRES: 26AWG, UL1007, CSA TR-64, 300V, 80°C

SPRING: SPRING STEEL, NICKEL PLATED.

CONTACT RESISTANCE: UNDER  $50m\Omega$  FOR +/- CONTACTS PER

EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Inches)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735						
Decimal	200	Broud Hottow Rou	Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional ± .8 (.030)	Title 23A BATTERY HOLDER WITH WIRE LEADS						
Angular ± 3°	Date 9/05/14	Drawing Nu Bl	mber H23AW				