

### OEG Miniature Relay PCF

TE Internal #: 1955491-1 RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, OEG Miniature Relay PCF

View on TE.com >

Connectors > Modular Jacks & Plugs > RJ45 Connectors

Modular Jack & Plug Interface Type: **RJ45** 

Port Configuration: Single Port

Port Matrix Configuration: 1 x 1

Modular Jacks & Plugs Products: RJ Type Jacks & Plugs

Connector Contact Density: Standard

### Features

#### **Product Type Features**

Connector Product Type	Connector Assembly	
Modular Jack & Plug Interface Type	RJ45	
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs	
Modular Connector Style	Jack	
Grounding Options	PCB and Panel Ground	



### Printed Circuit Board

### **Configuration Features**

Status Indicator Type	None	
Number of PCB Ground Tabs	4	
Port Configuration	Single Port	
Port Matrix Configuration	1 x 1	
Connector Contact Density	Standard	
Number of Positions	8	
Number of Loaded Positions	8	
PCB Mount Orientation	Right Angle	
Body Features		
Shield Plating Material	Tin	
Shield Material	Brass	
Modular Jack Latch Orientation	Inverted - Latch Up	
Connector Profile	Standard	

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, OEG Miniature Relay PCF



### **Contact Features**

Contact Underplating Material	Nickel		
PCB Contact Termination Area Plating Material	Tin		
Contact Current Rating (Max)	1.5 A		
Contact Mating Area Plating Material	Gold		
Contact Base Material	Phosphor Bronze		
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]		
Termination Features			
Termination Method to Printed Circuit Board	Through Hole - Solder		
Mechanical Attachment			
Panel Mount Feature	Without		
Connector Mounting Type	Panel Mount		
Housing Features			
Mating Entry Location	Side		
Centerline (Pitch)	1.02 mm[.04 in]		
Housing Color	Black		
	High Temperature Thermoplastic		

### Dimensions

Connector Height	13.35 mm[.525 in]	
Usage Conditions		
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		
Shielded	Yes	
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Performance Category	Cat 3	
Packaging Features		
Packaging Quantity	180	
Packaging Method	Tape & Reel	

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, OEG Miniature Relay PCF



### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

TE Part # 188729-1

8P.COVER/SOLD.STOP

# Also in the Series | OEG Miniature Relay PCF


RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, OEG Miniature Relay PCF



Coax Connectors(1)	Combo Jacks(1)	IDC D-Sub Connectors(1)	Mini PCI Express & mSATA(1)
RJ14 Connectors(2)	RJ22 Connectors(1)	RJ25 Connectors(8)	RJ45 Connectors(69)



# Customers Also Bought

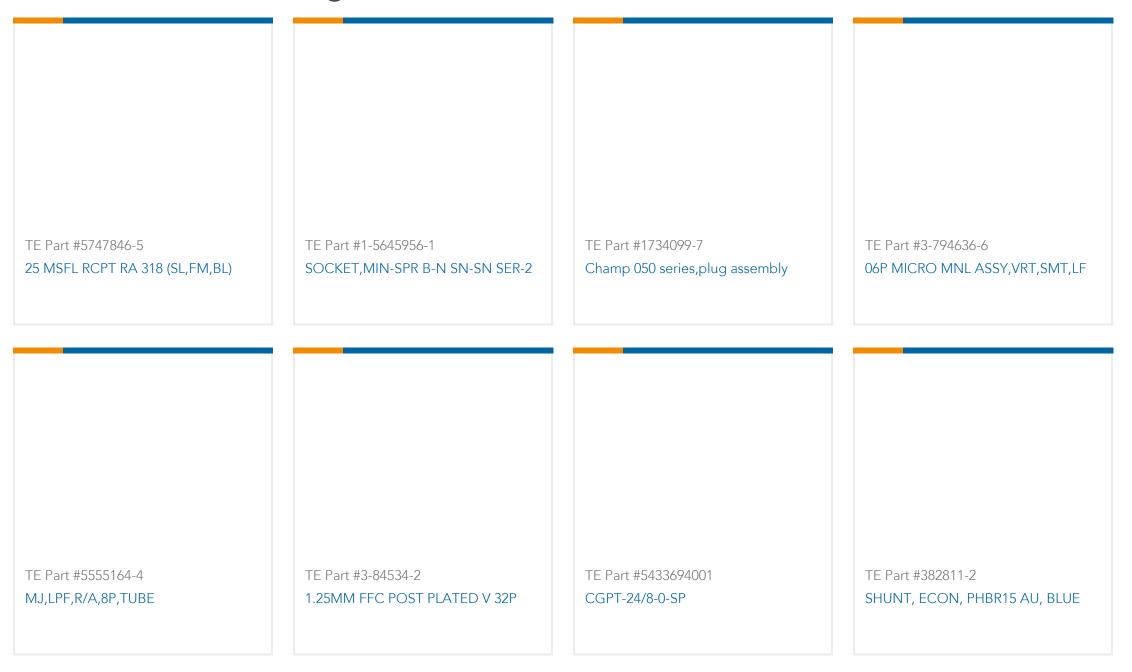

## Documents

**C** For support call+1 800 522 6752

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, OEG Miniature Relay PCF



# Product Drawings

### MJ,RJ45,SMT,SHLD,THRU HOLE SHIELD TABS

English

## **CAD** Files

Customer View Model ENG\_CVM\_CVM\_1955491-1\_A.2d\_dxf.zip

English

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1955491-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1955491-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance TE Material Declaration

English