
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPECIFICATIONS

-		
PARAMETERS	VALUES	UNITS
RATED INPUT POWER	NPUT POWER 0.5	
MAX INPUT POWER	W	
IMPEDANCE	50±15%	ОНМ
OUTPUT SPL @ 0.1W/0.1M (AT 1.0, 1.2, 1.5 kHz)	92±3	dBA
DISTORTION (MAX.)	5%	-
RESONANT FREQUENCY	950±20%	Hz
FREQUENCY RANGE	950 ~ 7000	Hz
HOUSING MATERIAL	METAL	-
CONE MATERIAL	MYLAR	_
MAGNET MATERIAL	NdFeB	_
OPERATING TEMPERATURE	ERATING TEMPERATURE $-20 \sim +60$	
WEIGHT	12	grams

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	2/16/10	

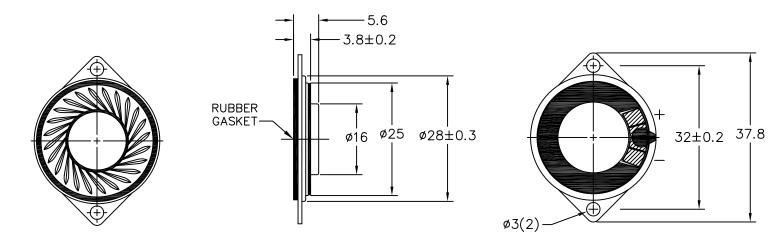

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

AS02850MR-R.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3".

APPROVALS		DATE	
DRAWN	B.R.	2/10	┝
CHECKED	C. W.	2/10	
APPROVED	B.R.	2/10	S

6300 Sand Lake Road Dayton, Ohio 45414

APPRO	OVALS	DATE	SPEAKER			٦				
RAWN	B.R.	2/10	JI LANLIN							
	Δ.Κ.	2/10	SIZE DRAWING NO.					٦		
CHECKED	C. W.	2/10	Δ							
	C. 77.	2/10	A 1 7,502,500 MIX TX							
APPROVED	B.R.	2/10	SCALE	E: N.T.S.		SHEET	1	OF	1	
										_