
| Date     | SYM | REVISION RECORD                | AUTH | DR.  | CK. |
|----------|-----|--------------------------------|------|------|-----|
| 02/10/12 | Α   | UPDATED NOTES                  | T.B. | B.S. |     |
| 6/14/13  | В   | WIRE GAUGE WAS 24AWG           | T.B. | B.S. |     |
| 12/05/14 | С   | UPDATED TO ROHS 2<br>COMPLIANT | T.B. | B.S. |     |
| 09/18/15 | D   | ADDED DIM. 10.90               | T.B. | B.S. |     |
|          |     |                                |      |      |     |

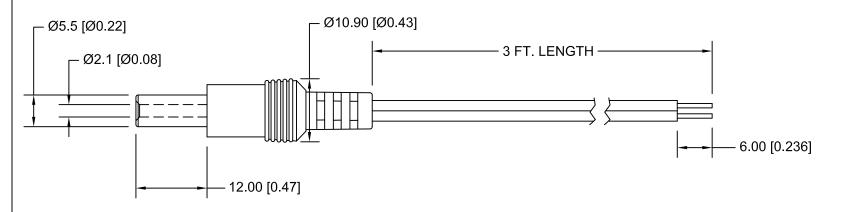

## NOTES:

HOUSING: BLACK

CORD: UL2468, 300V, 80°C, 22AWG,

BLACK WIRE WITH WHITE TRACE TO CENTER

PASSES UL FLAME TEST VW-1 CENTER IS POSITIVE CONTACT DC MOLDED PLUG: 2.1mm X 5.5mm

**ROHS 2 COMPLIANT** 

| Tolerance         | MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 |                |       |                  |  |  |  |
|-------------------|---|----------------|-------|------------------|--|--|--|
| (Except as noted) |   |                |       |                  |  |  |  |
| decimal           |   |                | Scale | Drawn By B.S.    |  |  |  |
| ±.5 (.020)        |   |                |       | Approved By T.B. |  |  |  |
| Fractional        | Title   |                |       |                  |  |  |  |
| ± .8 (.030)       | 2.1mm DC MOLDED PLUG WITH 3' WIRE LEADS   |                |       |                  |  |  |  |
| Angular           | Date  | Drawing Number |       |                  |  |  |  |
| ± 3°              | 09/18/15  | 172-4204       |       |                  |  |  |  |