


PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57[.062]

- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 5 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- 6 MARKING ON THIS SIDE.

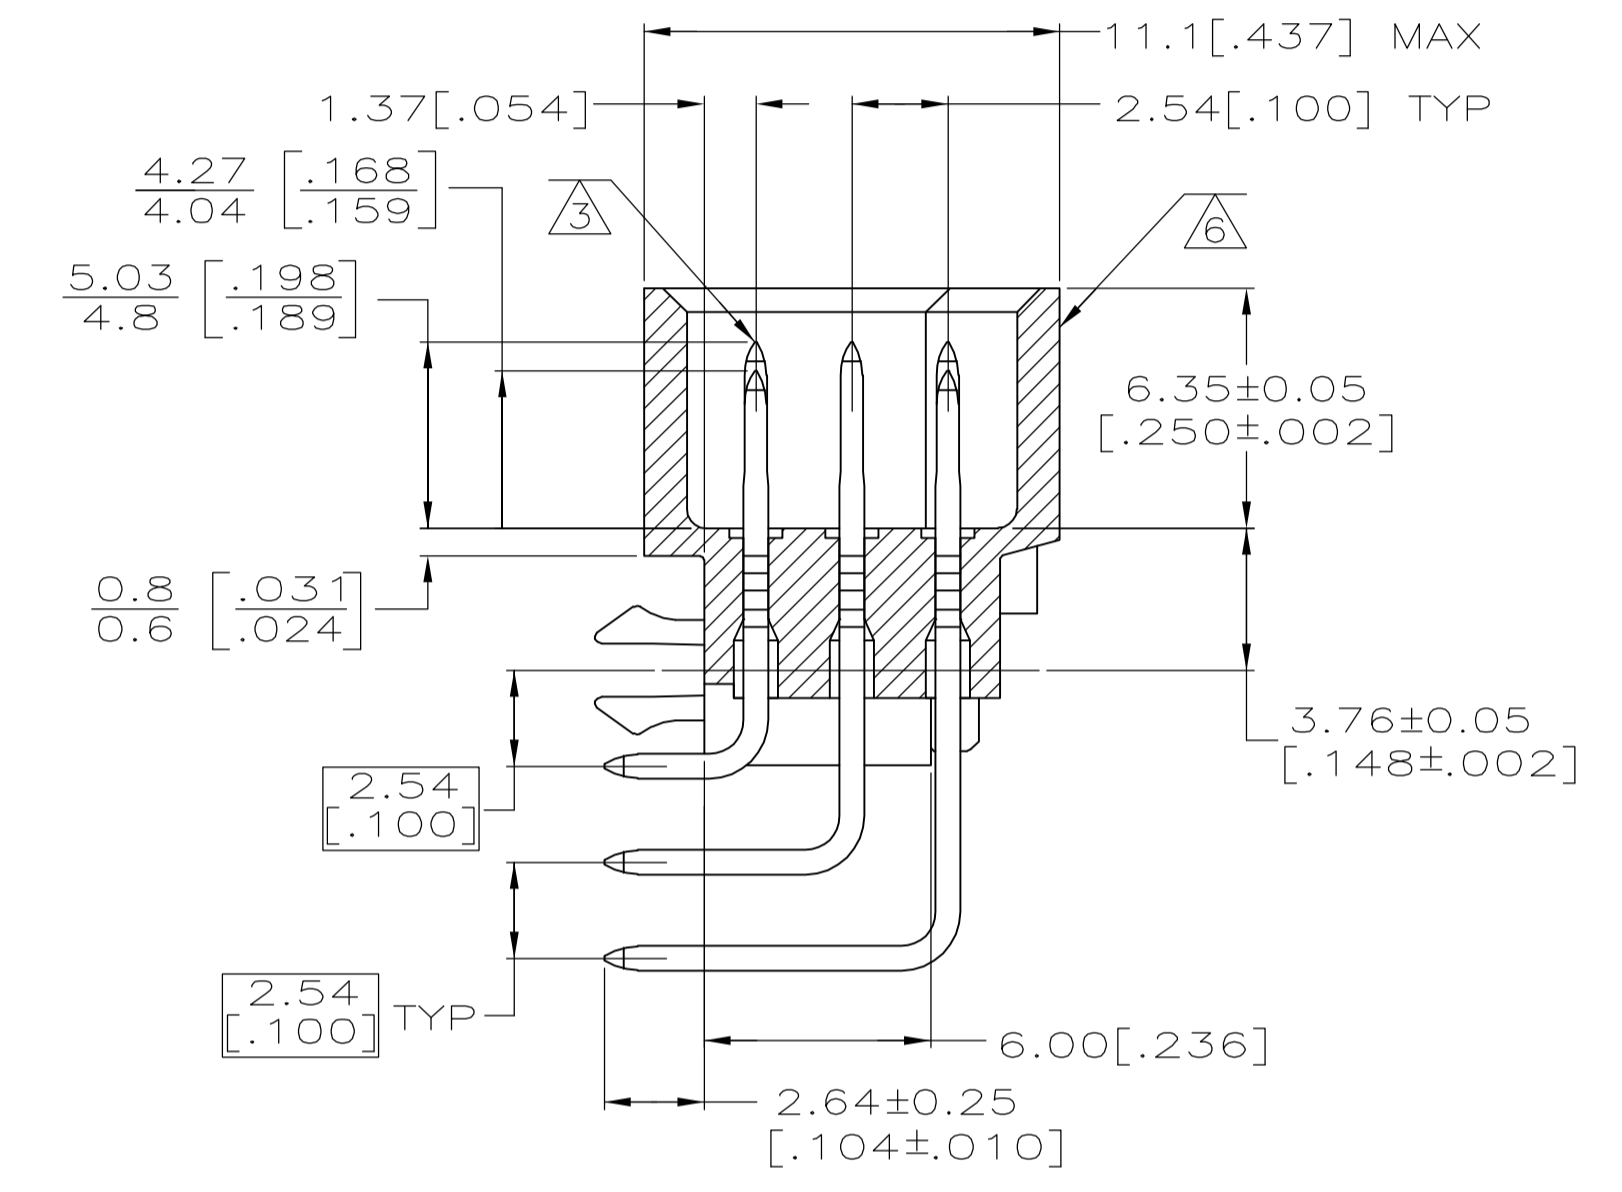

SECTION Z-Z

NONE	1-16	C	16	5536751-7
1,16	2-15	B	16	
NONE	1-16	A	16	5536751-4
12,15	1-11,13,14,16	C	16	
2,10,16	1,3-9,11-15	B	16	
1,5,13	2-4,6-12,14-16	A	16	
POSITIONS LOADED WITH 4.93[.194] CONTACTS	POSITIONS LOADED WITH 4.16[.164] CONTACTS	ROWS	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	DSMAYOS	Tyco Electronics Corporation Harrisburg, PA 17105-3608
0 PLC ± -	1 PLC ± -	CHK A. SHARPE	DSMAYOS	
2 PLC ± 0.13[.005]	3 PLC ± -	APVD A. SHARPE	NAME	ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64[.104] SOLDER POST, WITH MFBL CONTACTS AND BOARD-LOCKS
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE	SCALE 5:1
MATERIAL	FINISH	WEIGHT	CAGE CODE	SHEET 1 OF 1
			A1 00779	REV 01

CUSTOMER DRAWING