
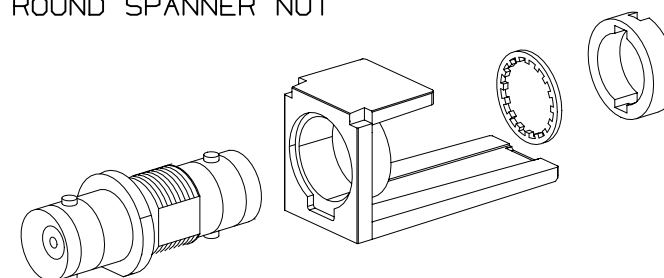
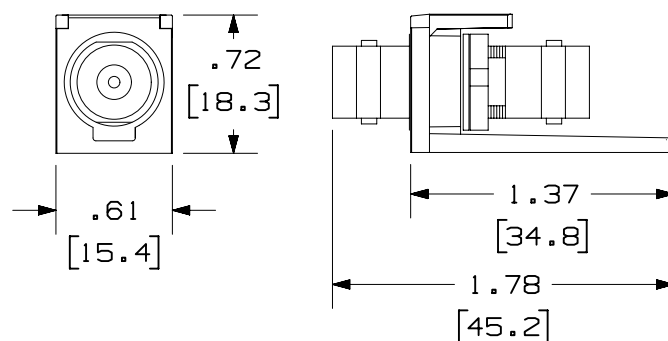


3.58 LB/100 PCS (1629g/100 PCS)

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN [] ARE IN METRIC.
4. FOR FREQUENCY RANGE FROM 10-250MHz, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.

- 1- MODULE BASE
- 1- 75ohm BNC COUPLER (ASSEMBLED TO
MODULE BASE)
- 1- LOCK WASHER
- 1- ROUND SPANNER NUT



PART NUMBER		CMBA75***Y	
TITLE			
MINI-COM 75 OHM BNC COUPLER			
CUSTOMER DRAWING			
ITEM REVISION NAME			
M02479GW/01			
DATASET FILE NAME		PANDUIT	
M02479GW_DC181/01A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .xxx ± .010 [.3] .xx ± .03 [.8] 		MATERIAL : COUPLER BODY- NICKEL PLATED COUPLER INSULATOR- PLASTIC COUPLER CONTACT- GOLD PLATED MODULE BASE- PLASTIC	
THIRD ANGLE PROJECTION		DRAWING NUMBER: 02479-181	
DRAWN BY	DATE	CHK	SCALE
JSP	4-26-06	MJD	NONE
			SIZE
SHT 1 OF 1			A

A

A

D10100DA/14