


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-13	NEMA 5-15P	1	white overmold
2	TLY-28	IEC320 C5	1	white overmold
3	30-00245	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC, white	1	
4	Label	Adhesive flag, 15x100 mm	1	white with black font

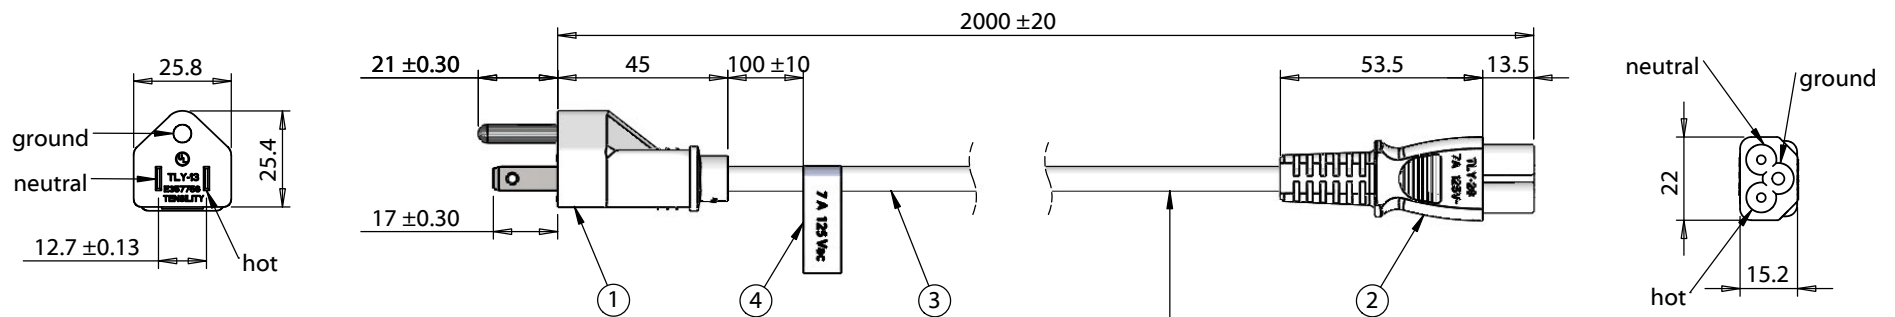

Wire marking: (UL) E339575 SVT 3X0.824mm2
 (18AWG) 105C 300V VW-1 C(UL) SVT 3X0.824mm2
 (18AWG) 105C 300V VW-1 TENSILITY HLE

Wiring Diagram		
TLY-13	wire color	TLY-28
hot	black	hot
neutral	white	neutral
ground	green	ground

Notes:
 Electrical requirements: 7 A at 125 Vac

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/20/2013	Initial release	GL <small>Digitally signed by GL Date: 2019.06.20 16:51:57 -07'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	
			AW <small>Digitally signed by AW Date: 2019.06.20 17:00:37 -07'00'</small>	Description:	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Ac cord, 2000 mm, U.S, NEMA 5-15P plug, TLY-13 to C5, TLY-28, 18 AWG, SVT wire, 30-00245, white	Size: A Part number: 11-00058
					Scale: 1:2
					Sheet 1 of 1