
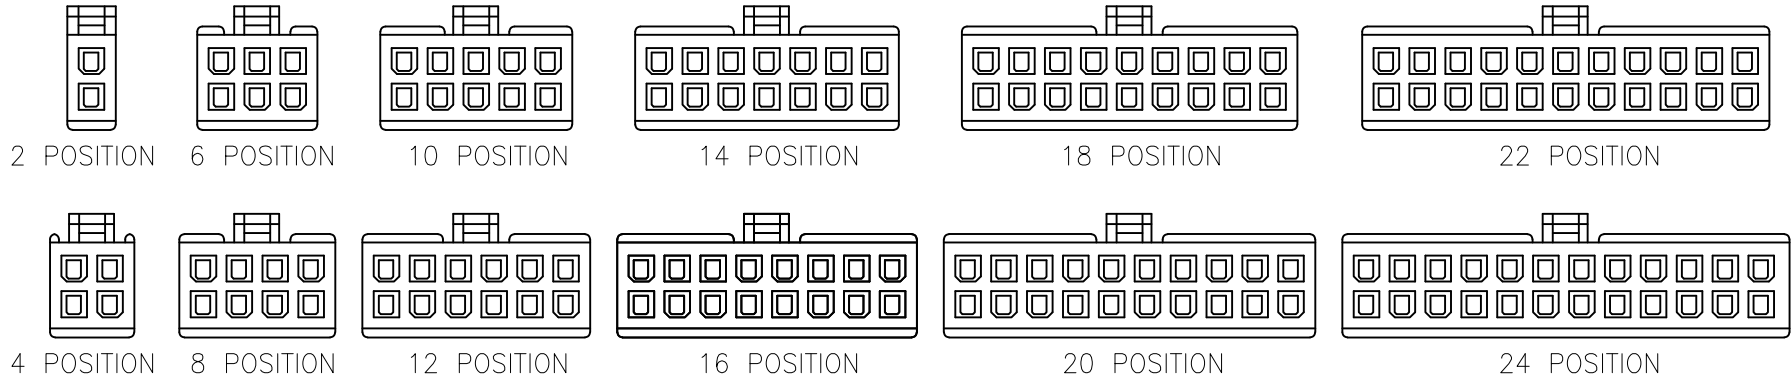
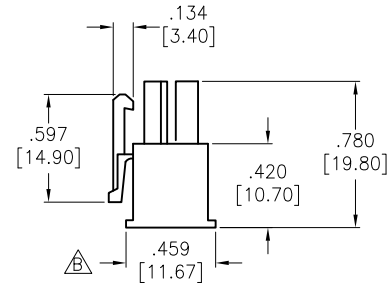
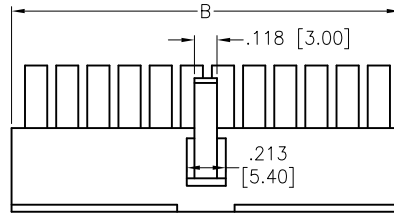


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/06	
A		REDRAWN	10/17/11	
B		ADDED DIM.	10/21/20	AY/NP

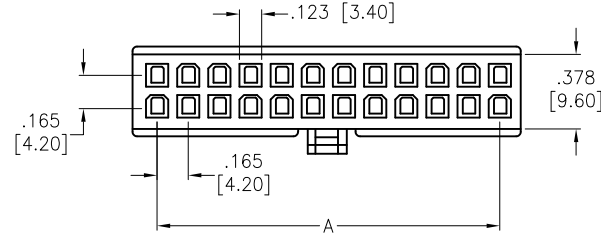

Positions: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24  
 A = .165 [4.20] X No. of Spaces per row  
 B = .165 [4.20] X No. of Positions per row + .055 [1.40]

**SPECIFICATIONS:**

Material:  
 Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: Natural  
 Electrical:  
 Operating voltage: 600 VAC max  
 Current rating: / Circuit (See Chart)  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.

WIRE SIZE	CIRCUITS			
	2	4~6	8~10	12~24
18	9 A	8 A	7 A	6 A
20	7 A	6 A	5 A	5 A
22	5 A	4 A	4 A	4 A
24	4 A	3 A	3 A	3 A



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X ± .10	Ø.X ± .10		
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS		DATE	
DRAWN	SS	8/18/06	
CHECKED			
APPROVED			

909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

**ADAM TECH**

TITLE: WIRE TO WIRE CONNECTOR HOUSING  
 FEMALE, 4.2MM PITCH

SIZE X	PART NO. DMH-XX	REV. B
REF: S00123T	SCALE: NTS	SHEET 1 OF 1