
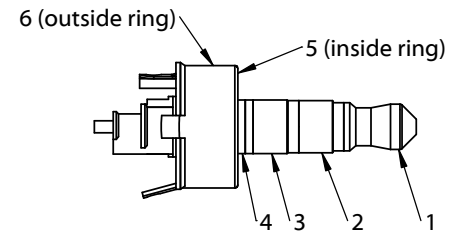
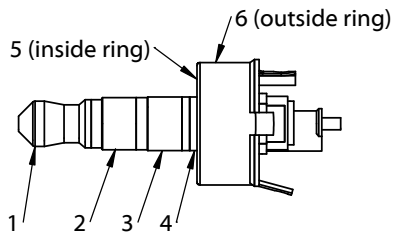


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00009	Connector, 3.5xL21.3 mm, 6C audio plug with double metal rings, brass gold plated	2	
2	30-00461	Wire, 6C TS, 26 AWG, 30V, 80C, 4.5 mm, shielded, TPE, 70A	1	
3	24-00104	Overmold, PVC, black	2	

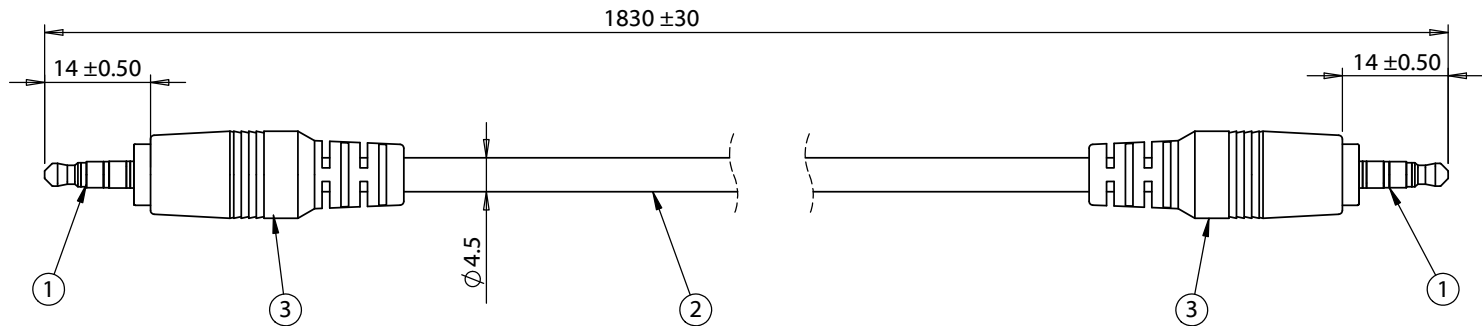

Wiring diagram		
50-00009	Wire Color	50-00009
1	Red	1
2	Black	2
3	Yellow	3
4	White	4
5	Green	5
6	Blue	6

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	1/19/2009	Initial release	PS	RoHS compliant			
A1	5/11/2009	added 50-00009 to specification	VERIFIED: LA	Function test: no open, no reversed polarity, no short circuit, no INT			
A2	8/30/2011	updated description and connector information		Functionally equivalent components may be used			
A3	5/6/2014	updated description		Drawing in third angle projected			
A4	1/9/2015	updated wire to TPE 30-00461		DESCRIPTION: Cable, 1830 mm, 6C 3.5mm 50-00009 plug with ring to same, 26 AWG, shielded, TPE 30-00461	SIZE A	PART NUMBER 053-0116R (CA-356CS-MM)	
A5	10/27/2015	corrected overall length			SCALE: 1:1		SHEET 1 OF 1