Unit : mm

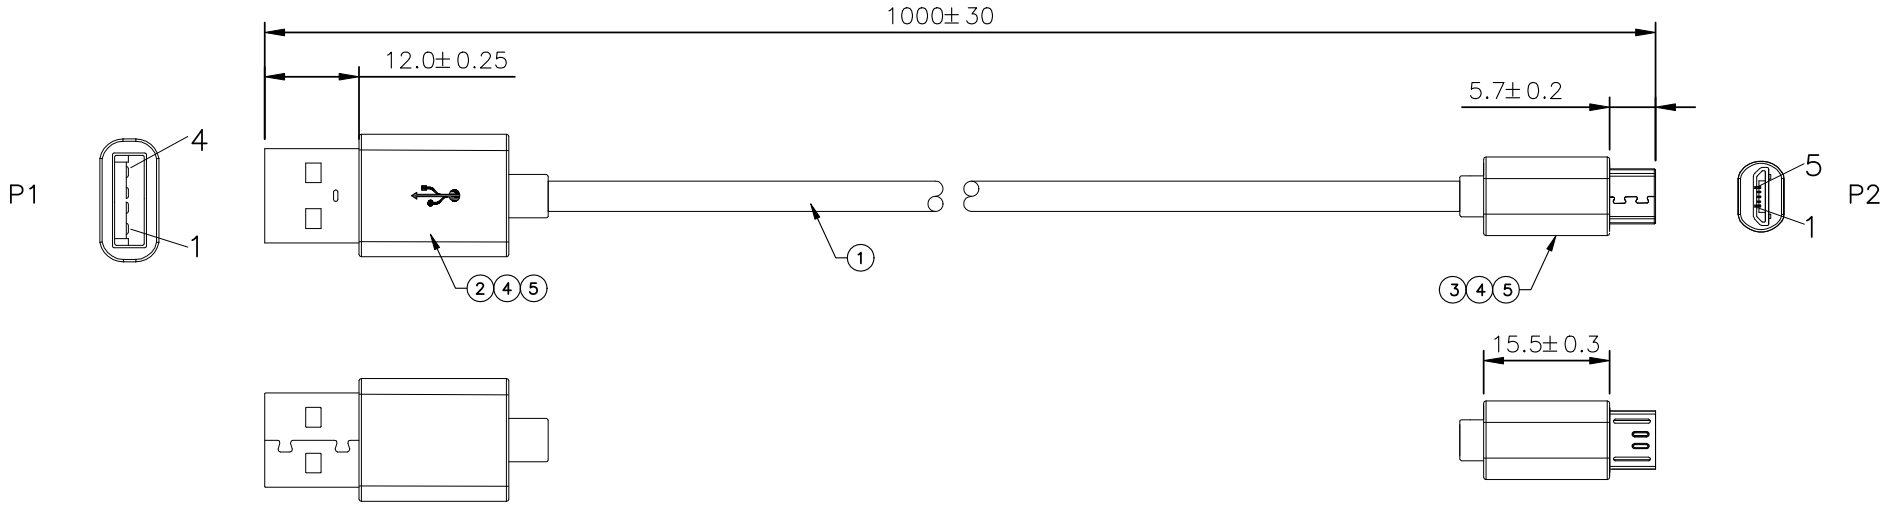

Electrical characteristics requirements:
1) Product must be 100% conduction, open circuit, short circuit test
2) conductive resistance:2Ω MAX
3) Insulation resistance: 10MΩ MIN DC 300V/0.01S
4) There is no scratch, crush, foreign body and other defects in the appearance
5)Products conform to the latest ROHS standard

RoHS Compliant

1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
SHELL	DRAIN	SHELL
P1	COLOR	P2
PIN ASSIGNMENT		

ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL WIRE LENGTH
5	OVERMOLD	–	PVC BLACK 45P 非阻燃 ROHS+REACH	–	–
4	INNERMOLD	–	PP 透明 ROHS+REACH	–	–
3	CONN	–	USB2.0 MICRO USB BLACK G/F 铁壳镀镍 ROHS+REACH	1	–
2	CONN	–	USB2.0 A/M 一体式 BLACK胶芯 G/F 铁壳镀镍 ROHS+REACH	1	–
1	CABLE	–	NO-UL,#30*1P+#26*2C+A+E BLACK PVC OD:3.5MM VW-1 ROHS+REACH	1	1000
MATERIAL SPECIFICATION					

SYM	NAME	DATE	REVISIONS
3			
2			
1			

DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCRIPTION
Lulu 06/19.20'	Iron 06/19.20'	Iron 06/19.20'	Waleed 06/19.20'	USB CABLE

瀚荃股份有限公司
CviLux Corporation

CUST. CODE	
CUC	
DRAWING No.	CviLux P/N
DH50563A	DH-20M50055
CUSTOMER P/N	
–	

SHEET: 1 OF 1