

Flush-type connector - SACC-EM-8MS-4CON-M8/0.5 - 1500347

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator flush-type plug, 4-pos., M8, front/screw mounting, with M8 thread, with 0.5 m TPE litz wire, 4 x 0.25 mm²



Key commercial data

| | |
|------------------------|---------------------|
| Packing unit | 1 |
| Minimum order quantity | 1 |
| Catalog page | Page 26 (PC-2011) |
| GTIN | 4 017918 589080 |
| Custom tariff number | 85366990 |
| Country of origin | GERMANY |

Technical data

General data

| | |
|---------------------------------|--|
| Rated current at 40°C | 4 A |
| Rated voltage | 30 V |
| Number of positions | 4 |
| Volume resistance | ≤ 3 mΩ |
| Insulation resistance | ≥ 100 MΩ |
| Length of cable | 0.5 m |
| Ambient temperature (operation) | -25 °C ... 85 °C (Male connector / female connector) |

General characteristics

| | |
|--------------------------|--------------------------------------|
| Standards/regulations | M8 plug-in connector IEC 61076-2-104 |
| Coding | A - standard |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP67 |
| Contact material | Cu alloy |
| Contact surface material | Au |
| Contact carrier material | PUR / PA66 |
| Material, knurls | Nickel-plated brass |

Flush-type connector - SACC-EM-8MS-4CON-M8/0.5 - 1500347

Technical data

General characteristics

| | |
|-------------------|-------------------------|
| Sealing material | Viton |
| Mounting type | Front mounting M8 x 0.5 |
| Connection method | Individual wires |
| Status display | No |

Conductor data

| | |
|------------------------------------|--|
| Cable type | TPE litz wire |
| Conductor cross section | 0.25 mm ² |
| AWG signal line | 24 |
| Conductor structure signal line | 14x 0.15 mm |
| Core diameter including insulation | 1.15 mm ±0.07 mm |
| Thickness, insulation | 0.21 mm |
| Wire colors | brown, white, blue, black |
| Material conductor insulation | TPE |
| Conductor material | Tin-plated Cu litz wires |
| Insulation resistance | ≥ 20 MΩ*km |
| Conductor resistance | ≥ 80 Ω/km |
| Nominal voltage, conductor | 300 V |
| Test voltage, conductor | 2000 V AC |
| Ambient temperature (operation) | -25 °C ... 90 °C (cable, fixed installation) |

Classifications

eclass

| | |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC001297 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002061 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Flush-type connector - SACC-EM-8MS-4CON-M8/0.5 - 1500347

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / cUL Recognized / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

| | |
|--------------------------------|-------|
| UL Recognized | |
| | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 125 V |

| | |
|--------------------------------|-------|
| cUL Recognized | |
| | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 300 V |


| | |
|------|--|
| GOST | |
|------|--|

| | |
|--------------------------------|-------|
| cUL Recognized | |
| | |
| Nominal current I _N | 4 A |
| Nominal voltage U _N | 125 V |

| | |
|------|--|
| GOST | |
|------|--|

Flush-type connector - SACC-EM-8MS-4CON-M8/0.5 - 1500347

Approvals



Accessories

Accessories

Assembly


Flat nut - SACC-E-MU-M 8 - 1504071



Flat nut with M8 thread


Drawings

Schematic diagram




Pin assignment M8 plug, 4-pos., view male side

Dimensioned drawing



M8 flush-type connector

Circuit diagram

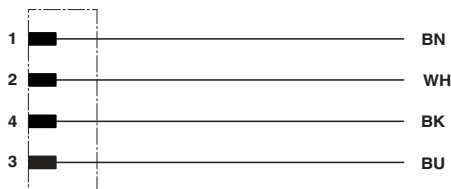

Contact assignment of M8 plugs/sockets

Flush-type connector - SACC-EM-8MS-4CON-M8/0.5 - 1500347

Dimensioned drawing

