



### Electrical Specifications

**Cut Off Frequency:** 15GHz  
**Pass Band Frequency:** 15~25GHz  
**Pass Band Insertion Loss:**  
 $\leq 2.0\text{dB}$  @ 15~15.8GHz  
 $\leq 1.0\text{dB}$  @ 15.8~25GHz  
**Pass Band VSWR:**  
 $\leq 1.6:1$  @ 15~20GHz  
 $\leq 1.8:1$  @ 20~25GHz  
**Stop Band Attenuation:**  $\geq 60\text{dB}$  @ DC~13.7GHz  
**Impedance:** 50 Ohms  
**Power Handling:**  $\leq 15\text{W}$


### Mechanical

**Mounting Method:** Through Holes  
**Connector Type:** SMA-Female  
**Dimensions:** 24 x 19 x 10 mm

### Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 Hz

### Outline Drawing:

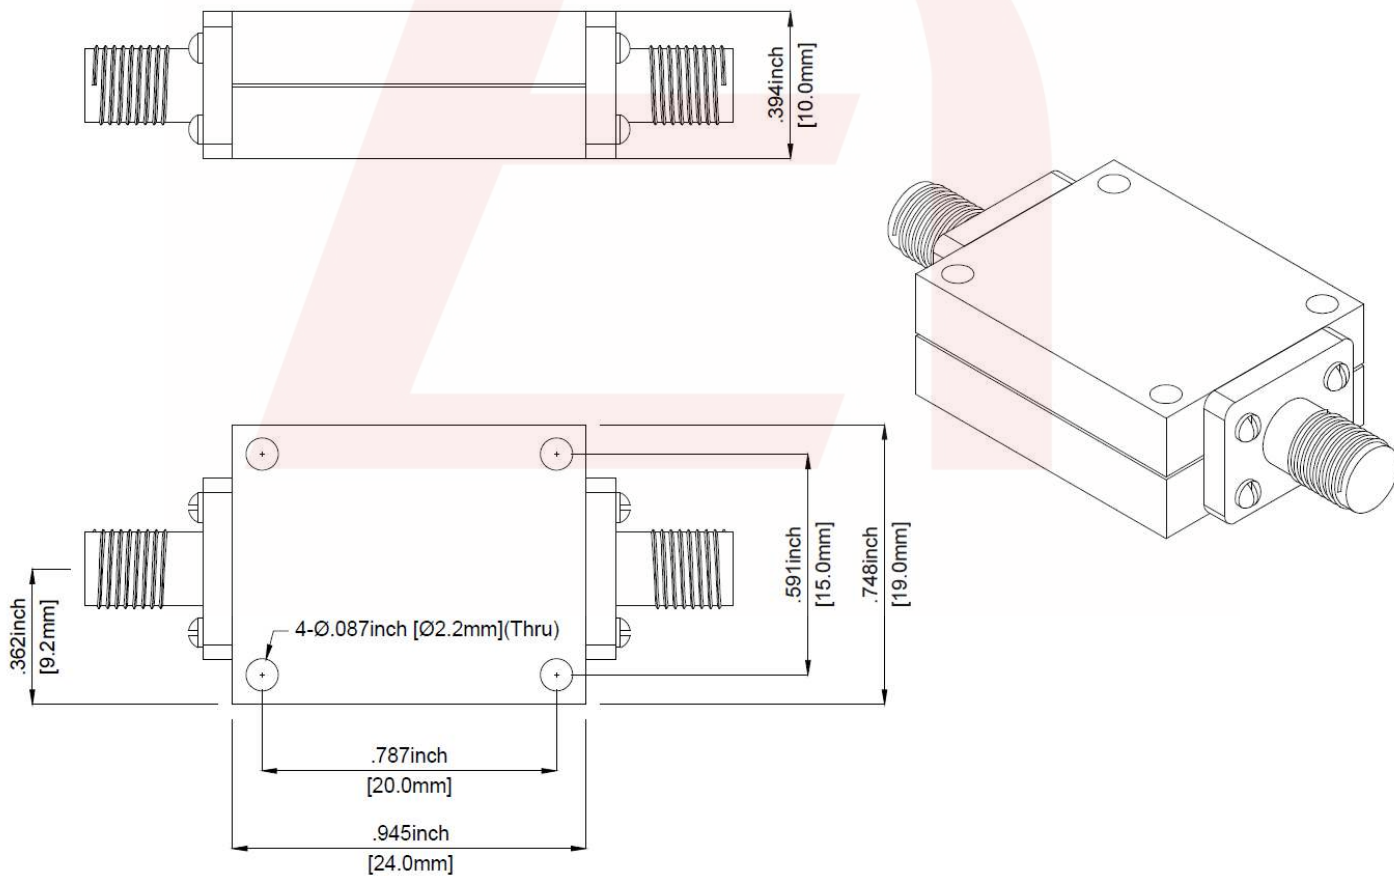

DS-SSH6576-01252019-Rev0