

EnFilm™ - rechargeable solid state lithium thin film battery

Datasheet - production data


Features

- All solid state
- Ultra-thin
- Fast recharge
- Low capacity loss
- Long cycle life
- RoHS compliant

Applications

Device is intended to be used in a wide range of applications including:

- Sensors
- Backup power
- Health care devices
- Wearable applications
- Smart card (see [Section 2.2: "Embedded assembly"](#))
- RF ID tags
- Energy storage for energy harvesting devices
- Internet of things

Description

The EFL1K0AF39 is a thin film rechargeable lithium battery. The battery has a LiCoO₂ cathode, LiPON ceramic electrolyte and a lithium anode.

Table 1: Device summary

Symbol	Value
Capacity	1 mAh
V _{nominal}	3.9 V
V _{op}	3.0 to 4.2 V
R _{int}	80 Ohm
I _p	15 mA
Dimension	25.8 mm x 28.8 mm
Thickness	160 μm

1 Characteristics

Table 2: Absolute ratings

Symbol	Parameter	Value	Unit
V _{op}	Operating voltage	3.0 - 4.2	V
I _C	Maximum continuous discharge current	5	mA
I _P	Maximum pulsed discharge current ⁽¹⁾	15	mA
T _{stg}	Storage temperature range	-20 to 60	°C
T _{op}	Operating temperature range ⁽²⁾	-20 to 60	°C

Notes:

⁽¹⁾Pulsing conditions: 100 ms on, 0.9 s off, cut-off voltage during pulse = 2 V. For higher pulses current contact ST representative.

⁽²⁾1/30 C discharge rate at -20 °C: operating at 60 °C reduces the cycle life.


Table 3: Electrical characteristics



Symbol	Parameter		Test conditions	Min.	Typ.	Max.	Unit
C	Nominal capacity (minimum)		Current discharge = 100 μA, from 4.2 to 3 V at T = 25 °C	1		-	mAh
			Current discharge = 1 mA, from 4.2 to 3 V at T = 25 °C	0.7		-	
R _{int}	Internal resistance		T = 25 °C		80	-	Ohm
C _t	Charge time to 80% of full capacity		Constant voltage = 4.2 V T >= 25 °C		20	-	min
C _{life}	Cycle life (to minimum of 80% of initial capacity) at 25 °C ⁽¹⁾			4000		-	Cycle
S _{Dish}	Self-discharge	Charge loss (recoverable)	T = 25 °C, SoC = 50%		3	-	% year
		Capacity loss (Non-recoverable)			20	-	% over 10 years

Notes:

⁽¹⁾1 C discharge rate: cycling between SoC = 75% to SoC = 0% (SoC = state of charge)

1.1 Characteristics curves

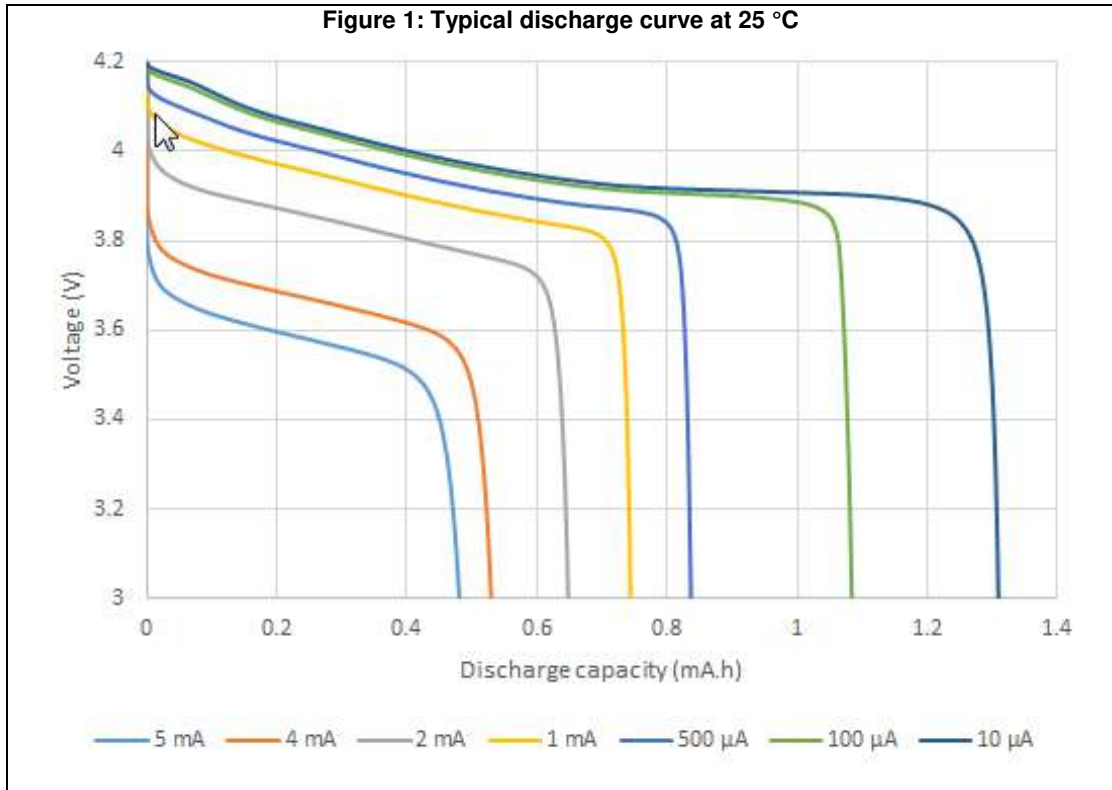

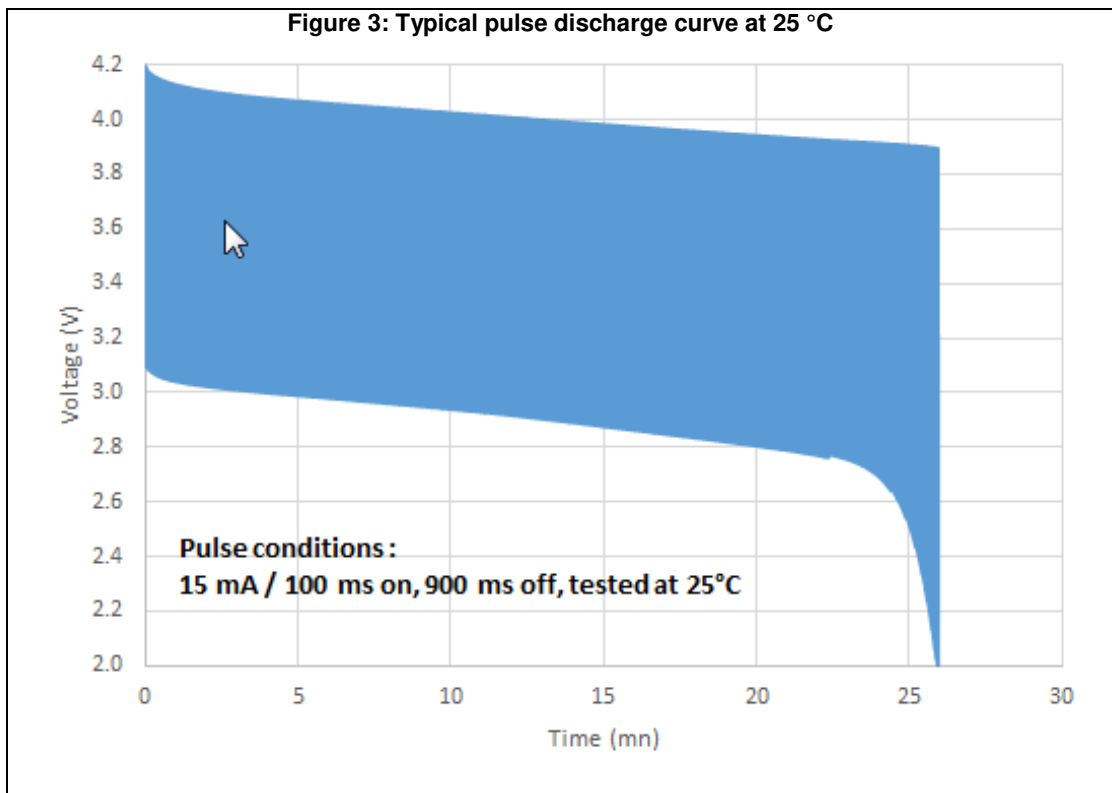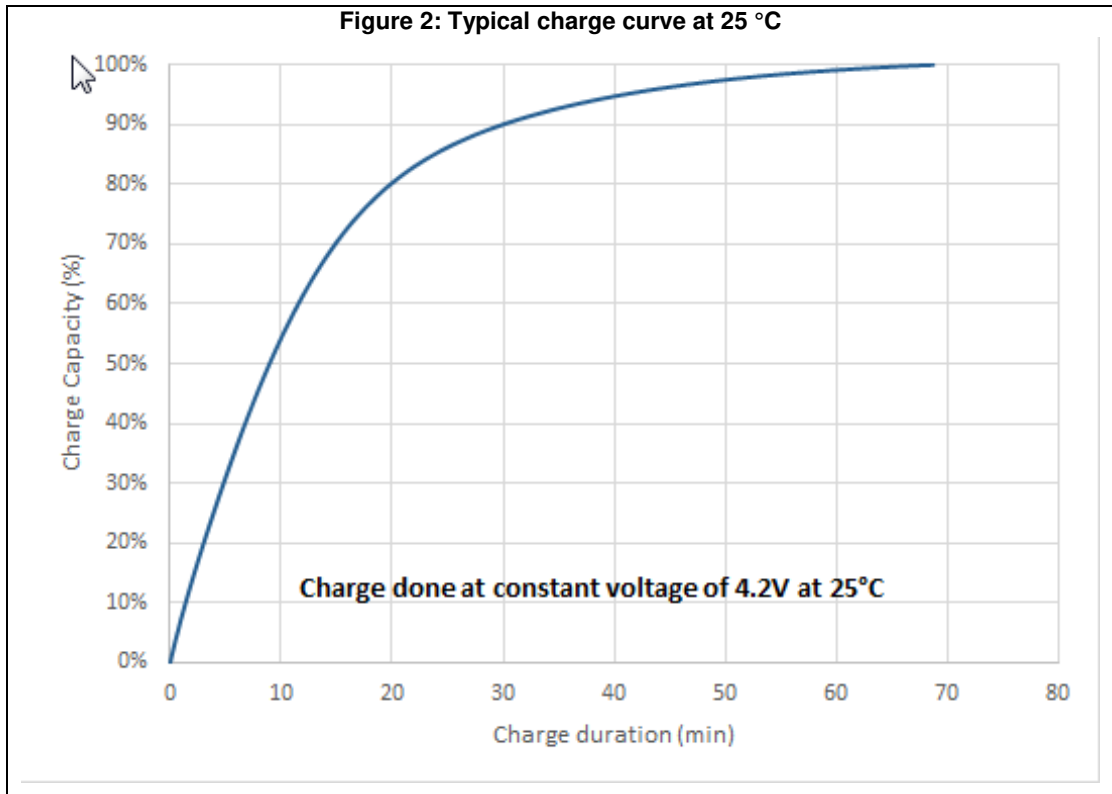

2 Application information

This product is not authorized for use in (i) implantable medical devices (devices placed under the skin (devices such as hearing aids are not considered implantable medical devices)), (ii) US government specific (custom) applications or (iii) wafer test devices (“Prohibited Applications”). ST disclaims any liability, including any intellectual property infringement or misappropriation claims, resulting from the use of the product in prohibited applications. Any such use shall be at customer’s sole risk and the customer shall defend, indemnify and hold harmless ST from any liability, damage, costs or expense (including attorney fees) resulting from such use. Furthermore, ST shall stop selling the product for use in the Prohibited Applications if customer does not cease using the product in the Prohibited Applications within 15 days of notice until such time as customer has taken precautions reasonably satisfactory to ST to prevent such prohibited use. Customer shall be responsible to ST for any finished goods or work in process in such instance similar to any order cancellation.

2.1 Handling precautions

Do not short circuit the 2 connection pads. A short circuit incident may not always result to an immediate failure, but it can degrade the battery life. Handle the batteries in a non-conductive work space to prevent accidental short circuiting.

Handle the thin film batteries with care to prevent breaking/cracking the substrate. Do not force or abruptly bend the batteries.


2.2 Embedded assembly

EnFilm™ batteries are fabricated by stacking very thin solid films for the active cell, and protected using a metallized cover with barrier adhesives. This structure consequently results to the battery being vulnerable to pressure and/or temperature during assembly, and can result to its degradation.

The below figure shows the potential allowable assembly conditions - pressure applicable on the EFL1K0AF39 versus the temperature for a maximum time of 3 minutes. The batteries should be first put in a 0% state of charge (SOC) before their assembly in order to minimize capacity/internal resistance drifts or degradation.

Please contact your local ST office for your embedded assembly process requirements.

Figure 4: Embedded assembly constraint at 0% SOC

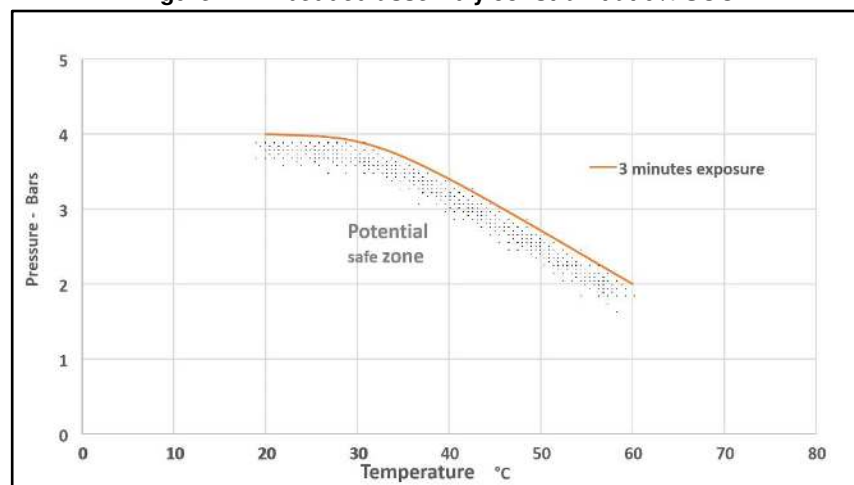

3 Recommended charge and discharge processes

3.1 Charge

Battery can be charged from a $4.2\text{ V} \pm 0.05\text{ V}$ constant voltage source with or without current limit. More than 90% of the total capacity is recharged when the charge current falls below 0.1 mA.

3.2 Discharge

When discharging under constant current or constant load, the cut-off voltage should be no less than 3.0 V. Cut-off voltage can be lowered to 2 V for pulsed discharge.

3.3 Design recommendations

Refer to STMicroelectronics application note:

- AN4085: EnFilm™ series user guide.

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 EnFilm package information

Figure 5: EnFilm package outline


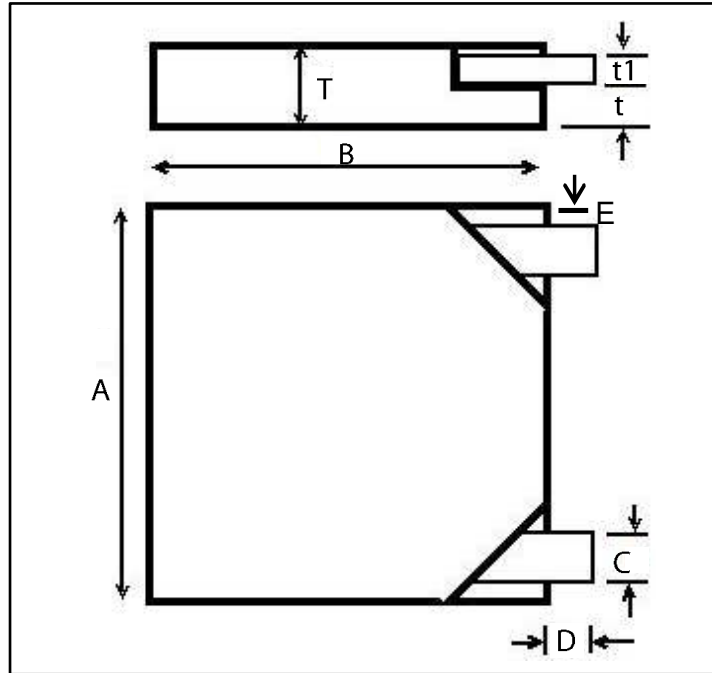


Table 4: EnFilm package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	25.4	25.8	26.1	1.000	1.016	1.028
B	25.4	25.8	26.1	1.000	1.016	1.028
C	2.4	2.5	2.6	0.094	0.098	1.102
D	2.20	3	3.5	0.087	0.118	0.138
E		0.5	0.7		0.020	0.028
T		0.16	0.2		0.006	0.008
t		0.05			0.002	
t1		0.025			0.0010	

Figure 6: Footprint

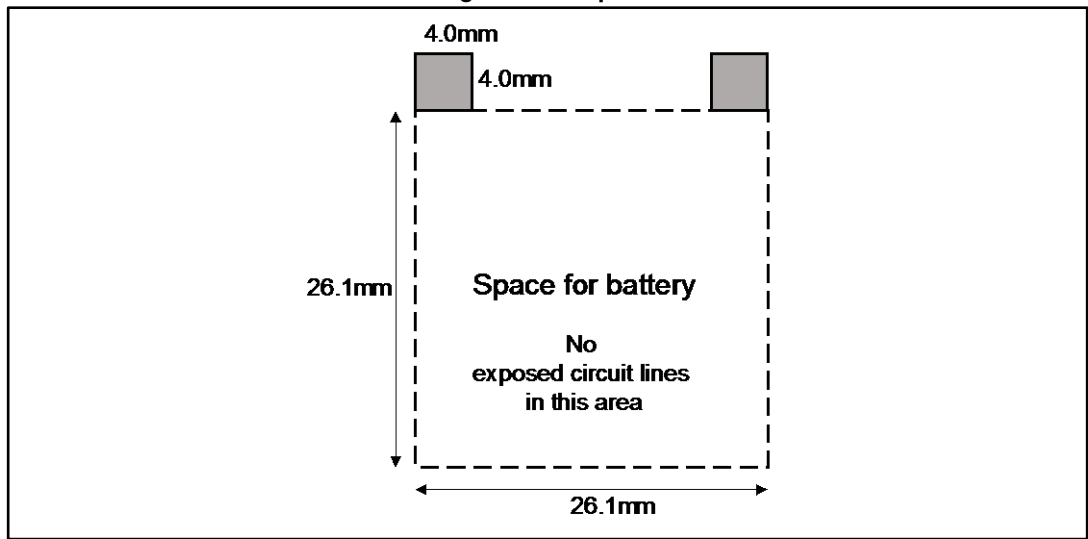

5 Packing information

Figure 7: Tray outlines


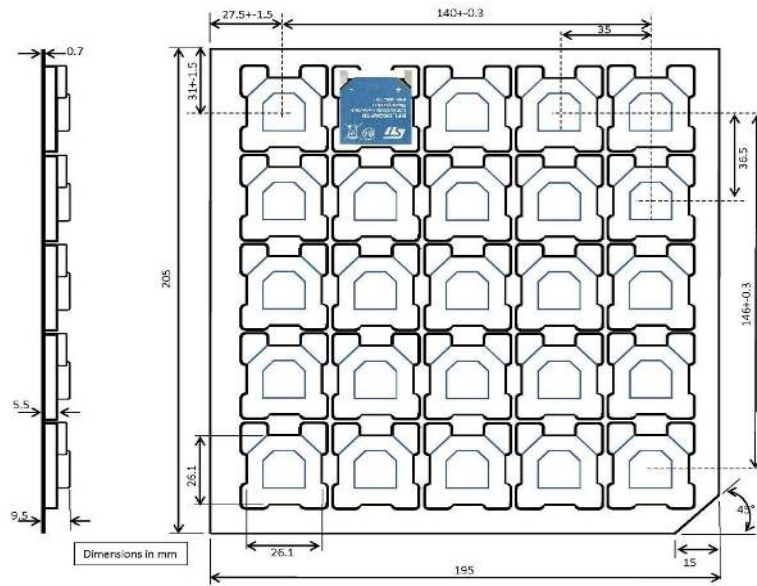


Figure 8: Tape and reel outlines

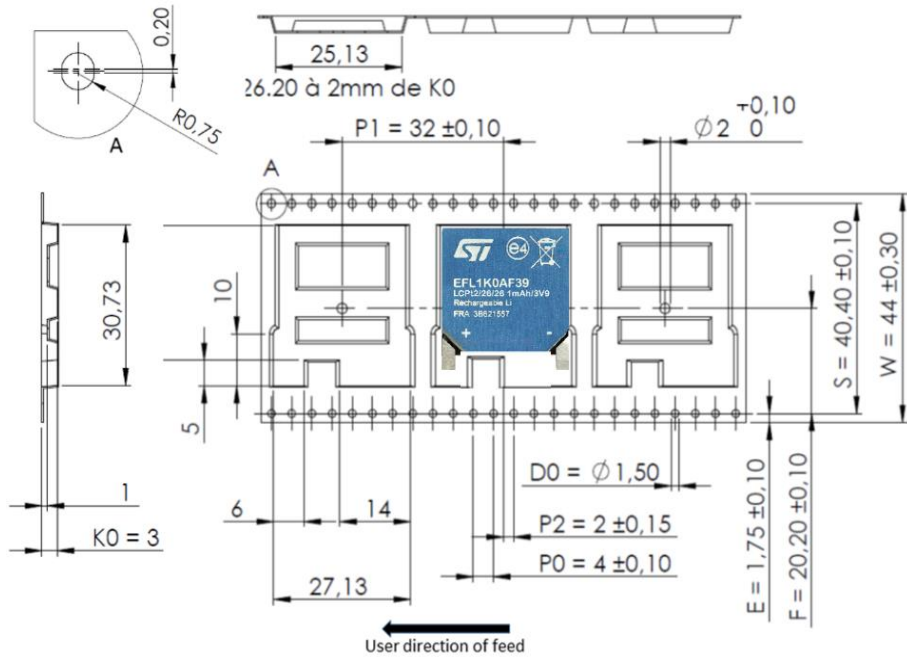

6 Recommendation for the PCB assembly

Refer to STMicroelectronics technical note:

- TN1249: EnFilm™ micro-battery EFL1K0AF39 mounting on printed circuit board.

7 Ordering information

Figure 9: Ordering information scheme

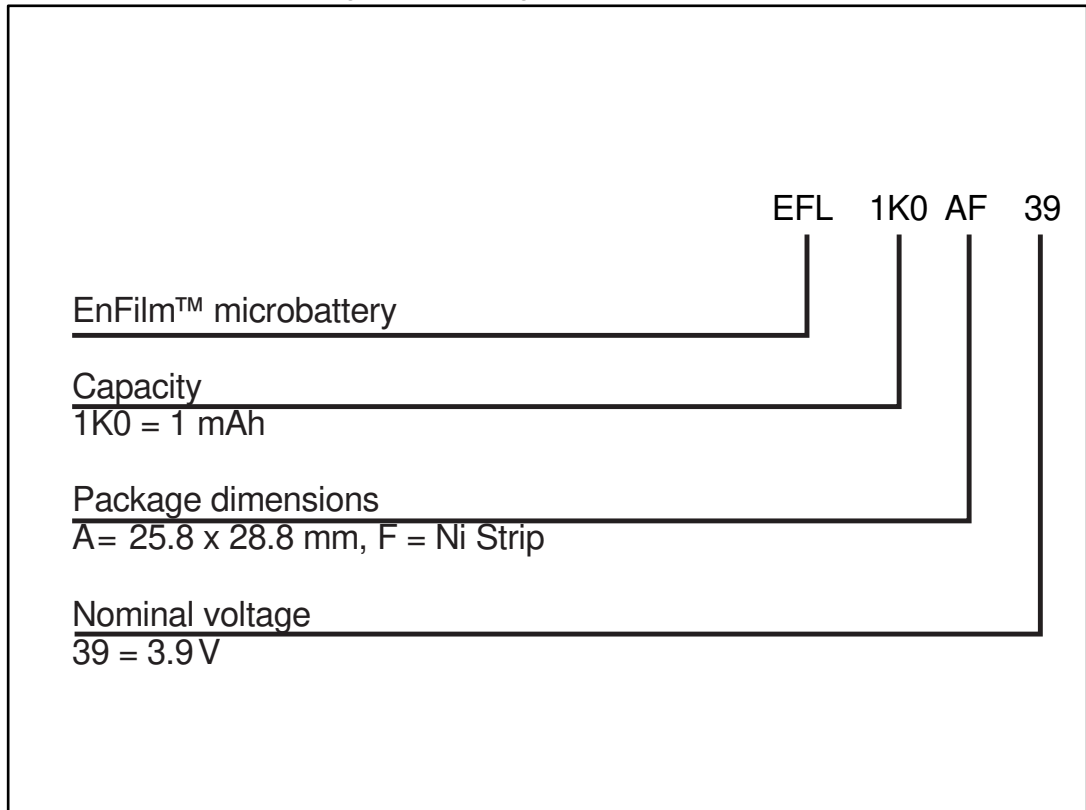


Table 5: Ordering information

Order code	Marking	Weight	Base qty.	Delivery mode
EFL1K0AF39	EFL1K0AF39	0.3 g	25	Tray
EFL1K0AF39RL	EFL1K0AF39	0.3 g	100	Tape and reel

8 Revision history

Table 6: Document revision history

Date	Revision	Changes
03-Jul-2017	1	First issue
07-Sept-2017	2	Updated Section "Applications" , Table 1: "Device summary" and Section 1: "Characteristics" . Added Section 2.1: "Handling precautions" and Section 2.2: "Embedded assembly" .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved