












DESCRIPTION: POWER COMBO SOLDER CUP

FACE VIEW OF RECEPTACLE IS SHOWN



PART NUMBER KEY

680 XXXX X 0 2 XX 1

SERIES

680

SHELL SIZE

5W1

3W3

3W3K

7W2

11W1

5W5

13W3

17W2

21W1

8W8

21WA4 (SEE BELOW)

GENDER

1 = MALE (PLUG)

2 = FEMALE (RECEPTACLE)

TERMINATION TYPE

0 = SOLDER CUP

SHELL PLATING

2 = TIN/ZINC

POWER CONTACT

20 = 20 AMP

40 = 40 AMP

CONTACT PLATING

1 = GOLD FLASH

68021WA4 PART NUMBERS = 68021WA4P201 = MALE 20 AMP
 68021WA4P401 = MALE 40 AMP
 68021WA4S201 = FEMALE 20 AMP
 68021WA4S401 = FEMALE 40 AMP



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
6-3-02

CHECKED:

DATE:

NorComp

SCALE:


SHEET 1 OF 1

REV 3


DWG NO.

680 SERIES CONNECTORS


DESCRIPTION: SIGNAL/POWER CONTACTS

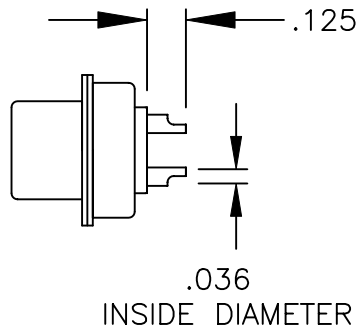

SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

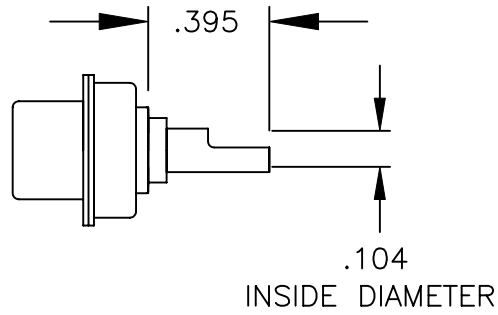


20 AMP POWER CONTACTS
ACCEPTS UP TO 12 AWG WIRE

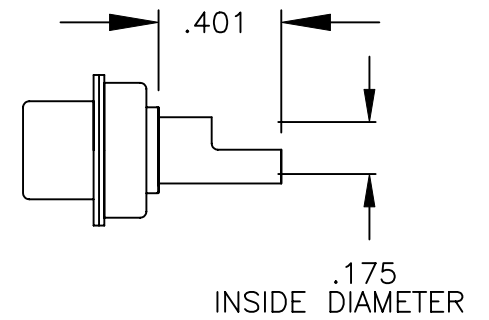

40 AMP POWER CONTACTS
ACCEPTS UP TO 8 AWG WIRE

NOTE: SIGNAL AND POWER CONTACTS COME PRE-LOADED INTO INSULATOR.

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 6-5-02
	<h1>NorComp</h1>			CHECKED:
SCALE:				SHEET 1 OF 1
DWG NO. 680 XXXX X 0 2 XX 1				