

<b>—</b>	G	нт. П	m	D	0



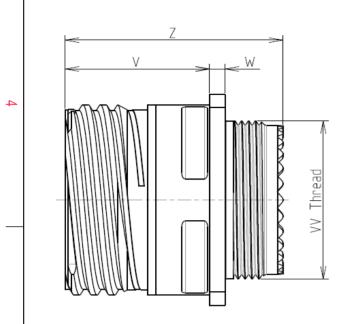

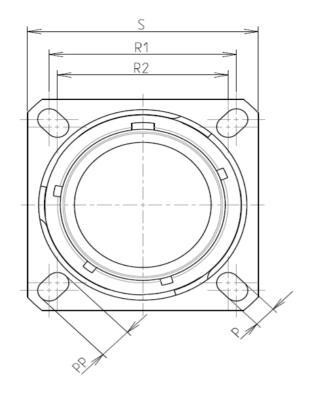

Keying Shown as example

## CHARACTERISTICS

ω

 $\sim$ 


-Mass


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	<u>-</u> -65℃ to +175℃
-Salt Spray	: 500 hours

: 10.45 g ± 10%

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g





А

1 General linear
WWW.SOURIAU.C
SOURIAU
8D009W9
C

0		σ		A		
			<b>\</b>			4
LAY	OUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D009W98SB						2
rst Release Latest modification	n - by				MOD N°	
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series						
	General linear Tolerances: ±		NPRDS / PF <b>859</b> This docum	ent is the prope	rty of	1
WWW.SOURIAU.COM         SOURIAU           it must not be reproduced or communicated without permission				nission		
		JRG N°			SHEET	
	SOURIAU I 8D009W9				1/2	

ſ	Ŧ	۵	г П	m	Ū	0	
		Contact Layout				Ρ	anel Cutou
4	-X				Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	X_avis (mm)         Y-axis (mm)           +.065 (1.65)         +.038 (0.97)           +.000 (0.00)        075 (1.91)          065 (1.65)         +.038 (0.97)           er of         Size           contacts         rating           location         Supersedes				ØA	ØT_
ω						Dim ØA ØAA R1 ØT	
	L				<b></b>		
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of ommendat
N						PN: 8[	Countr FR D009V
					A 03-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
					TITLE		iminium
<b>→</b>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOUI	RIAU.C
				_	FORMAT A3		JRIAU 009W
L	Н	G	F	E	D	C	

