


5. Application for individual signal mode

5-1. Layout Guide (Unit : mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

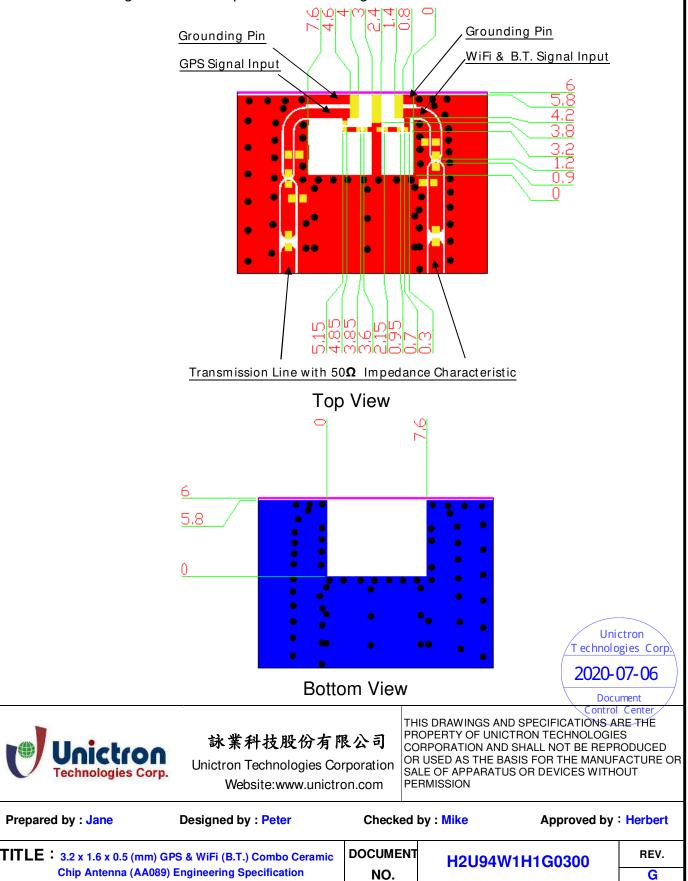

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²) 5-2-1. Electrical Table (GPS Band)

Charact	eristics	Specifications	Unit
Outline Dimensions	5	3.2 x 1.6 x 0.5	mm
Ground Plane Dime	ensions	80 x 40	mm
Working Frequency	/	1575.42	MHz
Isolation(S ₂₁)		\leq -20 (typical)	dB
VSWR (@ center fr	requency)*	2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain	(@1575.40 MH-)	1.3 (typical)	dBi
Efficiency	(@1575.42 MHz)	61 (typical)	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

5-2-2. Electrical Table (WiFi & B.T. Band)

Charact	eristics	Specifications	Unit
Working Frequency	,	2400~2500	MHz
Isolation(S ₂₁)		\leq -16 (typical)	dB
VSWR (@ center fr	equency)*	2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain		1.8 (typical)	dBi
Efficiency	(@2442 MHz)	68 (typical)	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.




詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com


Control Cente THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Unictron Technologies Corp. 2020-07-06 Document

Prepared by : Jane	Designed by : Peter	Checked	by : Mike	Approved by : Herbert				
TITLE: 3.2 x 1.6 x 0.5 (mr	DOCUMENT	H2U94W1H1G0300					REV.	
Chip Antenna (AA	089) Engineering Specification	NO.						G
			PA	GE	3		OF	28

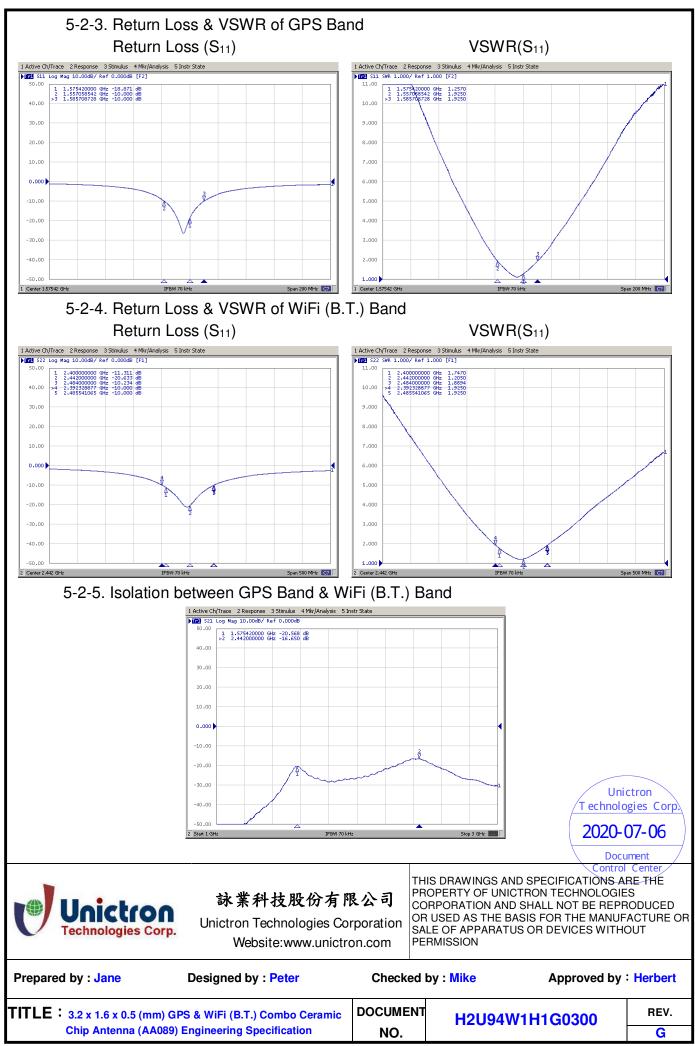

PAGE 4 OF

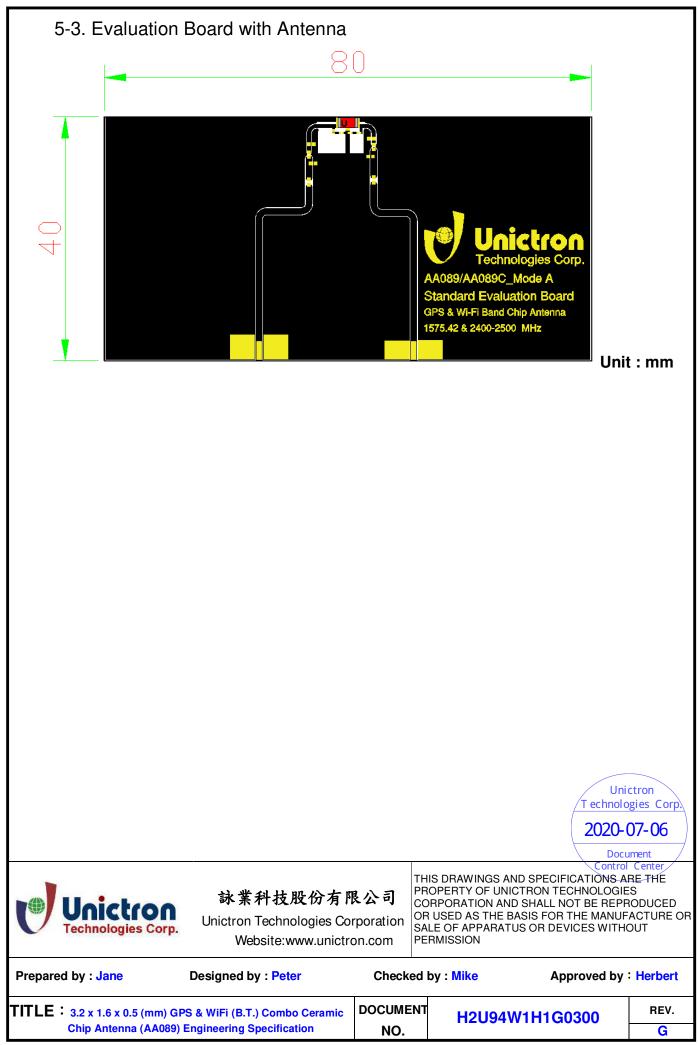


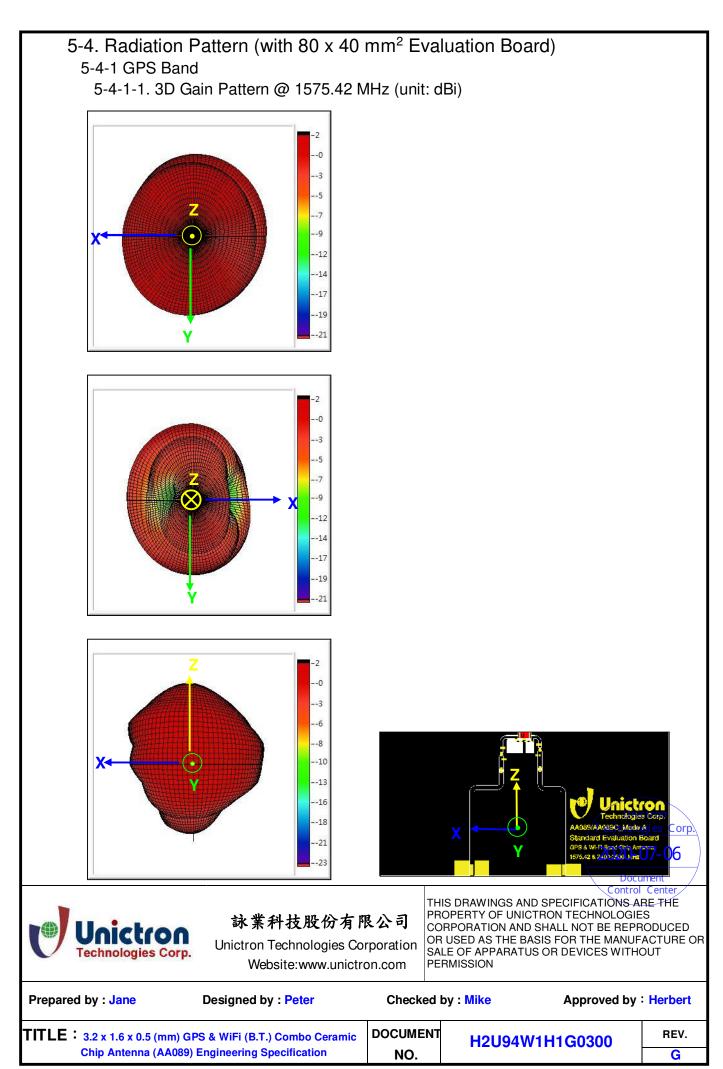


5-4-1-2. 3D Efficiency Table


Frequency(MHz)	1570	1571	1572	1573	1574	1575	1576	1577	1578	1579	1580
Efficiency(dB)	-2.1	-2.1	-2.1	-2.1	-2.1	-2.1	-2.1	-2.1	-2.2	-2.2	-2.2
Efficiency(%)	61.0	61.4	61.7	61.6	61.4	61.4	61.3	61.0	60.7	60.6	60.0
Peak Gain(dBi)	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.1	1.1




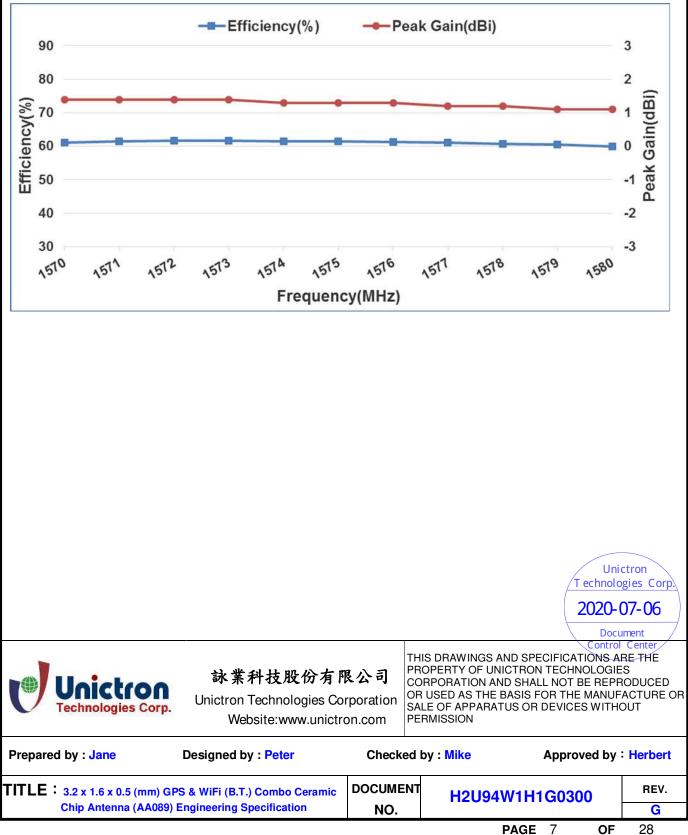

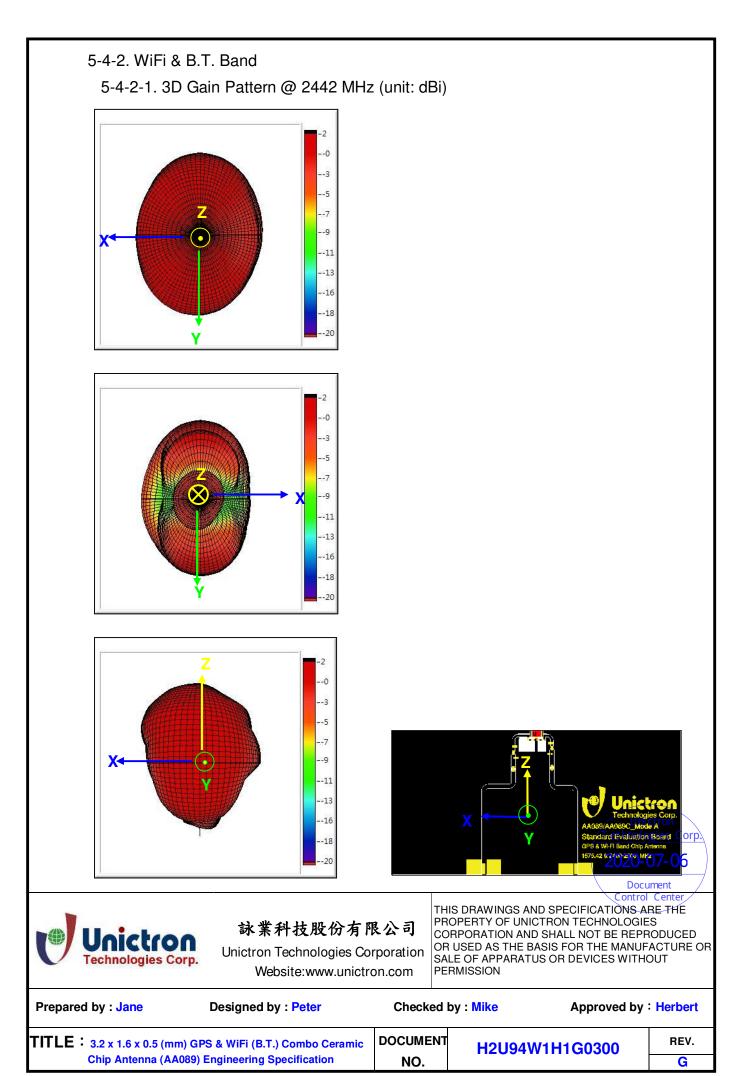


5-4-2-2	5-4-2-2. 3D Efficiency Table															
Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484	2500
Efficiency(dB)	-2.2	-2.1	-2.0	-1.9	-1.8	-1.7	-1.7	-1.6	-1.7	-1.6	-1.6	-1.6	-1.6	-1.8	-2.2	-2.5
Efficiency(%)	59.6	61.1	63.8	64.7	66.1	67.7	68.1	68.7	68.1	68.9	69.0	69.2	68.5	66.4	59.7	56.6
Peak Gain(dBi)	1.7	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.7	1.7	1.8	1.8	1.8	1.8	1.6	1.5
														•		

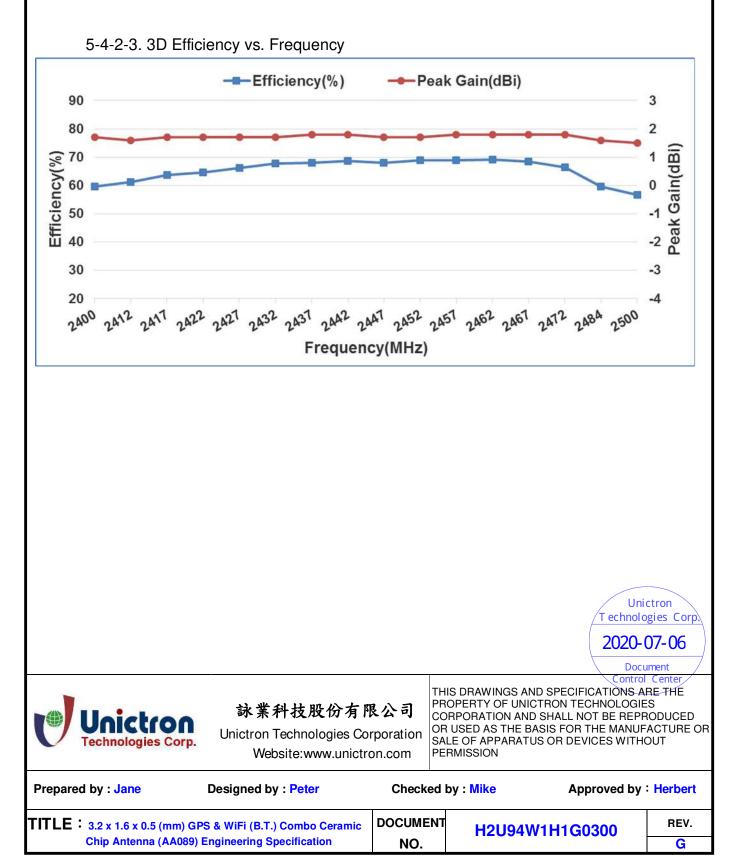

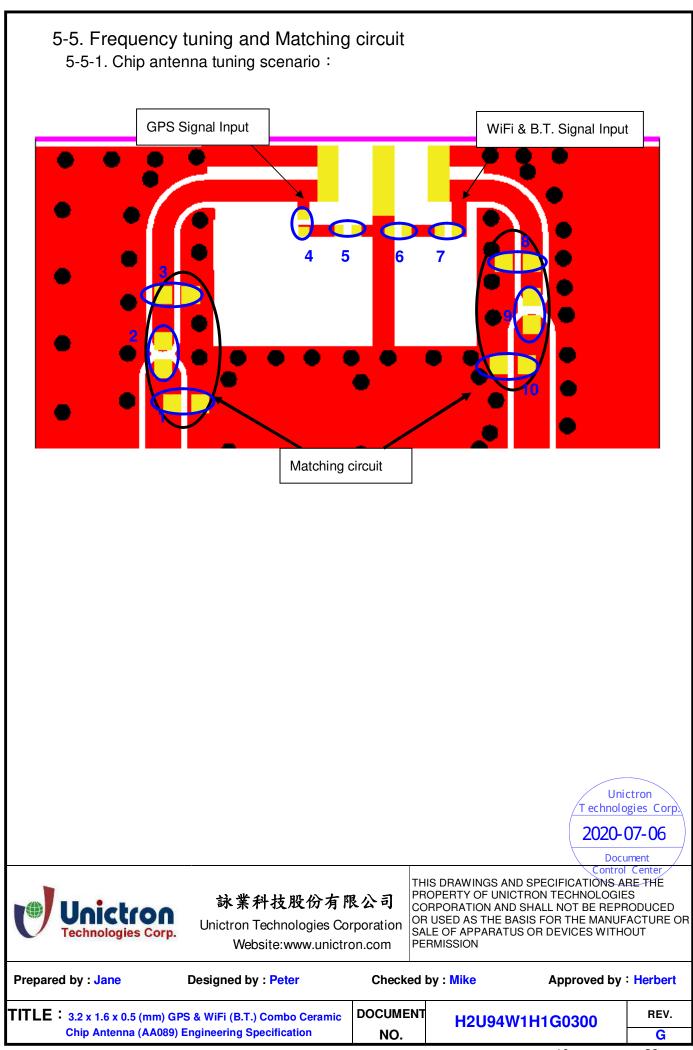

5-5-2. Matching circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 1575.42 MHz on GPS band and 2442 MHz on WiFi (B.T.) band at our standard 80 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

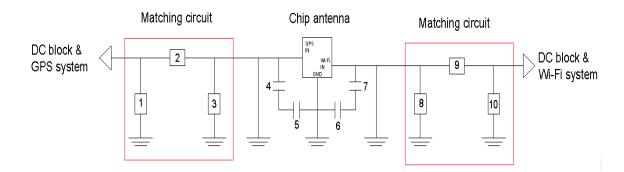

System Ma	atching Circuit (Component	
Location	Description	Vendor	Tolerance
1	N/A	-	-
2	4.7nH, (0402)	MURATA	±0.3nH
3	N/A	-	-
4 Fine tuning element	2.7pF, (0201)	MURATA	±0.05pF
5 Fine tuning element	1pF, (0201)	MURATA	±0.05pF
6 Fine tuning element	0.6pF, (0201)	MURATA	±0.05pF
7 Fine tuning element	0.8pF, (0201)	MURATA	±0.05pF
8	N/A		
9	0 Ω, (0402)	-	-
10	N/A		
DC Block	22pF, (0402)	MURATA	±5%



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Unictron Technologies Corp. 2020-07-06 Document Control Cent


Prepared by : Jane	Designed by : Peter	Checked	by : <mark>Mike</mark>		Approved by : Herbert			
TITLE: 3.2 x 1.6 x 0.5 (mm Chip Antenna (AA	DOCUMENT NO.	ENT H2U94W1H1G0300					REV. G	
			PA	ĠΕ	11	0	F	28

6. Application for combined signal mode

6-1. Layout Guide (Unit : mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

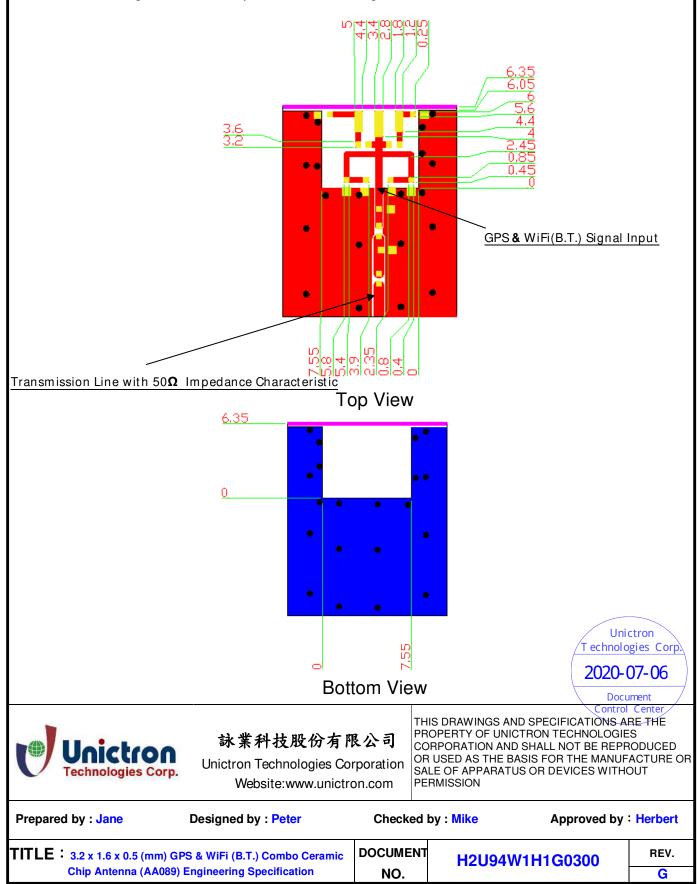

6-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²) 6-2-1. Electrical Table (GPS Band)

Charact	eristics	Specifications	Unit
Outline Dimensions	3	3.2 x 1.6 x 0.5	mm
Ground Plane Dime	ensions	80 x 40	mm
Working Frequency	/	1575.42	MHz
VSWR(@ center fre	equency)*	2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain	(@1575.40 MH-)	2.0 (typical)	dBi
Efficiency	(@1575.42 MHz)	65 (typical)	%

*Center frequency means the resonance frequency of chip antenna on the evaluation board.

6-2-2. Electrical Table (WiFi & B.T. Band)

Charact	eristics	Specifications	Unit
Working Frequency	,	2400~2500	MHz
VSWR(@ center fre	equency)*	2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain		-0.4 (typical)	dBi
Efficiency	(@2442 MHz)	54 (typical)	%

*Center frequency means the resonance frequency of chip antenna on the evaluation board.




詠業科技股份有限公司


Unictron Technologies Corporation Website:www.unictron.com

Document Control Cente THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Unictron Technologies Corp. 2020-07-06

Prepared by : Jane	Designed by : Peter	Checked I	oy : <mark>Mike</mark>	Approved by : Herbert				
	n) GPS & WiFi (B.T.) Combo Ceramic	DOCUMENT	H2U94W1H	REV.				
Chip Antenna (AA	089) Engineering Specification	NO.				G		
			PAGE	13	OF	28		

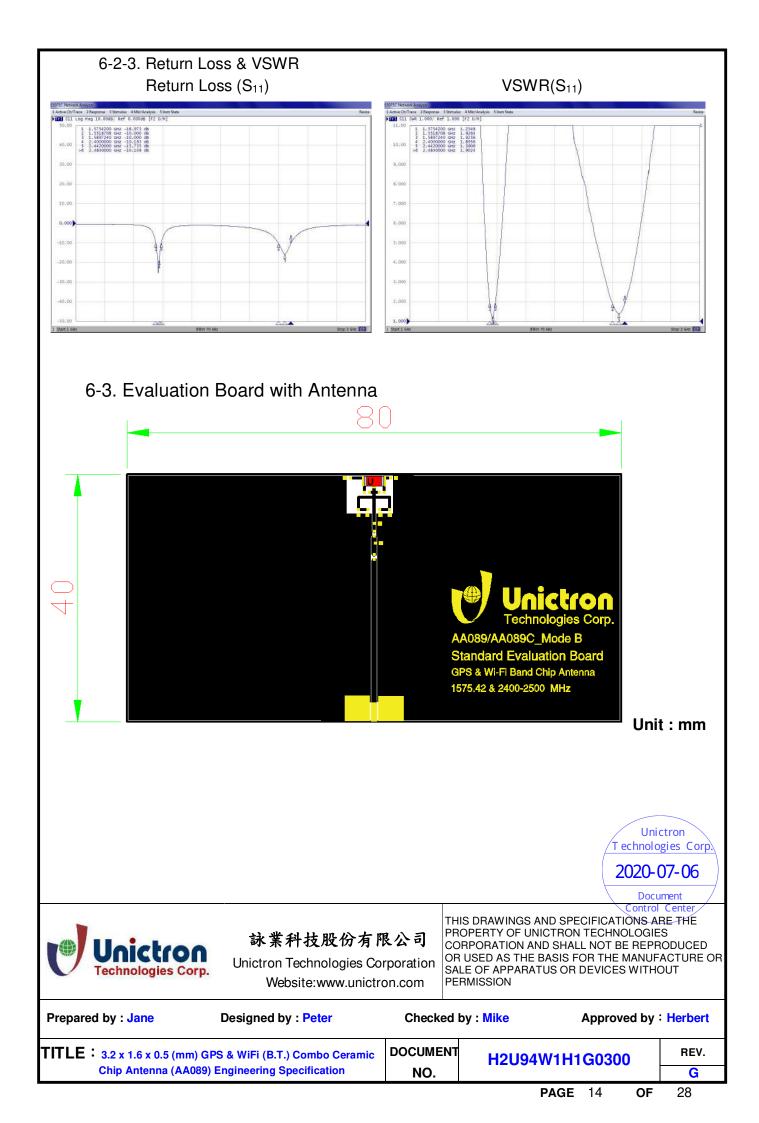


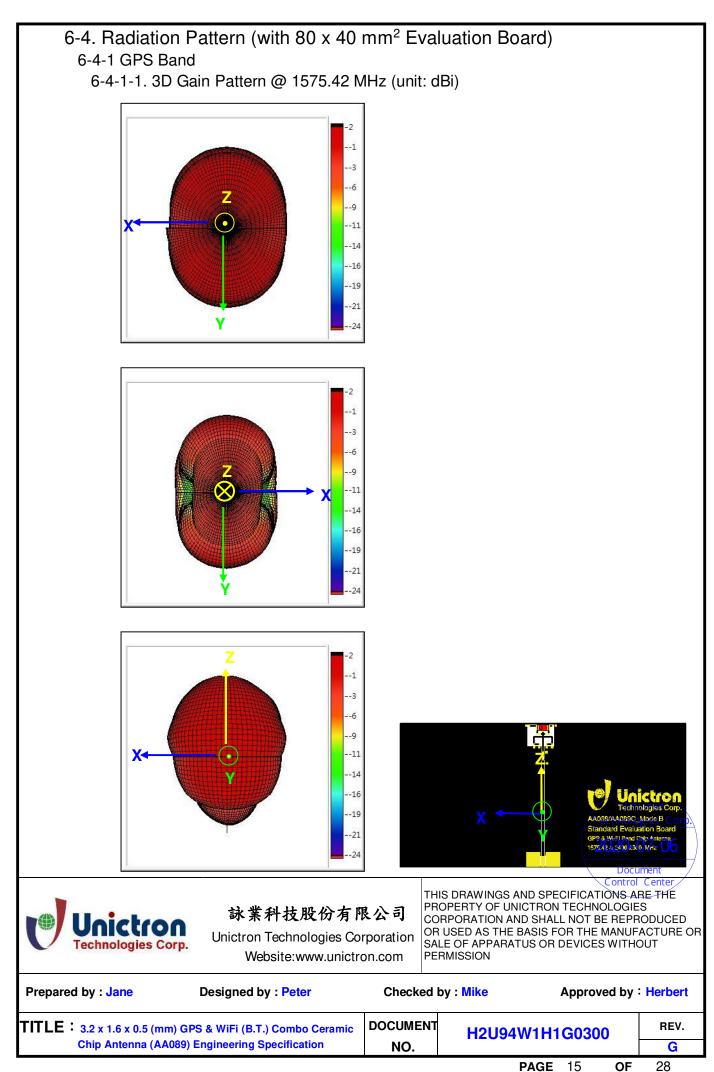

6-4-1-2. 3D Efficiency Table


Frequency(MHz)	1570	1571	1572	1573	1574	1575	1576	1577	1578	1579	1580
Efficiency(dB)	-2.0	-1.9	-1.9	-1.9	-1.9	-1.8	-1.8	-1.8	-1.8	-1.7	-1.8
Efficiency(%)	63.7	64.4	65.0	65.0	65.2	65.6	65.9	66.4	66.7	67.0	66.8
Peak Gain(dBi)	2.0	2.0	2.0	2.0	2.0	2.0	2.1	2.1	2.2	2.2	2.1




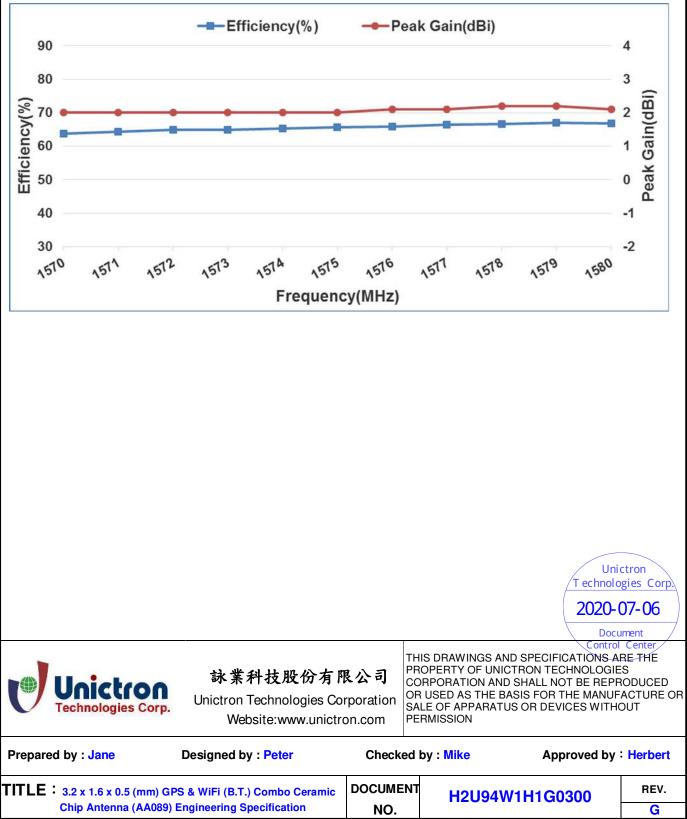


OF

PAGE 16

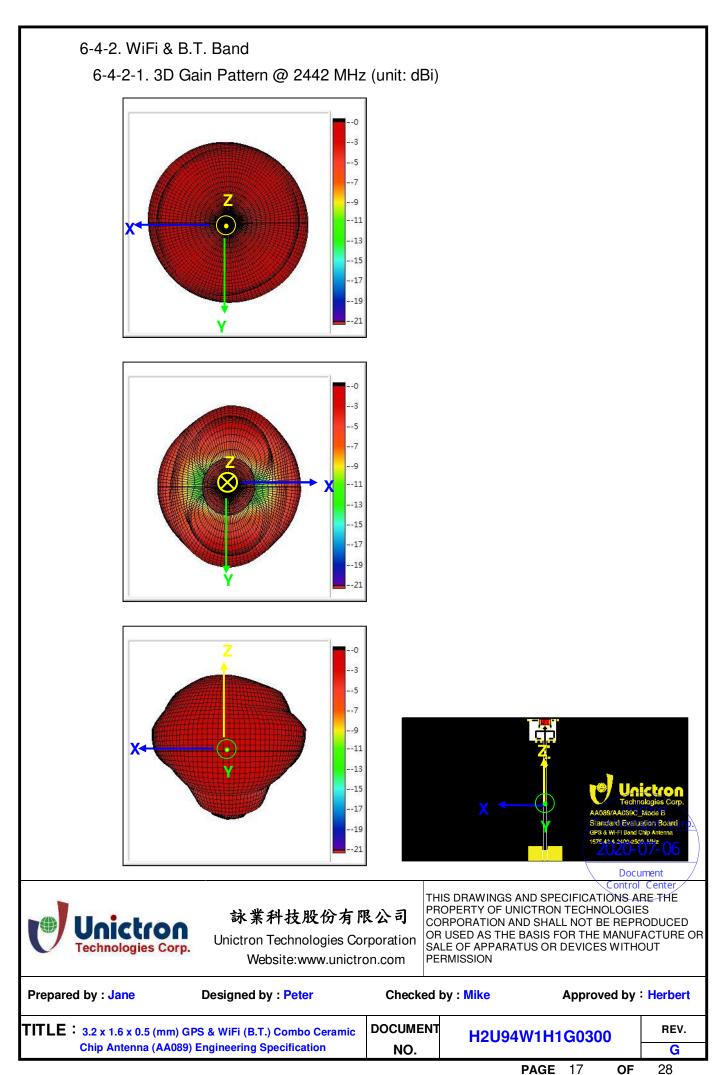

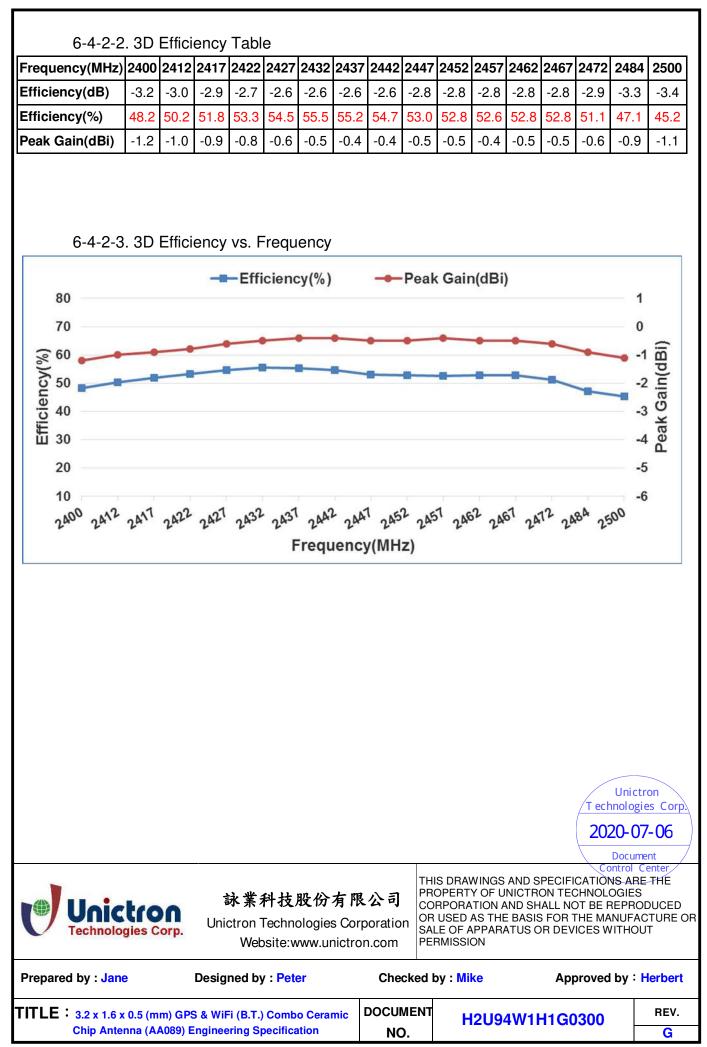


PAGE 18 OF

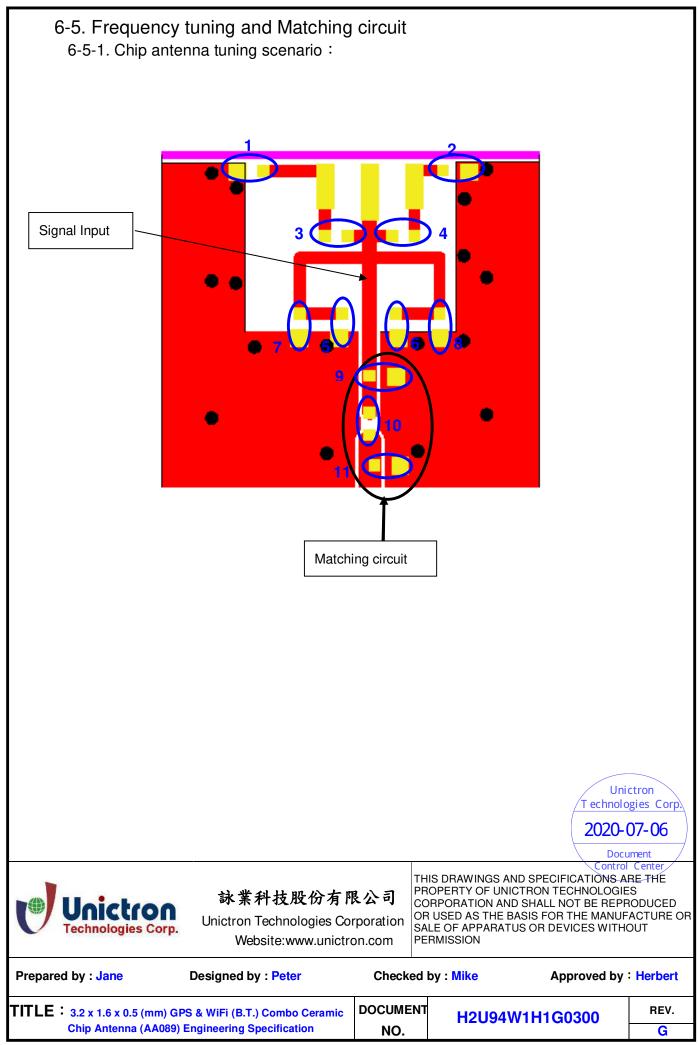

6-5-2. Matching circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 1575.42 MHz on GPS band and 2442 MHz on WiFi (B.T.) band at our standard 80x40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

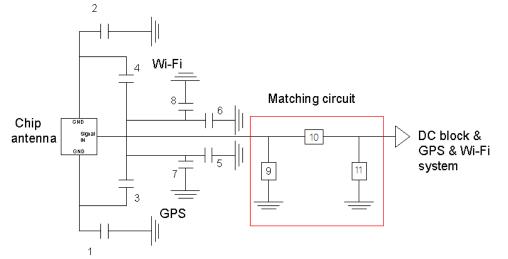

System Ma				
	<u> </u>			
Location	Description	Vendor	Tolerance	
1 Fine tuning element	4.3pF, (0402)	MURATA	±0.05pF	
2 Fine tuning element	2.2pF, (0402)	MURATA	±0.05pF	
3 Fine tuning element	1.5pF, (0201)	MURATA	±0.05pF	
4 Fine tuning element	0.8pF, (0201)	MURATA	±0.05pF	
5 Fine tuning element	39pF, (0402)	MURATA	±5%	
6 Fine tuning element	0 Ω, (0402)	-	-	
7 Fine tuning element	N/A	-	-	
8 Fine tuning element	N/A	-	-	
9	1.5pF, (0402)	MURATA	±0.05pF	
10	0 Ω, (0402)	-	-	Unictron
11	N/A	-	-	Technologies Corp.
DC Block	22pF, (0402)	MURATA	±5%	2020-07-06
				Document




詠業科技股份有限公司 Unictron Technologies Corporation


Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Control Cent


Prepared by : Jane	Designed by : Peter	Checked	by : <mark>Mike</mark>	Approved by	Herbert
TITLE: 3.2 x 1.6 x 0.5 (mm) GPS & WiFi (B.T.) Combo Ceramic Chip Antenna (AA089) Engineering Specification		DOCUMENT	H2U94W1H1G0300		REV.
		NO.			G

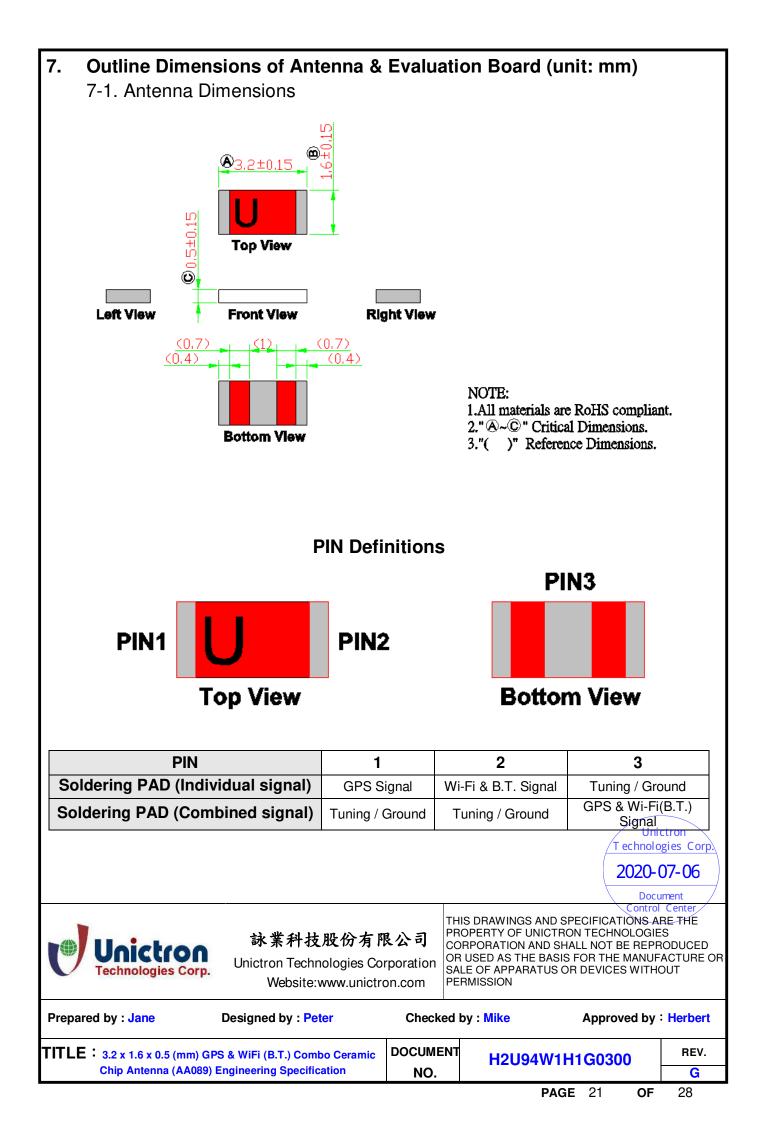


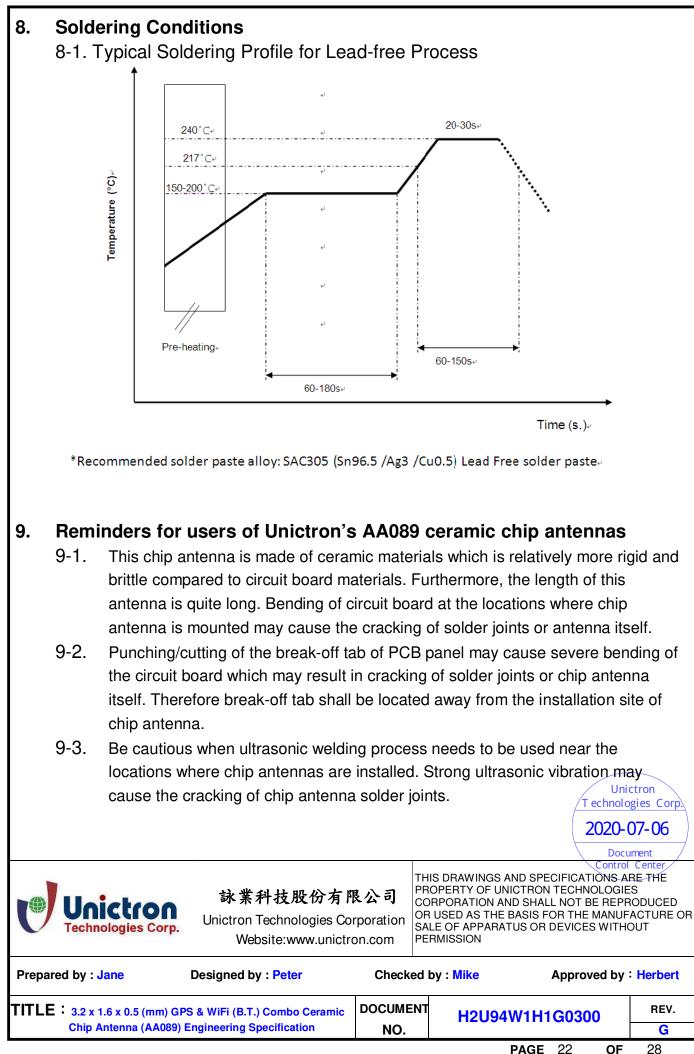


PAGE 22 OF

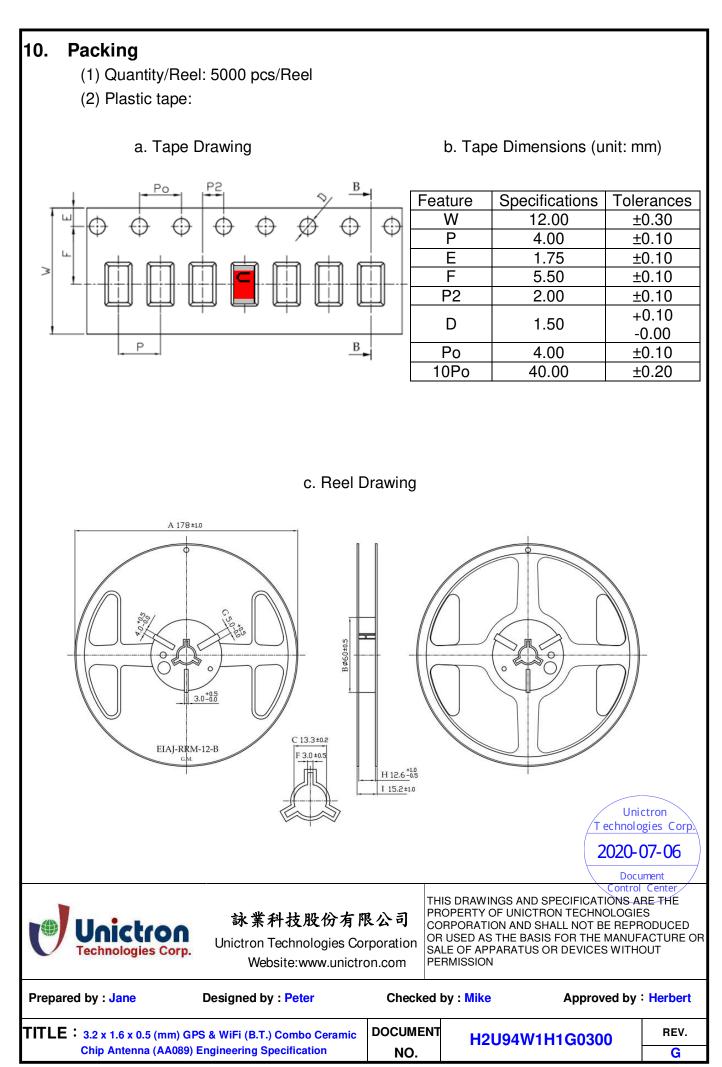

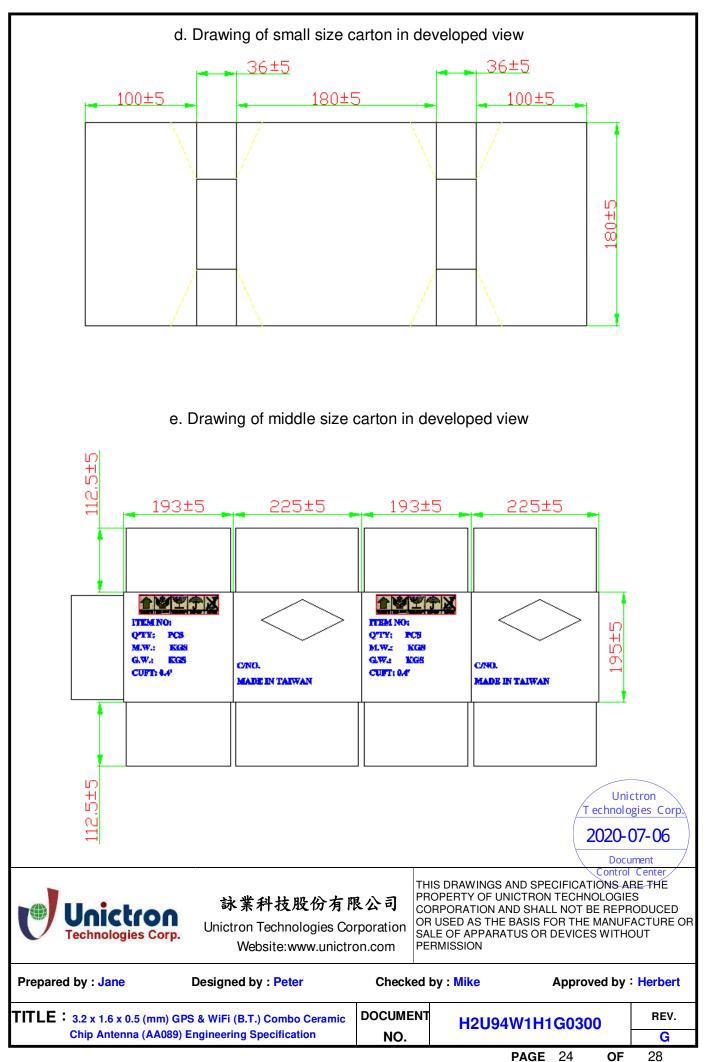

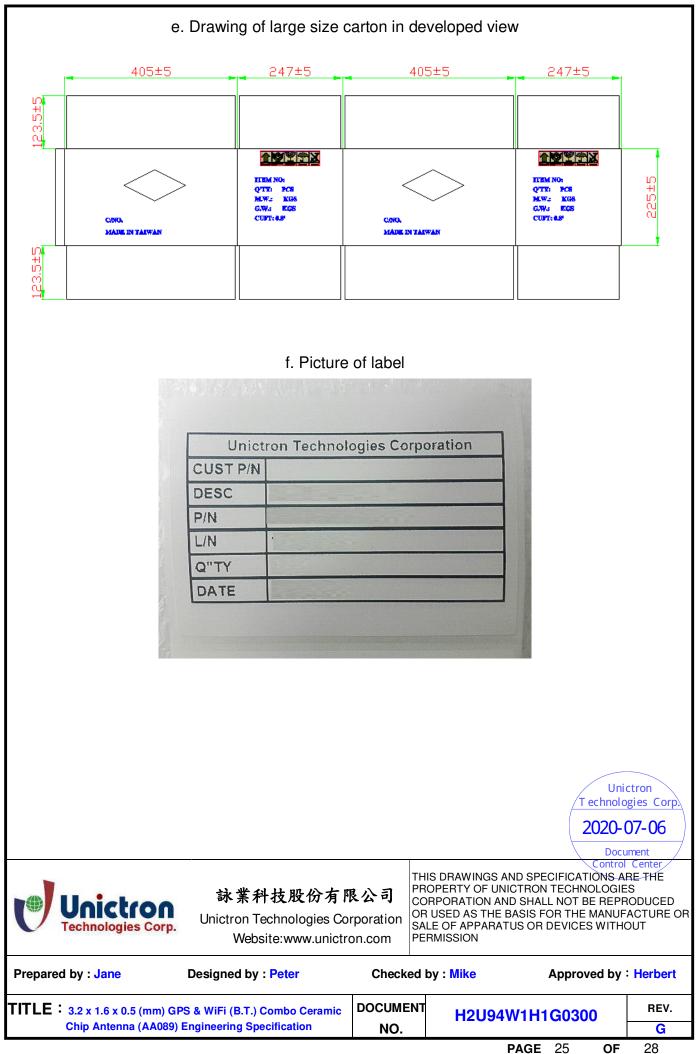

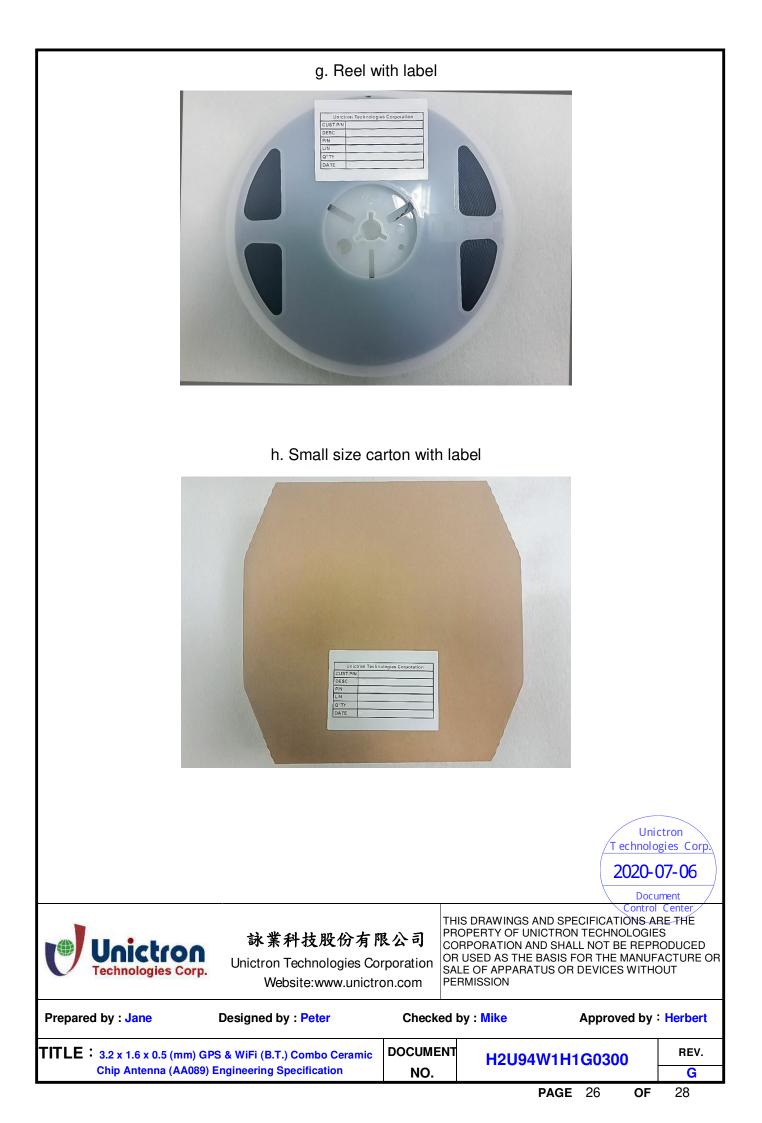



11. Operating & Storage Conditions

- 11-1. Operating
 - (1) Maximum Input Power: 2 W
 - (2) Operating Temperature: -40 $^\circ\!\mathrm{C}$ to 85 $^\circ\!\mathrm{C}$

11-2. Storage

- (1) Storage Temperature: $-5^{\circ}C$ to $40^{\circ}C$
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

