

5-104078-2 ✓ ACTIVE

AMPMODU | AMPMODU System 50


TE Internal #: 5-104078-2

PCB Mount Receptacle, Vertical, Board-to-Board, 40 Position, 1.27 mm [.05 in] Centerline, Gold, Through Hole - Solder, Signal, AMPMODU System 50

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

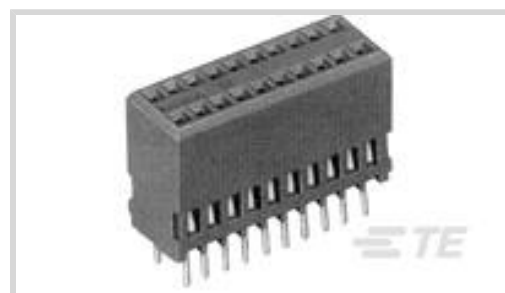

PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **40**

Number of Rows: **2**

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type | PCB Mount Receptacle |
| Connector System | Board-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|------------------------------|----------------------|
| PCB Mount Orientation | Vertical |
| Number of Positions | 40 |
| Number of Rows | 2 |
| Board-to-Board Configuration | Orthogonal, Parallel |

Electrical Characteristics

| | |
|-----------------------|-----------------|
| Insulation Resistance | 5000 M Ω |
| Operating Voltage | 30 VAC |

Body Features

| | |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

| | |
|---|----------------------------|
| Mating Square Post Dimension | .38 mm[.015 in] |
| PCB Contact Termination Area Plating Material Thickness | 3.81 μ m[150 μ in] |
| Contact Layout | Matrix |



| | |
|--|--|
| PCB Contact Termination Area Plating Material | Tin |
| Contact Base Material | Copper Alloy |
| Contact Mating Area Plating Material | Gold |
| Contact Mating Area Plating Material Thickness | .03 μm [1.18 μin] |
| Contact Type | Receptacle |
| Contact Current Rating (Max) | 3.6 A |

Termination Features

| | |
|---|-----------------------|
| Rectangular Termination Post & Tail Thickness | .4 mm[.016 in] |
| Rectangular Termination Post & Tail Width | .2 mm[.008 in] |
| Termination Post & Tail Length | 2.54 mm[.1 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|----------------|
| PCB Mount Retention Type | Hold-Down Post |
| Mating Alignment | With |
| Mating Alignment Type | Polarization |
| PCB Mount Retention | Without |
| PCB Mount Alignment | Without |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|------------------------------|
| Centerline (Pitch) | 1.27 mm[.05 in] |
| Housing Material | Liquid Crystal Polymer (LCP) |

Dimensions

| | |
|-----------------------------|-------------------|
| Connector Length | 26.52 mm[1.04 in] |
| Connector Height | 8.89 mm[.35 in] |
| Connector Width | 5.03 mm[.198 in] |
| Row-to-Row Spacing | 2.54 mm[.1 in] |
| Stack Height | 11.43 mm[.45 in] |
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|------------------------|----------------|
| Solder Process Feature | Board Standoff |
|------------------------|----------------|



Circuit Application

Signal

Industry Standards

| | |
|------------------------|-----------------------|
| Agency/Standard | UL |
| Approved Standards | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|------|
| Packaging Quantity | 20 |
| Packaging Type | Tube |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts




Also in the Series | **AMPMODU System 50**



Customers Also Bought

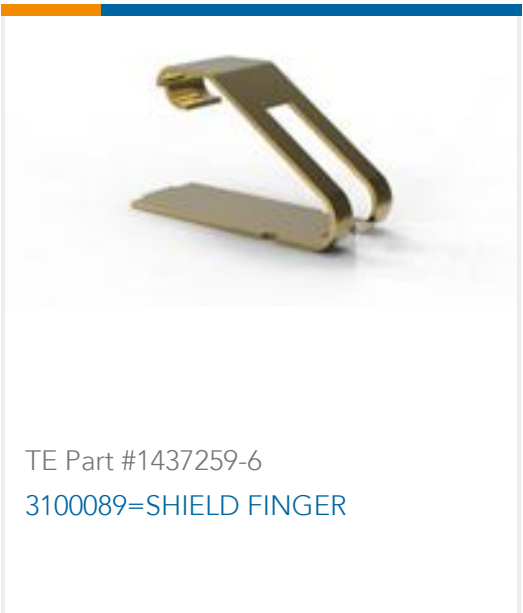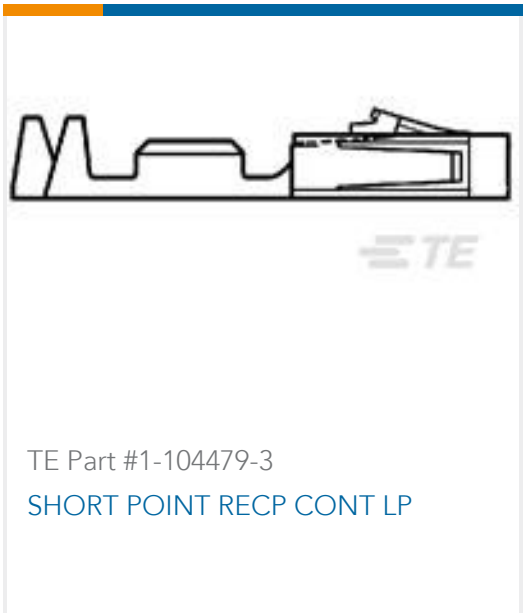


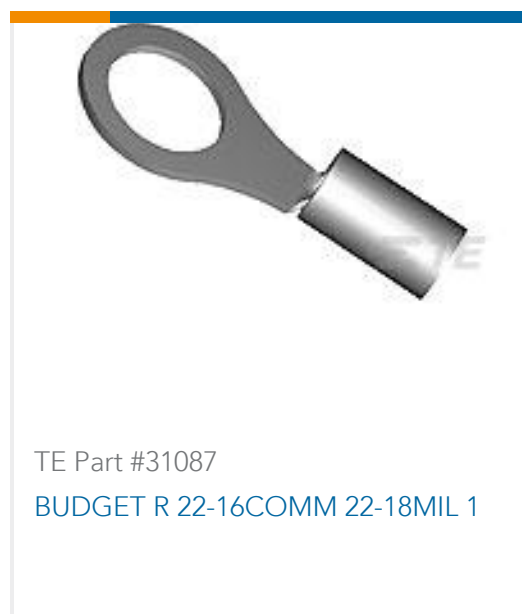

TE Part #31087
BUDGET R 22-16COMM 22-18MIL 1



TE Part #6609049-1
3VQ1=F7265 S0

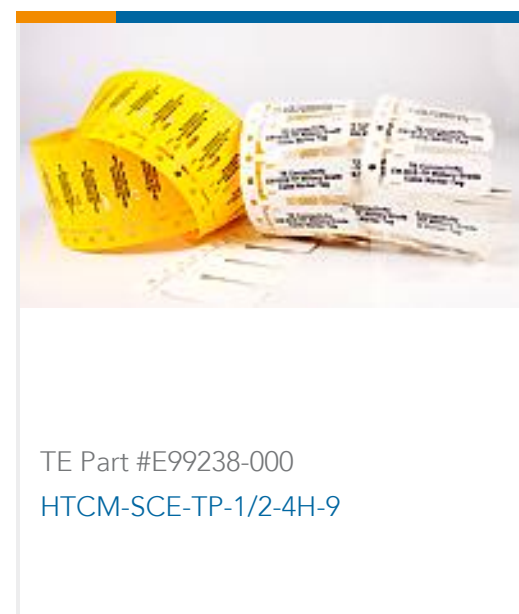

TE Part #E99238-000
HTCM-SCE-TP-1/2-4H-9



TE Part #YDTS20W19-35PNV001
RECP ASSY



TE Part #390088-1
BLACK HSG WITH 30AU CONTACT

Documents

Product Drawings

[40 SYSTEM 50 RCPT ASSY DRST SN](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_5-104078-2_AA.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104078-2_AA.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-104078-2_AA.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPMODU_INTERCONNECTION_SYSTEM_SECTION3AND4](#)

English

[AMPMODU SYSTEM 50 QUICK REFERENCE GUIDE](#)

English

[AMPMODU SYSTEM 50](#)

English

Product Specifications



Application Specification

English

Product Environmental Compliance

TE Material Declaration

English