

SAW Filter 159.0125MHz
Part No: MA04627

Model: TA0289A
Rev No: 2

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC voltage: 5V
3. Operating Temperature: -25°C to +70°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	159.0125	-
Insertion Loss IL min (reference level)	dB	-	1.85	2.8
Bandwidth BW -3dB	MHz	6.025	8.2	-
Absolute Attenuation (reference to IL min dB)				
Fc -50 ~ Fc -30MHz	dB	42	57	-
Fc -30 ~ Fc -15MHz	dB	36	43	-
Fc +30 ~ Fc +50MHz	dB	42	57	-
Source impedance Z _S	Ω	-	50	-
Load impedance Z _L	Ω	-	50	-

Note:

IL min is the minimum of the pass band attenuation. The center frequency Fc is the mean value of the upper and lower frequencies at the 3dB filter attenuation level relative to the IL min.

C. MEASUREMENT CIRCUIT:


HP Network analyzer

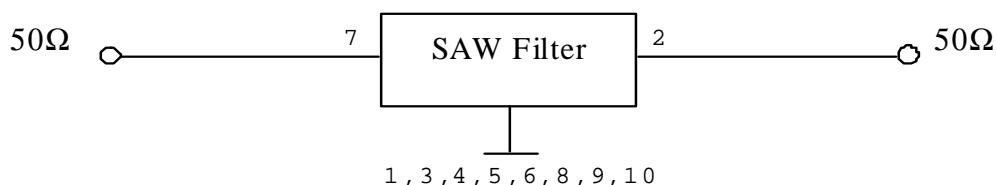


SAW Filter 159.0125MHz
Part No: MA04627

Model: TA0289A
Rev No: 2

D. OUTLINE DRAWING:

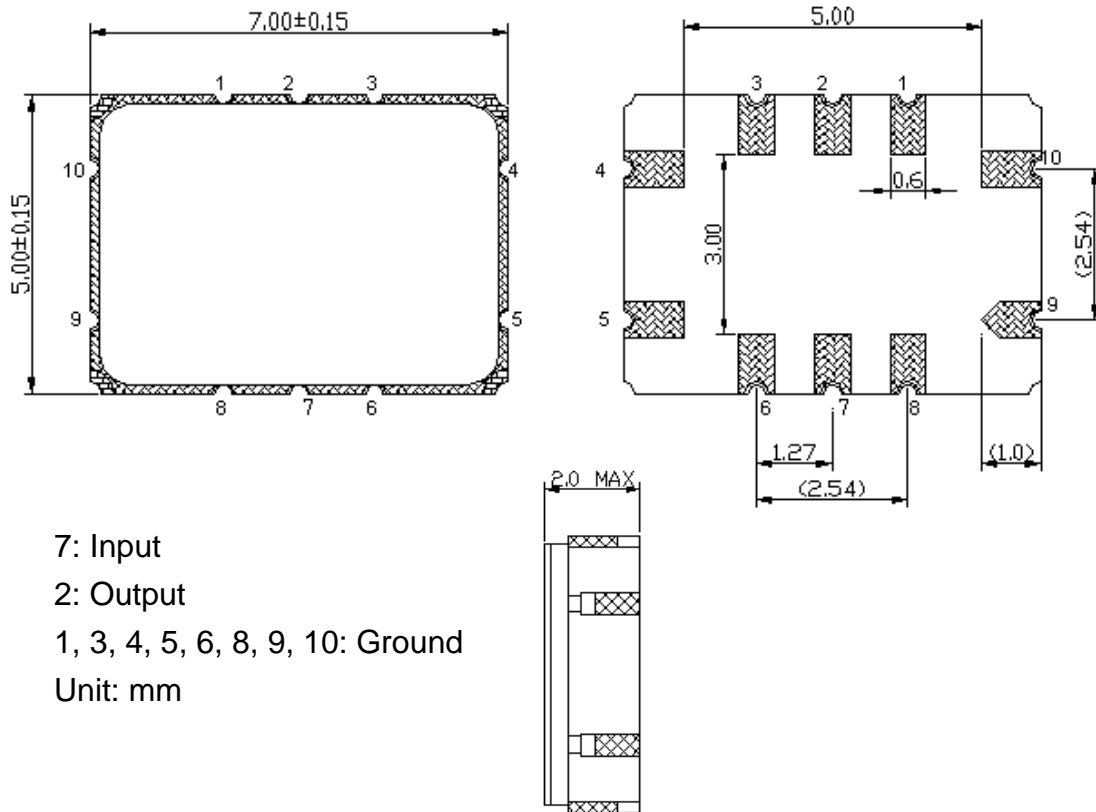


E. PCB FOOTPRINT:

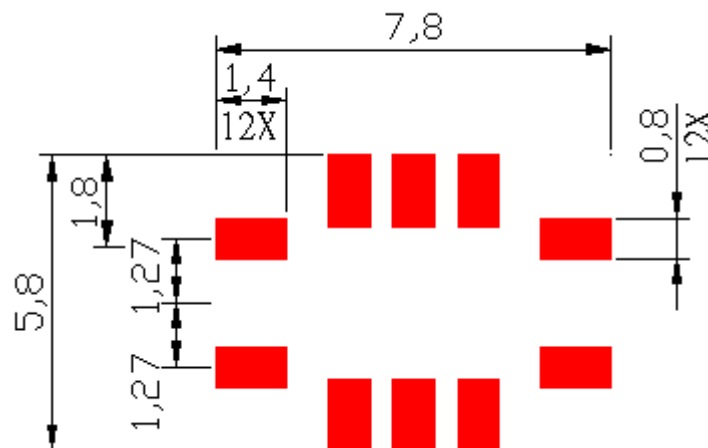

SAW Filter 159.0125MHz
Part No: MA04627

Model: TA0289A
Rev No: 2

F. FREQUENCY CHARACTERISTICS:

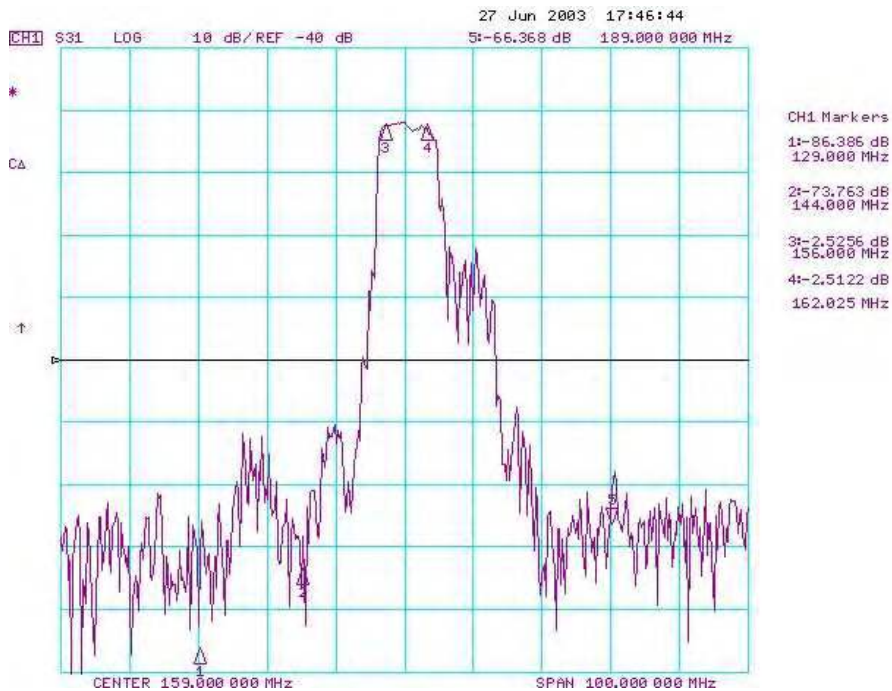


SAW Filter 159.0125MHz
Part No: MA04627


Model: TA0289A
Rev No: 2

G. PACKING:

1. REEL DIMENSION

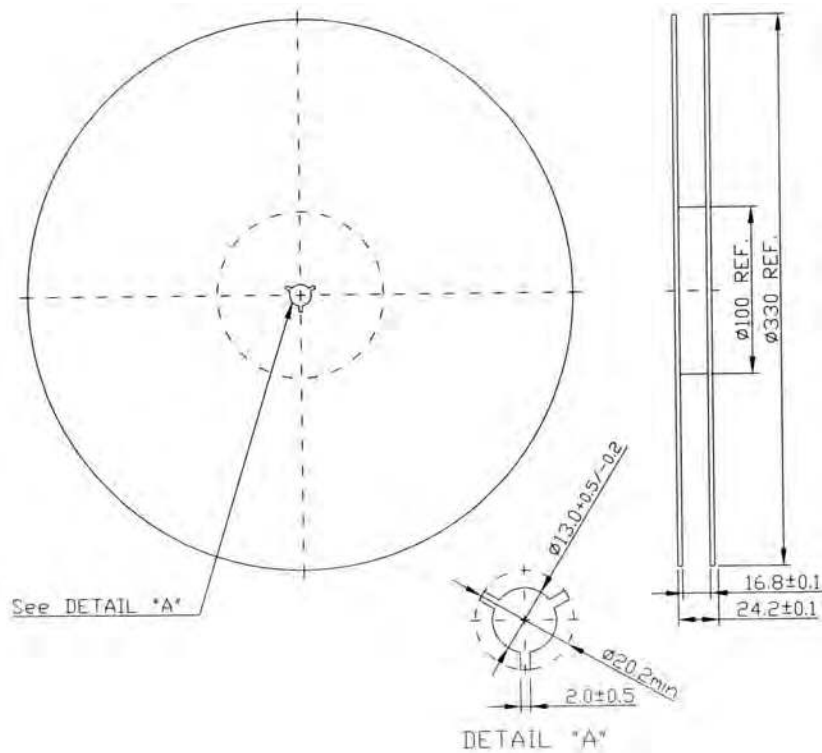

2. TAPE DIMENSION

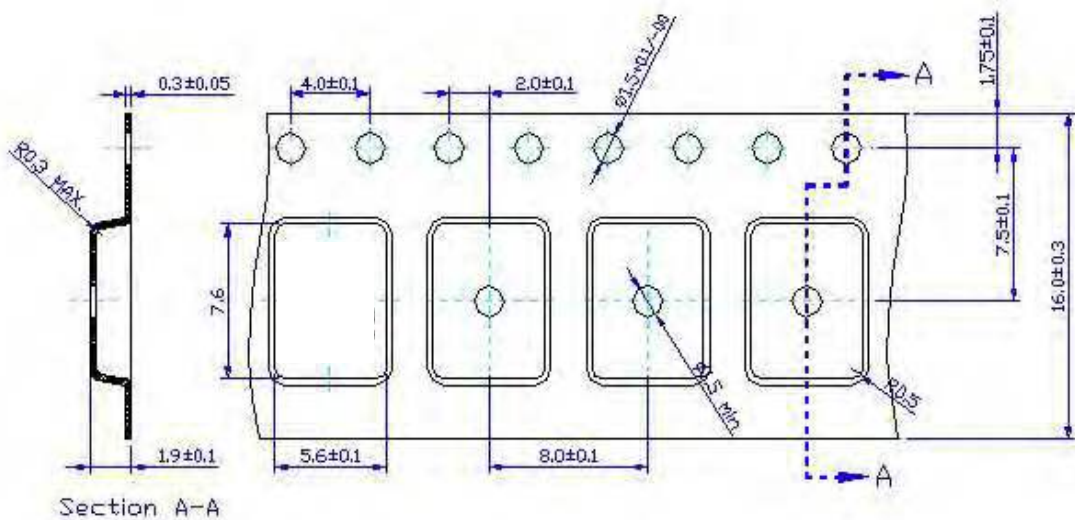

SAW Filter 159.0125MHz
Part No: MA04627

Model: TA0289A
Rev No: 2

H. RECOMMENDED REFLOW PROFILE:

