

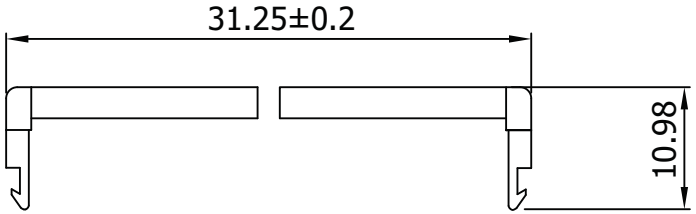

SR

I.D.C SOCKET DUAL-ROW

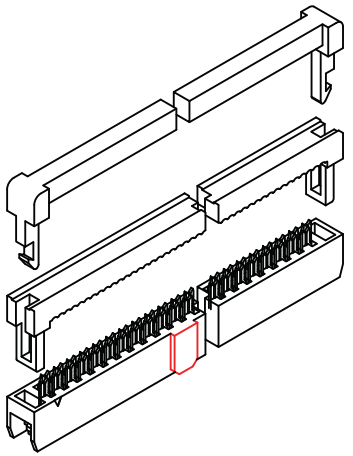

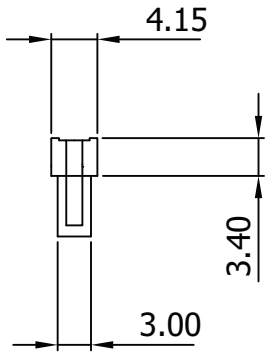

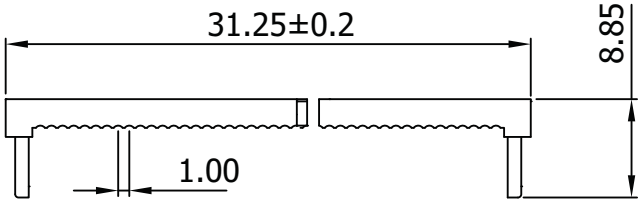

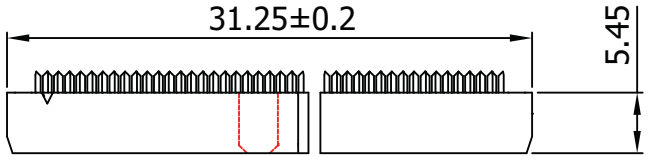



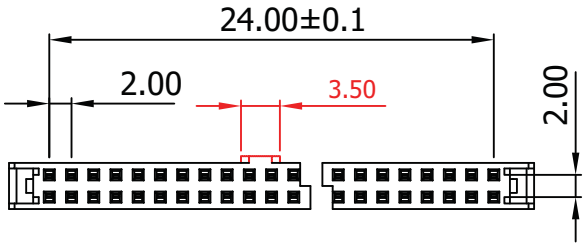

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp DC
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM±0.30MM

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

Item No. **AWP2-26-7241-T-R**

Title IDC-Socket - 2.00MM Pitch, Gold Flash, Central Lug w/Strain Relief, 26 Contacts

Drawing No. **rev00**

Replace | Sheet

RoHS Complaint

ASSMANN WSW components