


Model 1383
BNC Male to Right Angle
BNC Male

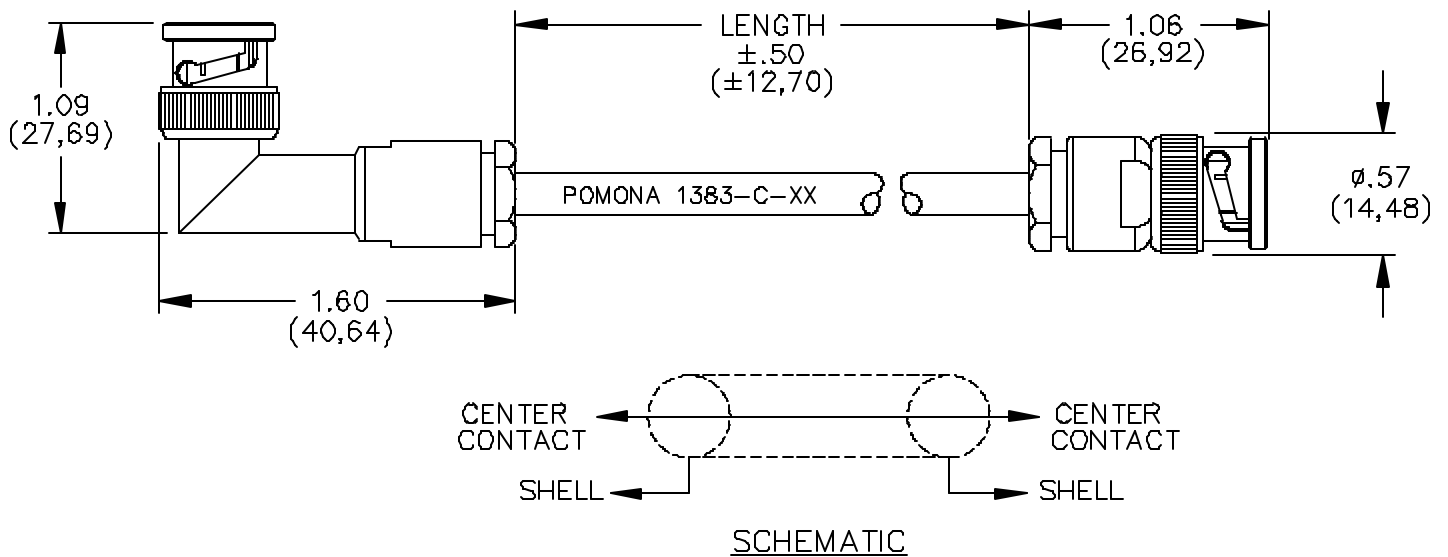

FEATURES:

- Right Angle BNC Provided for Easy Access
- Lengths other than those specified are available upon request.

MATERIALS:

Conn: 1st End – Right Angle BNC Male.
 Body and Fittings: Tarnish Resistant.
 Center Contact: Gold Plated per MIL-C-39012.
 Cable: RG58C/U. (.195) O.D.
 50 Ohms Impedance
 Marking: “POMONA 1383-C-XX”.

Conn: 2nd End-BNC Male.
 Body Fittings: Non-tarnish finish.
 Center Contact: Gold Plated per MIL-C-39012.

RATINGS: Entire Assembly

Operating Temperature: +50°C. (+122°F.) Max.
 Operating Voltage: Shield-Earth: 30VAC/60VDC Max.
 Inner conductor-Shield: 500 VRMS Max.

ORDERING INFORMATION: Model 1383-C-XX

XX=Cable Length, Standard Lengths: 18” (457), 24” (610), 36” (914), 48” (1219), 60” (1524)

Ordering Example: 1383-C-60 indicates 60” (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies. Made in USA

6/9/99
 SY/EH/LS
 S:\Engineering\Release\DataSheets\FI\ukeDataSheet\1383_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90541 (800) 444-6785 or (425) 446-6010
 More drawings available at www.pomonaelectronics.com