


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		W	ECO-06-029064	14DEC06	MB	JG
			W1	REVISED PER ECO-09-020689	25AUG09	KK	AEG

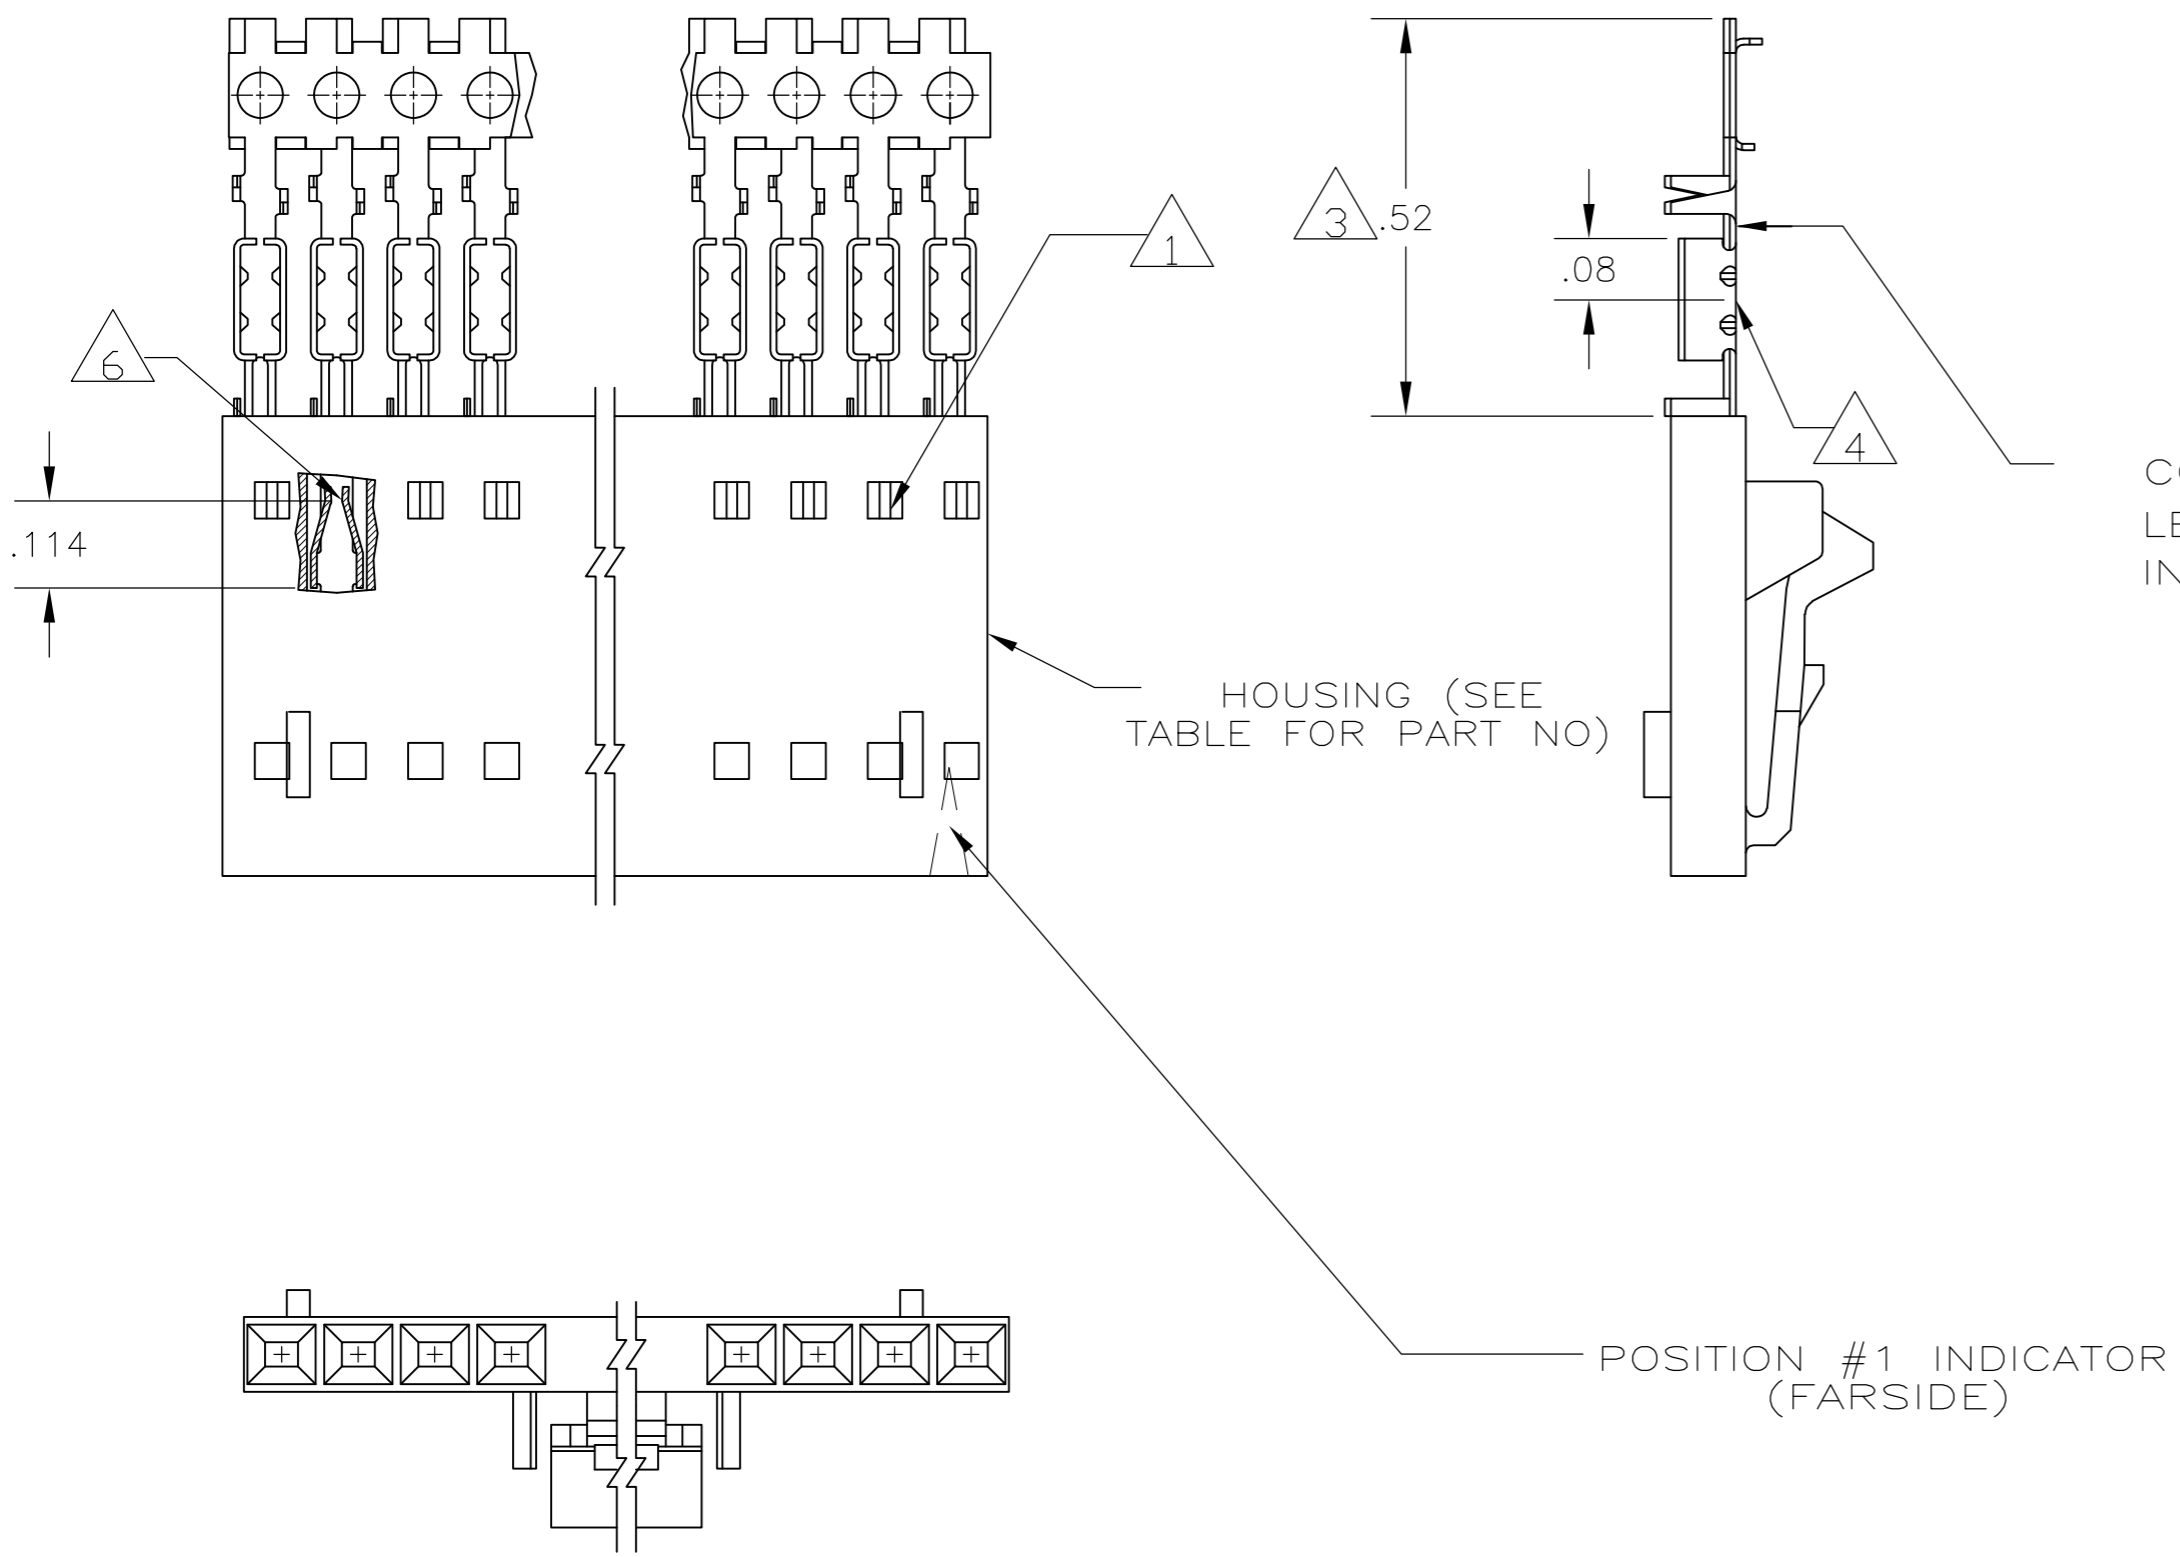

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER	
8	2-104257-4	25	7-103734-4	
	2-104257-3	24	7-103734-3	
	2-104257-2	23	7-103734-2	
	2-104257-1	22	7-103734-1	
	2-104257-0	21	7-103734-0	
	1-104257-9	20	6-103734-9	
	1-104257-8	19	6-103734-8	
	1-104257-7	18	6-103734-7	
	1-104257-6	17	6-103734-6	
	1-104257-5	16	6-103734-5	
	1-104257-4	15	6-103734-4	
	1-104257-3	14	6-103734-3	
	1-104257-2	13	6-103734-2	
	7	2-104257-4	25	2-103734-4
		2-104257-3	24	2-103734-3
		2-104257-2	23	2-103734-2
2-104257-1		22	2-103734-1	
2-104257-0		21	2-103734-0	
1-104257-9		20	1-103734-9	
1-104257-8		19	1-103734-8	
1-104257-7		18	1-103734-7	
1-104257-6		17	1-103734-6	
1-104257-5		16	1-103734-5	
1-104257-4		15	1-103734-4	
1-104257-3		14	1-103734-3	
1-104257-2		13	1-103734-2	
1-104257-1		12	1-103734-1	
1-104257-0		11	1-103734-0	
		104257-9	10	103734-9
	104257-8	9	103734-8	
	104257-7	8	103734-7	
	104257-6	7	103734-6	
	104257-5	6	103734-5	
	104257-4	5	103734-4	
	104257-3	4	103734-3	
	104257-2	3	103734-2	
	104257-1	2	103734-1	

SUPERSEDED BY 1-103958-1
 SUPERSEDED BY 1-103958-0
 SUPERSEDED BY 103958-9
 SUPERSEDED BY 103958-8
 SUPERSEDED BY 103958-7
 SUPERSEDED BY 103958-6
 SUPERSEDED BY 103958-5
 SUPERSEDED BY 103958-4
 SUPERSEDED BY 103958-3
 SUPERSEDED BY 103958-2
 SUPERSEDED BY 103958-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103958
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 FINISH: CONTACTS- .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 FINISH: CONTACTS- .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN 04 NOV 1986
 L MAYER
 CHK 11-12-86
 P. DE JONG
 APVD 11-12-86
 P. DE JONG
 PRODUCT SPEC
 108-25034
 APPLICATION SPEC
 114-25026
 WEIGHT -
 CUSTOMER DRAWING

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± .02
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± -
 FINISH SEE TABLE

Tyco Electronics Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME RCPT ASSY, AMPMODU MTE, SINGLE
 , LATCHED & POLARIZED,
 FOR #22-#26 AWG WIRE SIZE

SIZE A2 CAGE CODE 00779 DRAWING NO. 103734 RESTRICTED TO -
 SCALE 4:1 SHEET 1 OF 1 REV W1