
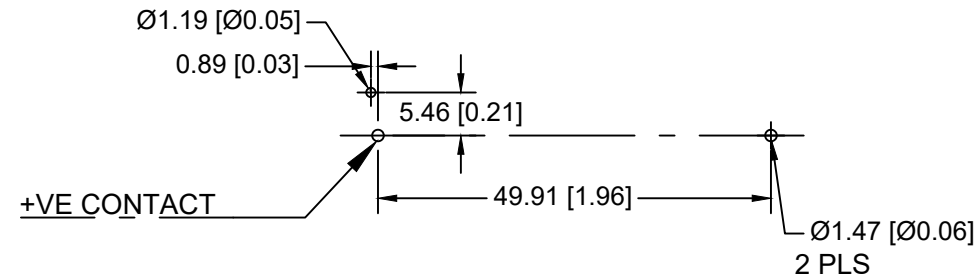
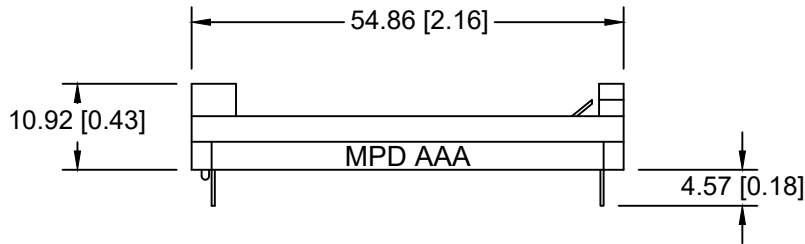


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/27/19	A	Updated note to "ROHS COMPLIANT"	T.B.	B.S.	



PCB LAYOUT

SPECIFICATION:

HOUSING : BLACK POLYPROPYLENE


FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C

CONTACTS: NICKEL PLATED STAINLESS STEEL, TYPE 301, SPRING TEMPER

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title ONE "AAA" CELL SPRINGLESS HOLDER		
Angular ± 3°	Date 02/27/19	Drawing Number BA1AAAPC	