

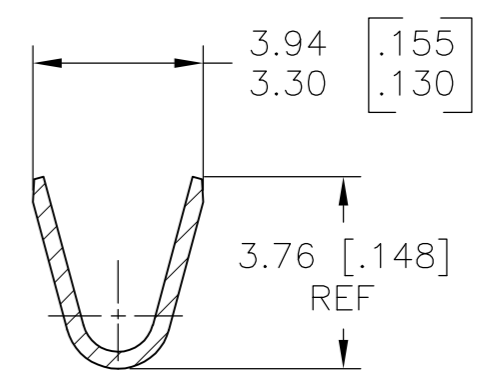
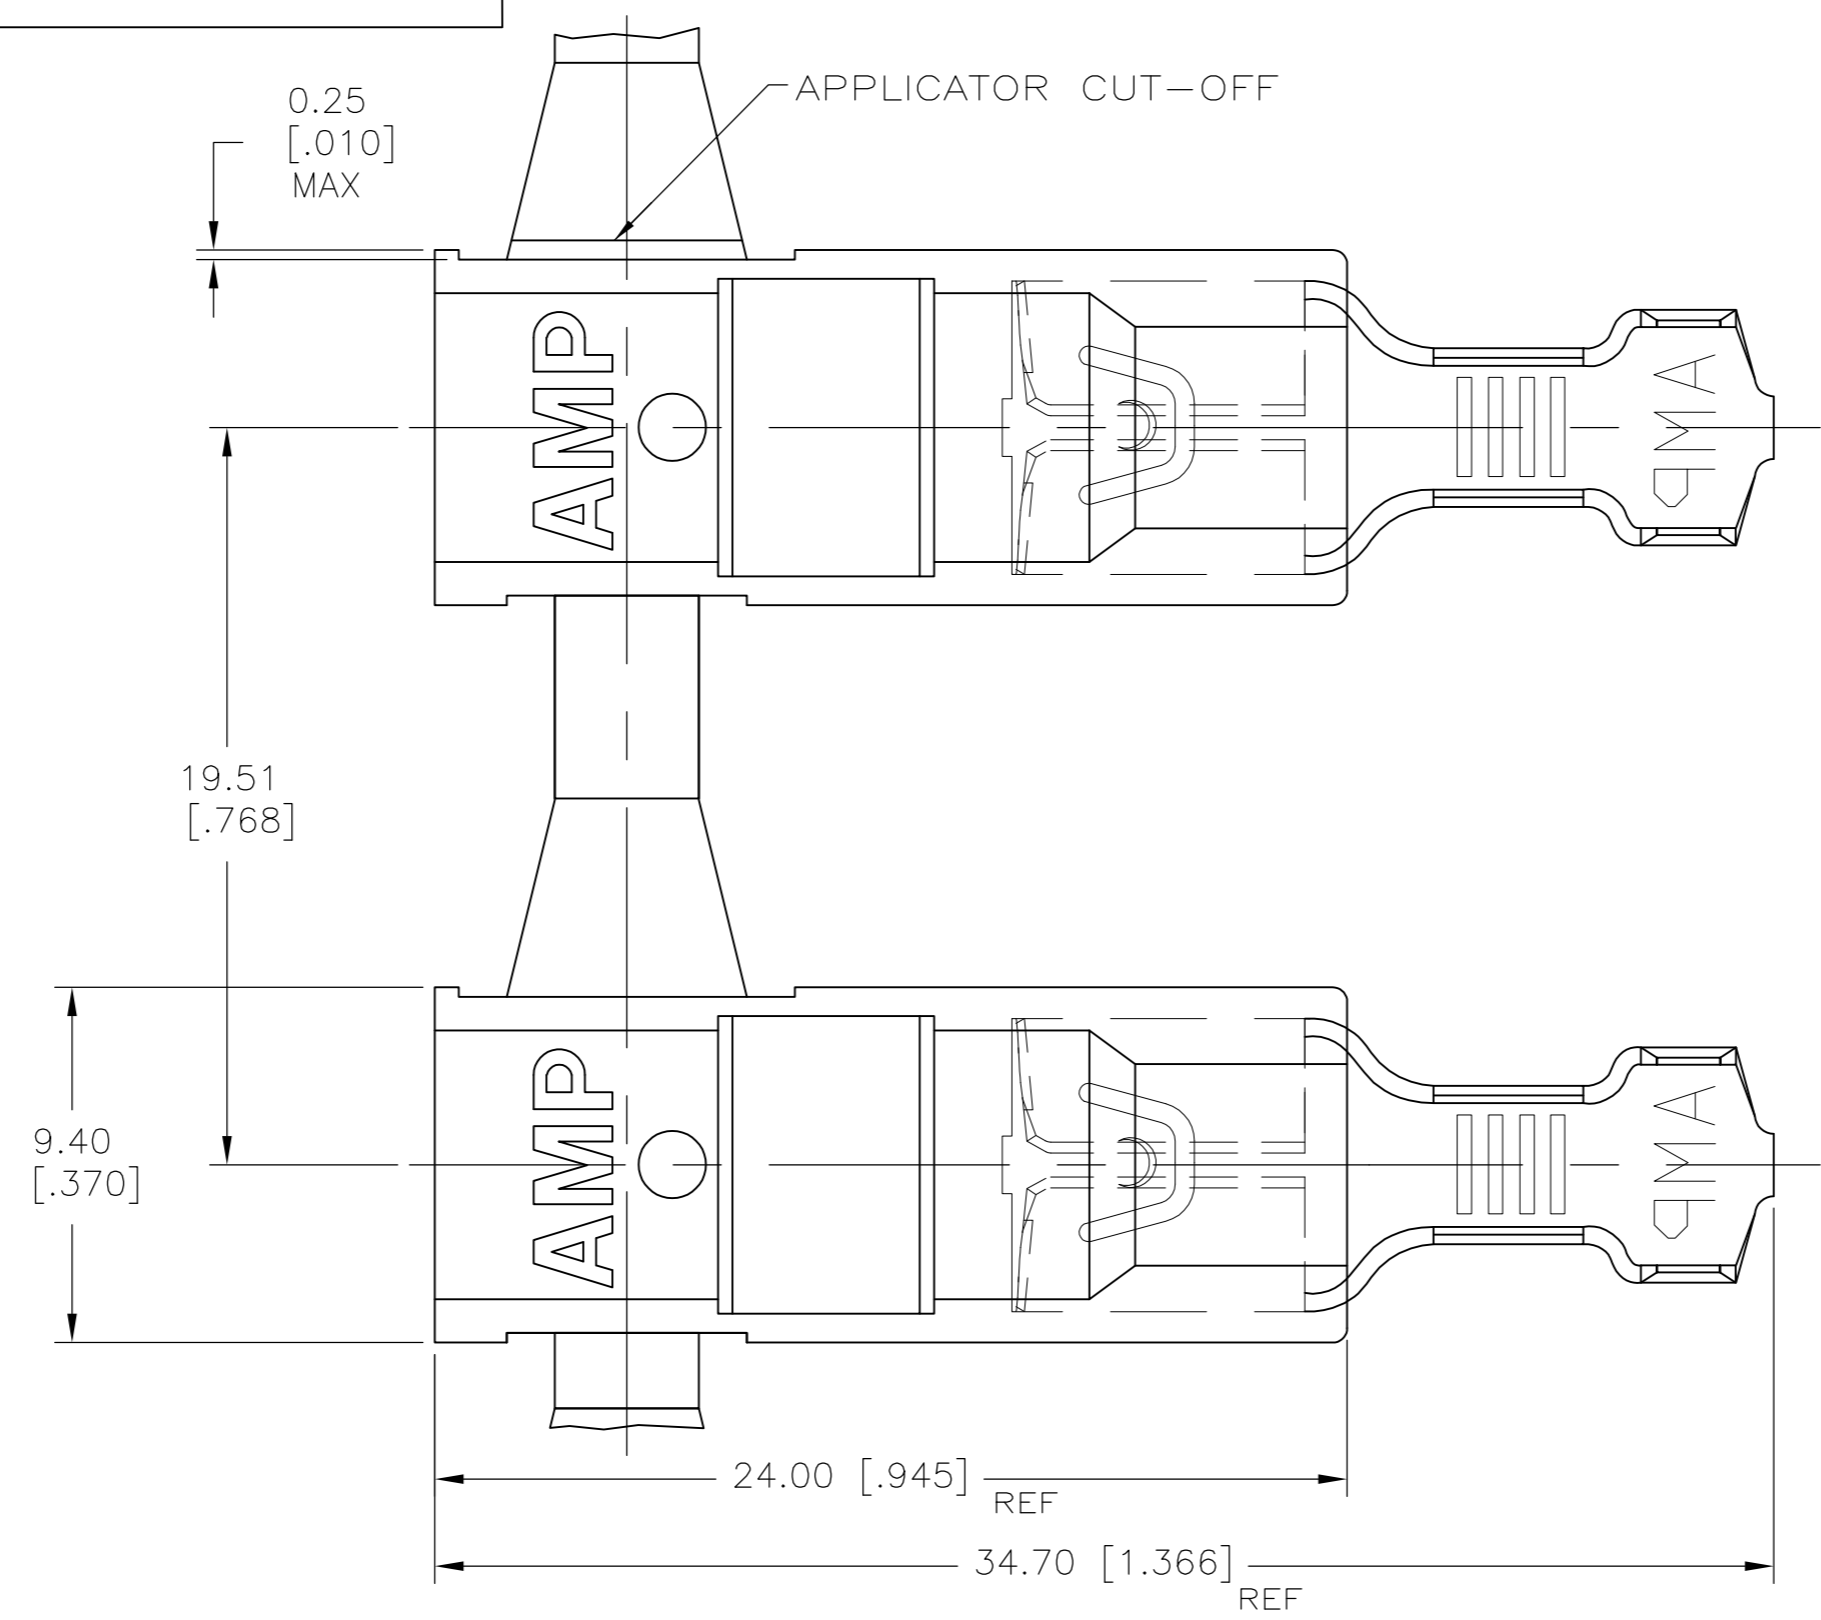


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	A1	RELEASED PER ECO 13-019833	18DEC13	JR PD

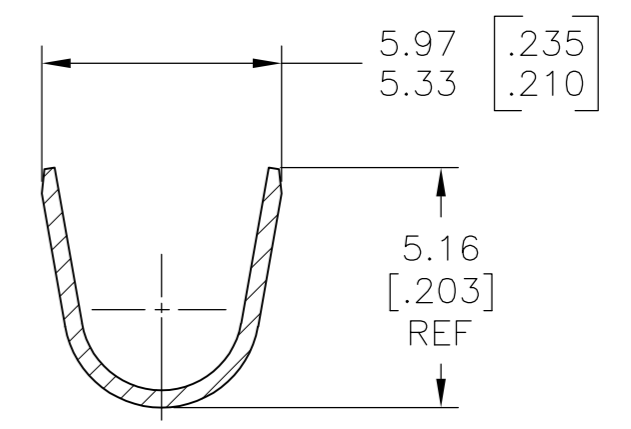

SECTION A-A

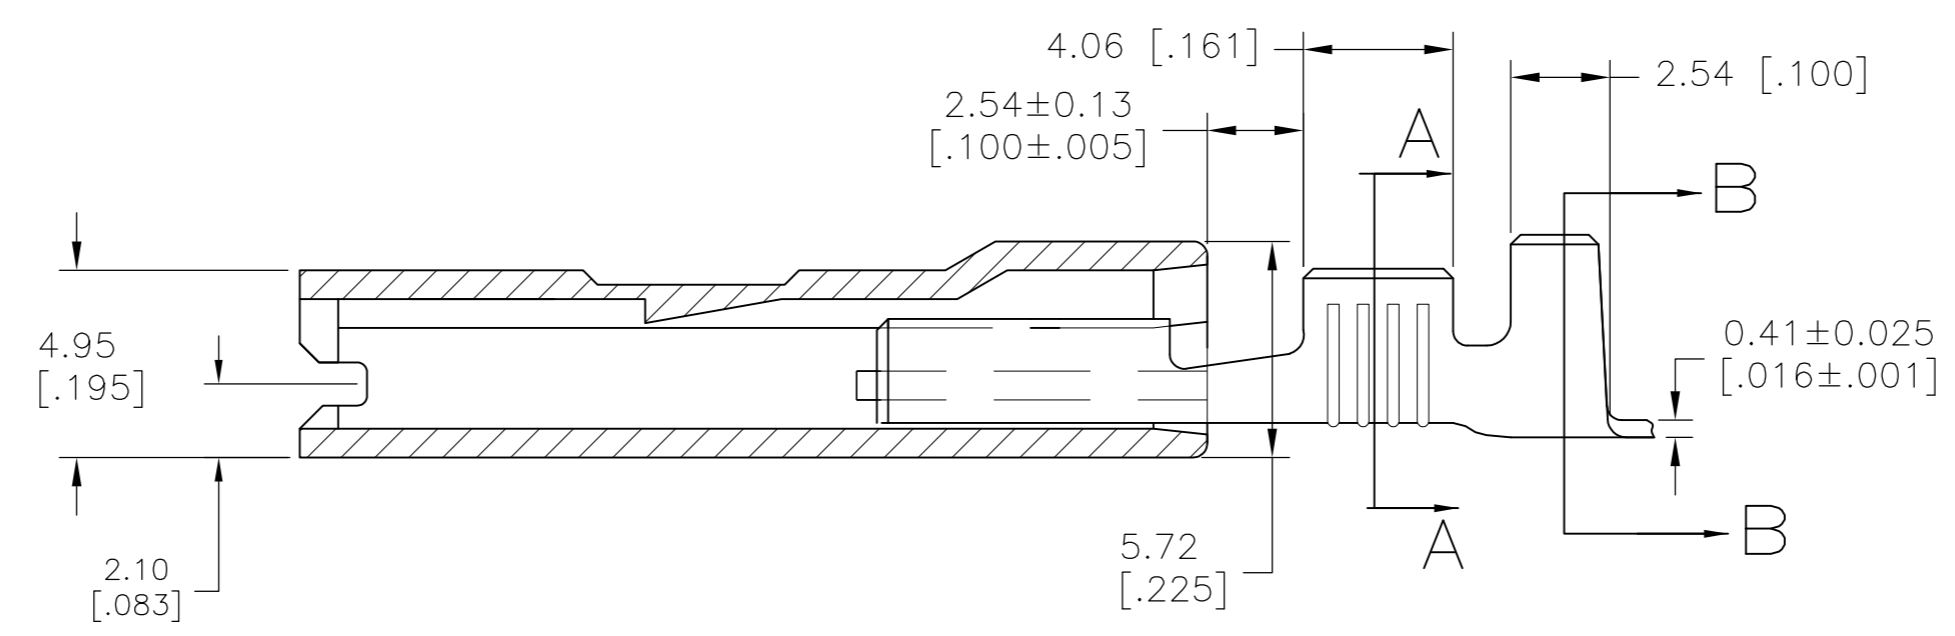

SECTION B-B

- 1 LOW-INSERTION FASTON TERMINAL, BASE P/N 1742198-2, IS USED IN THIS PRODUCT.
- 2 MATING TAB THK IS 0.813±0.025 [.032±.001].
- 3 WIRE SIZE IS 0.8-2.0mm² [18-14] AWG.
- 4 INSULATION RANGE IS 3.05-4.32 [.120-.170] DIA.

STANDARD	VO NYLON 66, 150°C NATURAL (WHITE)	H02 STEEL / 0.00381 [.000150] MIN NICKEL	1969447-1
PACKAGING	HOUSING	TERMINAL	PART NO
	MATERIAL / FINISH		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19JUL11 JR RUTH	
DIMENSIONS: mm [INCHES]		CHK 19JUL11 RAY LANDON	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 19JUL11 RAY LANDON	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.25 [.010] 4 PLC ± - ANGLES ± -		PRODUCT SPEC	
MATERIAL	SEE TABLE	FINISH	SEE TABLE
MATERIAL		WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
SEE TABLE		SEE TABLE	A2 00779 C=1969447 -
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1 REV A1