




	REVISIONS								
REV ECO DESCRIPTION DATE BY APP									
A3 - RELEASE NEW DWG FORMAT 18/JUN/13 JA					-				

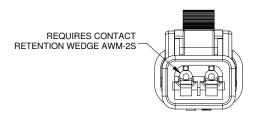



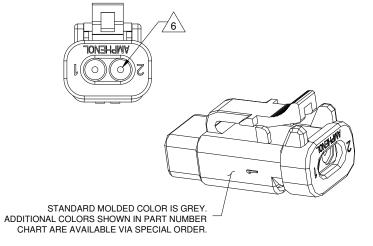

PLUG, 2 SOCKET, END CAP, ATM SERIES

DWG NO:

ATM06-2S-EC01XX REV: A3 SH: 1


## NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

- 2. MODIFICATIONS: END CAP
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 7.5 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE: IP67 ( MATED CONDITION )
  - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATM04-2P\* RECEPTACLE. (\* = MODIFICATIONS AND/OR COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
20	1.35 mm (.053 in)	3.05 mm (.120 in)	

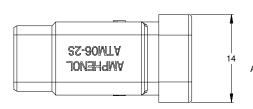

PART NUMBER CHART						
COLOR	PART NUMBER					
GREY	ATM06-2S-EC01					
BLACK	ATM06-2S-EC01BK					
BLUE	ATM06-2S-EC01BL					
BROWN	ATM06-2S-EC01BR					
GREEN	ATM06-2S-EC01GR					
RED	ATM06-2S-EC01RD					
WHITE	ATM06-2S-EC01WT					
YELLOW	ATM06-2S-EC01YL					

	SEE PART NU	JMBER CHART										
	PART N	PART NUMBER			DESCRIPTION			ITEM	]-			
QUANTITY		MA	TEF	<b>RI</b> /	<b>ALS</b>	S LI	ST					╊
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1) PL DEC 40.30   Fractions +1/64				NTE IUN/13		Α	m	phe	en	ol		
2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference	Angles ±1"	CHECKED:  ENGINEER:  APPROVAL:			Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036							
MATERIAL SPECIFICATIONS:		CUSTOMER:			PL	.UG, 2	SOCKE	T,END C	AP, AT	M SER	IES	
PROCESS SPECIFICATIONS:  NEXT ASSY:		THIS DRAWING IS SUPPL INFORMATION ONLY. DE SPECIFICATIONS AND PE SHOWN HEREON ARE THE THE AMPHENOL CORPOI OF REPRODUCTION ARE DIMENSIONS ARE SUBJE MANUFACTURING VARIA	SIGN FEATUR ERFORMANCI IE PROPERT RATION, NO F IMPLIED, ALI ICT TO NORM	E DATA Y OF RIGHTS L IAL	SIZE B SCALE:N	C-	DWG NO:	TM06-2	S-EC(	)1XX 1 •	A3	

## **ATM Series** $^{\text{TM}}$ - Contact Size 20 Options

Machined Contacts, Sockets & Pins							
Part Number	Description	Size	AWG	Туре			
AT60-010-2031	Male Contact - Pin, Gold-plated	20	16-18	Machined			
AT62-005-20141	Female Contact - Socket, Gold-plated	20	16-18	Machined			
AT60-010-20141	Male Contact - Pin, Nickel-plated	20	16-18	Machined			
AT62-005-2031	Female Contact - Socket, Nickel-plated	20	16-18	Machined			
AT60-202-2031	Male Contact - Pin, Gold-plated	20	20-22	Machined			
AT62-201-2031	AT62-201-2031 Female Contact - Socket, Gold-plated		20-22	Machined			
AT60-202-20141 Male Contact - Pin, Nickel-plated		20	20-22	Machined			
AT62-201-20141	Female Contact - Socket, Nickel-plated	20	20-22	Machined			

Tooling - Machined Contacts					
Part	Part Number	Description			
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)			
53	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)			

Contact Removal Tools							
Part	Part Number	Description					
3	ATRT-100	Used for removal of contacts for A Series™ products					
	AT11-240-2005	Contact Removal Tool, Plastic, Size 20					

Sealing Plugs						
Part	Part Part Number Description					
4	AT13-204-2005	Sealing Plug, Size 20, White				
1	AT13-204-2005-SR	Sealing Plug, Size 20, SR01 Series, Black				
/	ATM13-217-2005	Locking Sealing Plug, Size 20, Grey				
/	ATM13-217-2005-SR	Locking Sealing Plug, Size 20, SR01 Series, Blue				

Stamped & Formed Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Туре		
AT60-20-0144	Male Contact - Pin, Gold-plated	20	16-22	Stamped & Formed		
AT62-20-0144	Female Contact - Socket, Gold-plated	20	16-22	Stamped & Formed		
AT60-20-0244	Male Contact - Socket, Gold-plated	20	16-22	Stamped & Formed		
AT62-20-0244	Female Contact - Socket, Gold-plated	20	16-22	Stamped & Formed		
AT60-20-0122	Male Contact - Pin, Nickel-plated	20	16-22	Stamped & Formed		
AT62-20-0122	Female Contact - Socket, Nickel-plated	20	16-22	Stamped & Formed		
AT60-20-0222	Male Contact - Socket, Nickel-plated	20	16-22	Stamped & Formed		
AT62-20-0222	Female Contact - Socket, Nickel-plated	20	16-22	Stamped & Formed		
AT60-20-0277	Male Contact - Socket, Tin-plated	20	16-22	Stamped & Formed		
AT62-20-0277	Female Contact - Socket, Tin-plated	20	16-22	Stamped & Formed		
AT60-20-0422	Male Contact - Socket, Nickel-plated	20	20-22	Stamped & Formed		
AT62-20-0444	Female Contact - Socket, Gold-plated	20	20-22	Stamped & Formed		

	Tooling - Stamped & Formed Contacts					
Part	Part Number	Description				
	MFX-3974	Crimp Die - Size 20 (S&F contacts only)				
	MFX-3976	Crimp Die - Size 20 (S&F contacts only) 20-22AWG -04XX Series				
1	MFX-3978	Crimp Die - Size 20 (S&F contacts only) 20-22AWG -02XX Series				
*	АП-20-00	Hand Crimp Tool - Size 20, 20AWG (S&F contacts only)				