THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER EC 0513-0416-03	26JAN04	BM	JG

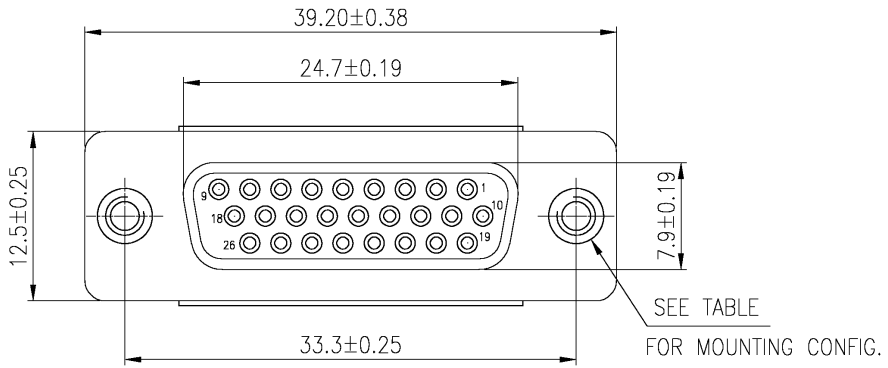

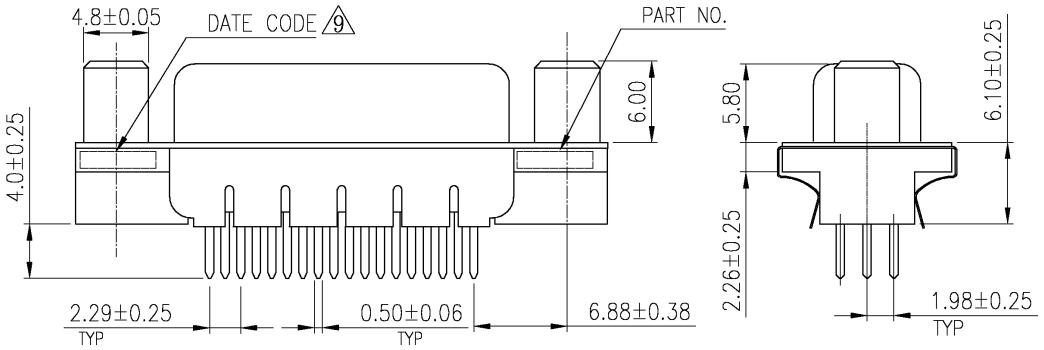

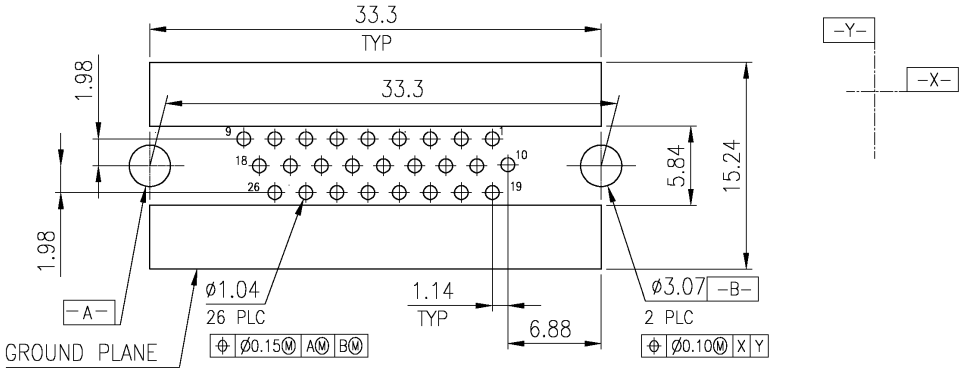

RECOMMENDED PCB LAYOUT

MATERIAL:

1. Housing: PBT , 15 % G.F polyester, Black.
   (UL 94V-0 Rated)
2. Contact: Phos. Bronze.
3. Contact Plated: Gold Plated over 50μ"
   Nickel underplate.
4. Solder Tail: Sn/Pb Plated 120μ" over 50μ"
   Nickel underplate.
5. Shell: Steel, Nickel Plated.
6. Rivet: Brass , Nickel plated 30 μ" Min.
7. Female Screwlock: Brass, Nickel plated 30μ" Min.
8. Ground Plate: SUS 302, 50μ"~150μ" Tin Plated
   Over Nickel underplate.

9 Four digit date code in this format.

01 45
Year — Manufacturing Week

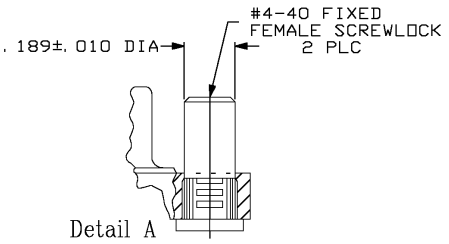

Tray	Detail A	Gold flash	786073-4
Tray	Detail A	15 μ"	786073-3
Tray	Detail A	30 μ"	786073-1
Packaging	Mounting Flange Config	Contact Finish	AMP Part NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.30
2 PLC ± 0.20
3 PLC ± 0.10
4 PLC ± –
ANGLES ± 2°

MATERIAL –
FINISH –

DWN J.BURWELL 22APR02
CHK C.CASH 22APR02
APVD –
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

Tyco Electronics Corporation
Harrisburg, Pa 17105

NAME
AMPLIMITE HD-22
26 POS RECEPTACLE, VERTICAL
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-786073	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV C

786073