

# DMM-B 13/32" x 1-3/8" and 1-1/2" 1000Vac/dc fast-acting fuses for multi-meters



**Catalog symbol / color code:**

- DMM-B
- Maroon (1000Vac/dc max voltage)

**Description:**

Fast-acting supplemental fuse for multi-meters only.

Intended to carry 100% of rated current indefinitely.

Not intended for branch circuit protection.

**Specifications:**

**Ratings**

Fuse amp range	Interrupting rating at rated voltage	Agency information	
		UL®	CSA®
44/100 and 11	*	X	-

\* DMM-B-44/100 – 10kA, 1000Vac, unity power factor and 10kA, 1000Vdc with time constant of 2.2ms. Minimum interrupt 400% of rated current at rated voltage.

DMM-B-11A – 20kA, 1000Vac, power factor ≤0.2; 20kA, 1000Vdc, time constant ≥10ms.

**Agency information**

- CE
- UL Recognized (1000Vdc, File E19180)
- RoHS compliant (DMM-B-11A only)


**Temperature specifications**

- DMM-B-44/100 - Maximum temperature 28°C in 22°C ambient temperature when carrying 100% of rated current.
- DMM-B-11A - Maximum temperature 69°C in a 22°C ambient temperature when carrying 100% of rated current.

**Catalog numbers (amps)**

DMM-B-44/100                      DMM-B-11A

**Dimensions - in:**

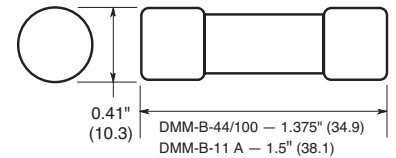

**Carton quantity**

Amps	Qty.
44/100 and 11	10


**Features:**

- Color coded for 1000Vac/dc maximum voltage rating
- Melamine tube construction
- Nickel-plated endcaps

**Typical applications**

- Multi-meters

**Time-current characteristic curves – total clearing:**

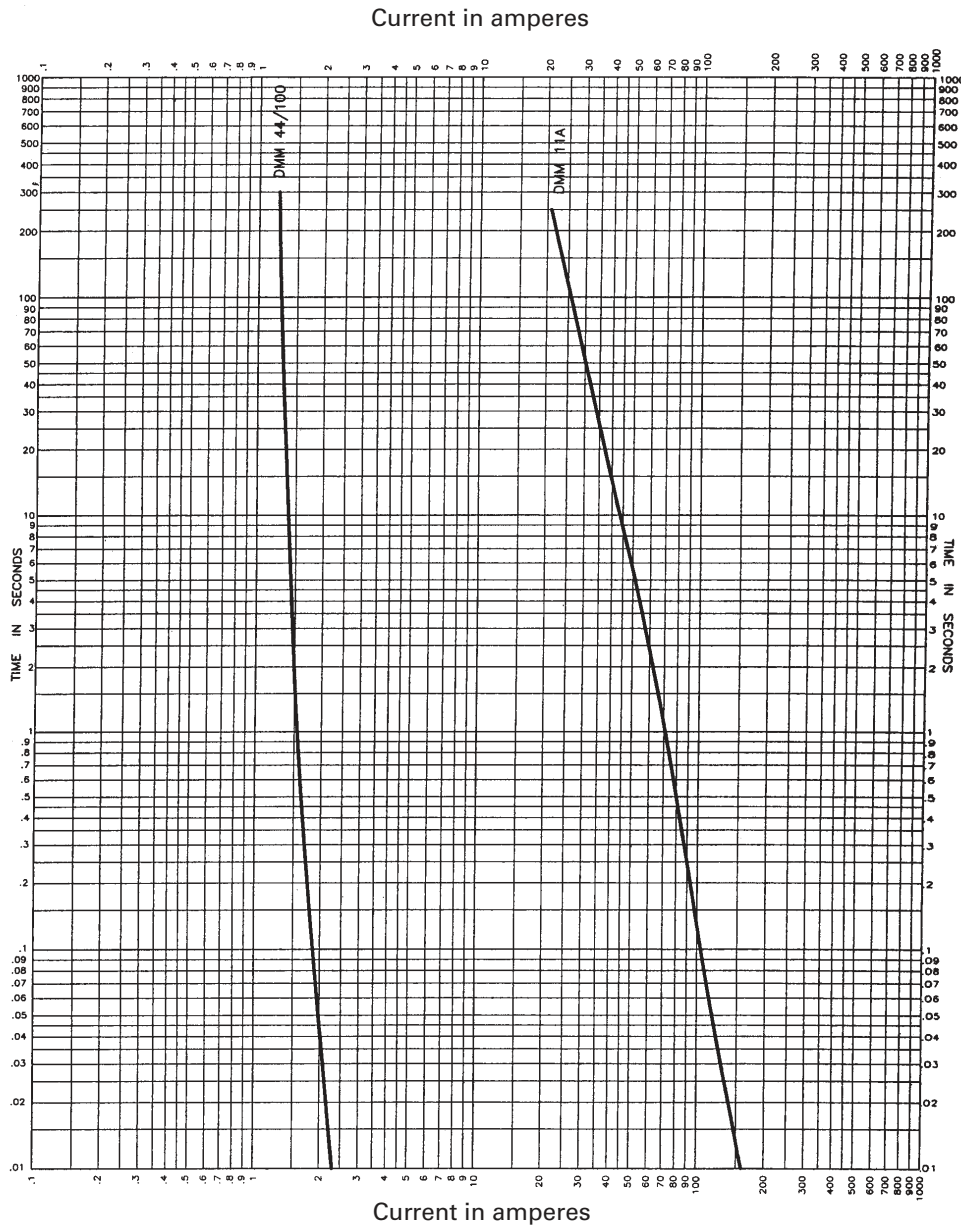

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
 1000 Eaton Boulevard  
 Cleveland, OH 44122  
 United States  
 Eaton.com

Bussmann Division  
 114 Old State Road  
 Ellisville, MO 63021  
 United States  
 Eaton.com/bussmannseries

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

For Eaton’s Bussmann series product information, call 1-855-287-7626 or visit: [Eaton.com/bussmannseries](http://Eaton.com/bussmannseries)



© 2020 Eaton  
 All Rights Reserved  
 Printed in USA  
 Publication No. 1047 - BU-SB14305  
 November 2020

CSA is a registered trademark of the Canadian Standards Group.  
 UL is a registered trademark of the Underwriters Laboratories, Inc.

Follow us on social media to get the latest product and support information.

