


ALUMINUM ELECTROLYTIC CAPACITORS


nichicon

UUB

Chip Type, High Reliability



- Chip type, high temperature range, for +125°C use.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU; (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.





UCJ Added ESR specification at -40°C **UUB** High Temperature **UUX**

■ Specifications


Item	Performance Characteristics									
Category Temperature Range	-40 to +125°C									
Rated Voltage Range	10 to 400V									
Rated Capacitance Range	1 to 330μF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current *	Rated voltage (V)	10 to 50								160 to 400
	Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA).								I = 0.04CV+100(μA) max.(1 minute's at 20°C)
Tangent of loss angle (tan δ)	Rated voltage (V)	10	16	25	35	50	160	200	250	400
	tan δ (max.)	0.32	0.24	0.21	0.18	0.18	0.30	0.30	0.30	0.30
Stability at Low Temperature	Rated voltage (V)	10	16	25	35	50	160	200	250	400
	Impedance ratio ZT / Z20 (max.)	12	8	6	4	4	8	8	8	12
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (1000 hours for φ8 × 6.2) at 125°C.					Capacitance change	Within ±30% of the initial capacitance value			
						tan δ	300% or less than the initial specified value			
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.									
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.					Capacitance change	Within ±10% of the initial capacitance value			
						tan δ	Less than or equal to the initial specified value			
Marking	Black print on the case top.									

* I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

■ Chip Type

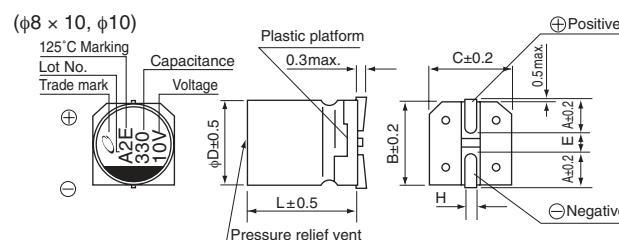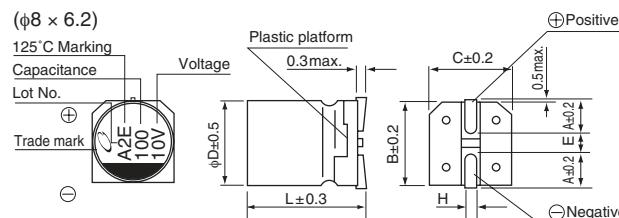

Type numbering system (Example : 10V 100μF)

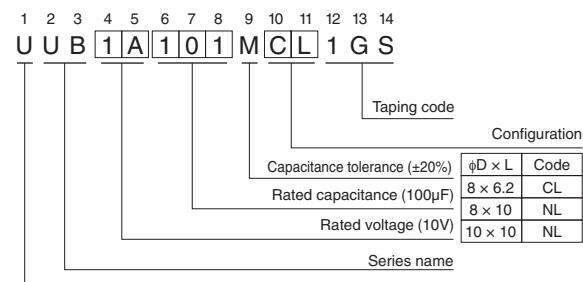

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

CAT.8100L

UUB

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D×L(mm)	$\tan \delta$	Leakage Current (μ A) (at 20°C after 1 minute)	Rated Ripple (mArms) (125°C/120Hz)	Part Number
10 (1A)	100	8×6.2	0.32	30	58	UUB1A101MCL1GS
	220	8×10	0.32	66	90	UUB1A221MNL1GS
	330	10×10	0.32	99	112	UUB1A331MNL1GS
16 (1C)	100	8×10	0.24	48	66	UUB1C101MNL1GS
	220	10×10	0.24	105.6	102	UUB1C221MNL1GS
25 (1E)	47	8×6.2	0.21	35.25	48	UUB1E470MCL1GS
	100	8×10	0.21	75	74	UUB1E101MNL1GS
	220	10×10	0.21	165	116	UUB1E221MNL1GS
35 (1V)	33	8×6.2	0.18	34.65	44	UUB1V330MCL1GS
	47	8×10	0.18	49.35	52	UUB1V470MNL1GS
	100	10×10	0.18	105	80	UUB1V101MNL1GS
50 (1H)	10	8×6.2	0.18	15	24	UUB1H100MCL1GS
	22	8×6.2	0.18	33	38	UUB1H220MCL1GS
	33	8×10	0.18	49.5	46	UUB1H330MNL1GS
	47	10×10	0.18	70.5	58	UUB1H470MNL1GS
160 (2C)	6.8	8×10	0.30	143.52	42	UUB2C6R8MNL1GS
	10	10×10	0.30	164	59	UUB2C100MNL1GS
200 (2D)	4.7	8×10	0.30	137.6	36	UUB2D4R7MNL1GS
	6.8	10×10	0.30	154.4	59	UUB2D6R8MNL1GS
	10	10×10	0.30	180	59	UUB2D100MNL1GS
250 (2E)	3.3	8×10	0.30	133	28	UUB2E3R3MNL1GS
	4.7	10×10	0.30	147	59	UUB2E4R7MNL1GS
400 (2G)	1	8×10	0.30	116	26	UUB2G010MNL1GS
	1.8	8×10	0.30	128.8	27	UUB2G1R8MNL1GS
	2.2	10×10	0.30	135.2	36	UUB2G2R2MNL1GS
	3.3	10×10	0.30	152.8	38	UUB2G3R3MNL1GS

• For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.