


## Product Features

- Near-zero propagation delay
- 5-ohm switches connect inputs to outputs
- Direct bus connection when switches are ON
- Fast Switching Speed: 5.5ns max.
- Operating V<sub>CC</sub> Range: 3.0V to 3.6V
- Industrial operating temperature: -40°C to +85°C
- Packages available:
  - 56-pin 240-mil wide thin plastic TSSOP (A)
  - 56-pin 300-mil wide plastic SSOP (V)

## Logic Block Diagram

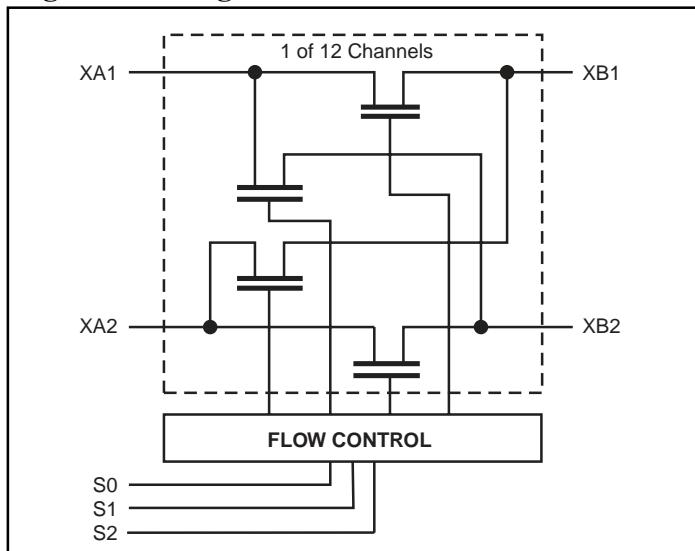

## Truth Table

Function	S2	S1	S0	A1	A2
Disconnect	L	L	L	Z	Z
A1 to B1	L	L	H	B1	Z
A1 to B2	L	H	L	B2	Z
A2 to B1	L	H	H	Z	B1
A2 to B2	H	L	L	Z	B2
A1 to A2 and B2	H	L	H	A2/B2	A1/B2
A1 to B1, A2 to B2	H	H	L	B1	B2
A1 to B2, A2 to B1	H	H	H	B2	B1

### Note:

1. H = High Voltage Level
- L = Low Voltage Level
- Z = High Impedance

## Product Description

Pericom Semiconductor's PI3B series of logic circuits are produced using the Company's advanced submicron CMOS technology.

The PI3B16213 is a 3.3 volt, 24-bit bus-exchange switch designed with a low ON resistance allowing connections to be made with minimal propagation delay. This device operates either as a 24-bit or as a 12-bit bus switch, providing data exchange between the four signal ports via the data-select (S0-S2) terminals.

## Product Pin Configuration

56-Pin A, V	
S0	1
1A1	2
1A2	3
2A1	4
2A2	5
3A1	6
3A2	7
GND	8
4A1	9
4A2	10
5A1	11
5A2	12
6A1	13
6A2	14
7A1	15
7A2	16
VCC	17
8A1	18
GND	19
8A2	20
9A1	21
9A2	22
10A1	23
10A2	24
11A1	25
11A2	26
12A1	27
12A2	28
S1	56
S2	55
1B1	54
1B2	53
2B1	52
2B2	51
3B1	50
GND	49
3B2	48
4B1	47
4B2	46
5B1	45
5B2	44
6B1	43
6B2	42
7B1	41
7B2	40
8B1	39
GND	38
8B2	37
9B1	36
9B2	35
10B1	34
10B2	33
11B1	32
11B2	31
12B1	30
12B2	29

## Product Pin Description

Pin Name	I/O	Description
S0-S2	I	Select Inputs
xAx	I/O	Bus A
xBx	I/O	Bus B

## Maximum Ratings

(Above which useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied .....	-40°C to +85°C
Supply Voltage Range .....	-0.5V to +4.60V
DC Input Voltage .....	-0.5V to +4.60V
DC Output Current .....	120mA
Power Dissipation .....	1 W

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## Electrical Characteristics (Over the Operating Range, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ , $V_{CC} = 3.0\text{V}$ to $3.6\text{V}$ )

Parameters	Description		Test Conditions			Min.	Typ <sup>(1)</sup>	Max.	Units
$V_{IK}$	Input HIGH Voltage		$V_{CC} = \text{Min.}$					-1.2	V
$I_I$	Input Current		$V_{CC} = 0$			$V_I = \text{Max.}$			10
			$V_{CC} = \text{Max.}$			$V_I = \text{Max. or GND}$			$\pm 1$
$I_{CC}$	Quiescent Power Supply Current		$V_{CC} = \text{Max.}$ IO = 0	$V_I = V_{CC}$ or GND				10	
$C_{IN}^{(2)}$	Input Capacitance		$V_{IN} = 0\text{V}$					3	pF
$C_{OFF}^{(2)}$	Switch Off, A/B Capacitance		$V_{IN} = 0\text{V}$ ; S0, S1, S2 = GND					14	
$R_{ON}^{(3)}$	A to B	$V_{CC} = \text{Min.}$	$V_{CC} = \text{Min}$	$V_I = 0$	$I_I = 30\text{mA}$ ,		5	8	$\Omega$
					$I_I = 64\text{mA}$		5	8	
				$V_I = 2.4\text{ V}$	$I_I = 15\text{mA}$		10	15	
	A1 to A2	$V_{CC} = \text{Min.}$	$V_{CC} = \text{Min}$	$V_I = 0$	$I_I = 30\text{mA}$ ,		10	14	
					$I_I = 64\text{mA}$		10	14	
				$V_I = 2.4\text{ V}$	$I_I = 15\text{mA}$		20	30	

### Notes:

1. Typical values are at  $V_{CC} = 3.3\text{V}$ ,  $T_A = 25^\circ\text{C}$  ambient and maximum loading.
2. This parameter is determined by device characterization but is not production tested.
3. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.

### Recommended Operating Conditions

Parameters	Description	Min.	Typ <sup>(1)</sup>	Max.	Units
V <sub>CC</sub>	Supply voltage	3.0	—	3.6	V
V <sub>IH</sub>	High-level input voltage	2	—	—	
V <sub>IL</sub>	Low-level input voltage	—	—	0.8	
T <sub>A</sub>	Operating free-air temperature	-40	—	85	°C

**Notes:**

1. Typical values are at V<sub>CC</sub>=3.3V, +25°C ambient.


### PI3B16213 Switching Characteristics over Operating Range

Parameters	From (Input)	To (Output)	V <sub>CC</sub> = 3.0 V to 3.6V		Units
			Min.	Max.	
t <sub>PD</sub> <sup>(1,2)</sup>	A or B	B or A	—	0.25	ns
	A1	A2	—	0.5	
t <sub>EN</sub> <sup>(2)</sup>	S	A or B	1	4.5	
t <sub>DIS</sub> <sup>(2)</sup>	S	A or B	1	5.5	
t <sub>EN</sub> <sup>(2)</sup>	S0	A1 and A2	1	4.5	
t <sub>DIS</sub> <sup>(2)</sup>	S0	A1 and A2	1	5.5	


**Note:**

1. This parameter is guaranteed but not tested on Propagation Delays. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.
2. See test circuit and waveforms.

### 56-Pin TSSOP (A) Package

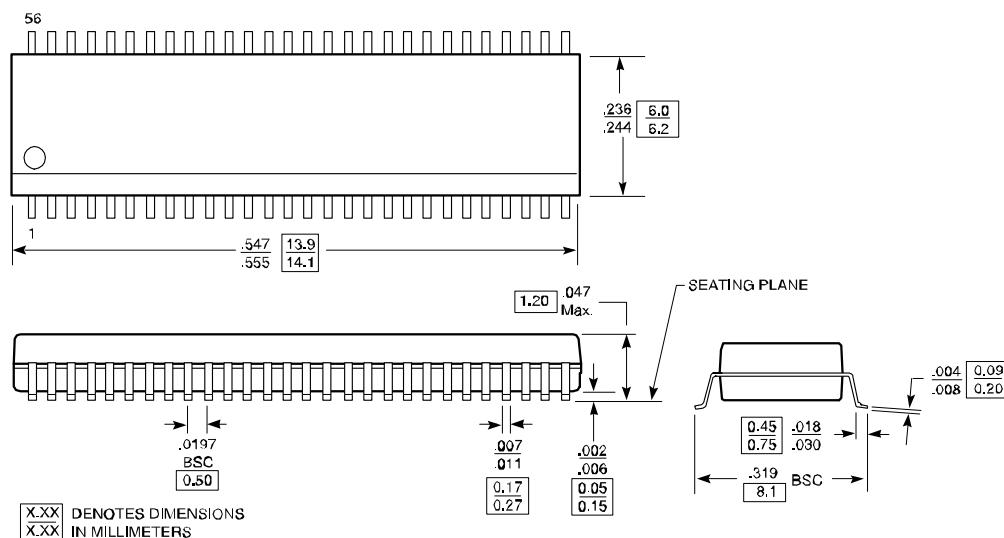

### 56-Pin SSOP (V) Package

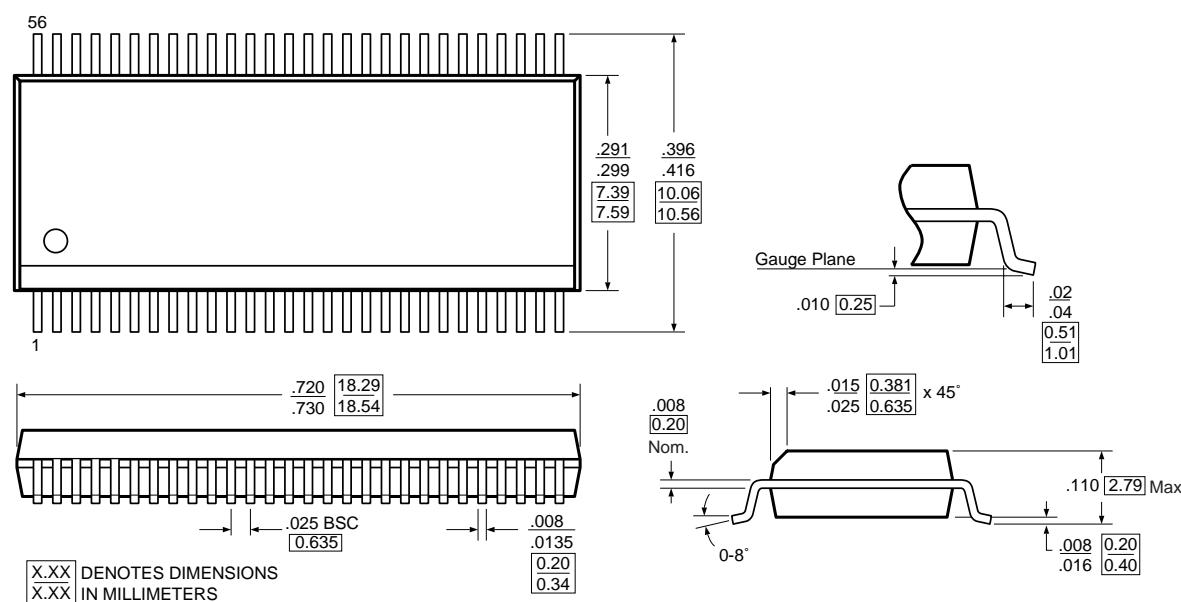

### Ordering Information

Part	Pin	Package	Width	Temperature
PI3B16213A	56	TSSOP	240-mil	-40°C to 85°C
PI3B16213V		SSOP	300-mil	