

# Surface Mount Bandpass Filter

## BPF-C550+

50Ω      100 to 1000 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HU1186

### The Big Deal

- Sharp roll-off
- Ultra wide bandwidth
- Good VSWR
- Miniature shielded package

### Product Overview

The BPF-C550+ is an ultra wide band filter in a small shielded package (size of 0.87" x 0.80" x 0.25") fabricated using SMT technology. This filter offers sharp roll-off and good rejection for use in receiver front end applications.

### Key Features

Feature	Advantages
Sharp roll-off	BPF-C550+ attenuates spurious signals and rejects harmonics for wide band of frequency.
Good VSWR over ultra wide bandwidth	This filter maintains typical 1.5 VSWR over ultra wide passband frequency range making this filter easier to integrate into receiver and transmitter RF chains with less concerns for in band frequency ripple.
Small size, 0.87" x 0.80" x 0.25"	The unique surface mount package enables the BPF-C550+ to be used in compact design.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-C550+

50Ω 100 to 1000 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HU1186

### Features

- Sharp roll-off
- Ultra wide bandwidth
- Good VSWR
- Miniature shielded package


### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	550	—	MHz	
	Insertion Loss	F1-F2	100-1000	—	1.1	2.2	dB
	VSWR	F1-F2	100-1000	—	1.5	2.1	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-80	35	46	—	dB
	VSWR	DC-F3	DC-80	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	1200-2000	30	39	—	dB
	VSWR	F4-F5	1200-2000	—	20	—	:1

### Applications

- Test and measurement
- Receiver front end applications
- Cellular network
- Civil aircraft communication radio

### Functional Schematic

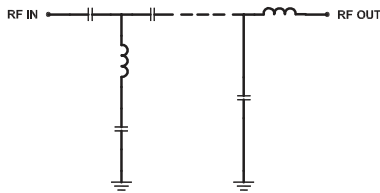

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1W

Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C





Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	104.03	203.05	100	25.74
50.0	68.47	120.93	150	4.59
80.0	54.18	21.35	200	3.29
83.5	30.52	12.73	250	2.22
85.5	20.18	8.56	300	1.74
88.0	10.30	4.68	350	1.48
92.0	3.15	2.19	400	1.33
100.0	1.11	1.14	450	1.24
550.0	0.42	1.29	500	1.19
1000.0	0.85	1.17	550	1.18
1090.0	3.01	1.61	600	1.18
1112.0	9.84	5.59	650	1.21
1120.0	13.67	7.94	700	1.26
1133.0	20.55	11.45	750	1.32
1149.0	30.36	14.60	800	1.40
1200.0	46.91	20.01	850	1.52
1350.0	44.37	25.02	900	1.74
1500.0	65.83	25.38	950	1.96
1800.0	43.14	25.65	975	2.35
2000.0	42.26	25.13	1000	2.71

### Typical Frequency Response



### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

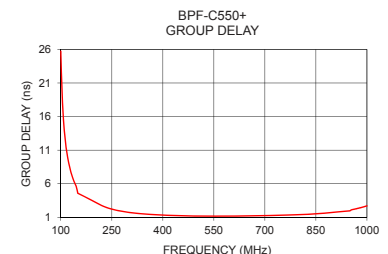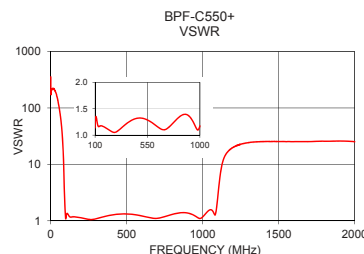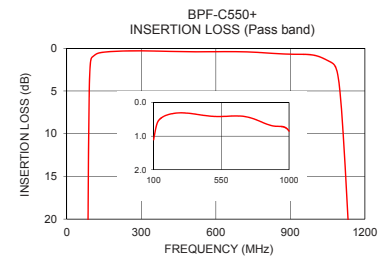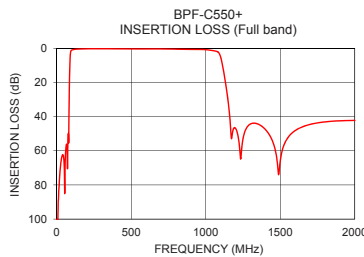

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
M174392  
BPF-C550+  
EDU2116\_1  
URJ  
190823  
Page 2 of 3

## Pad Connections

INPUT	2
OUTPUT	9
GROUND	1,3,4,5,7,8,10,11,12,14
NOT CONNECTED	6,13

**Demo Board MCL P/N: TB-500+**  
**Suggested PCB Layout (PL-294)**

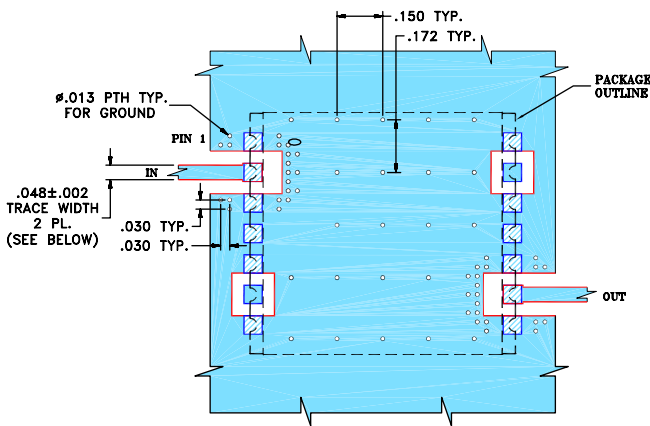


**NOTES:**

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B, DIELECTRIC THICKNESS: .030" ± .002"; COPPER: 1/2 OZ ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

## Outline Drawing

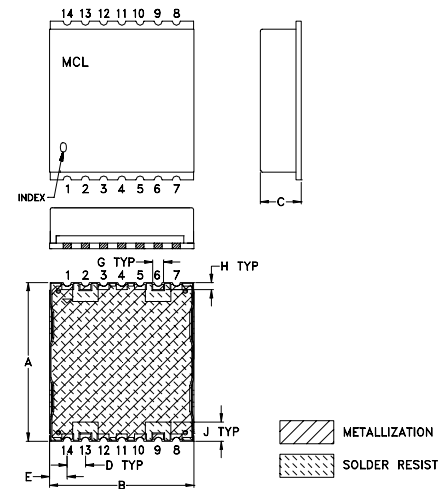


## Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
.870	.800	.25	.100	.097	--	.060	.040
22.10	20.32	6.35	2.54	2.46	--	1.52	1.02
J	K	L	M	N	P	wt	
.105	.910	--	.060	.060	--	grams	
2.67	23.11	--	1.52	1.52	--	2.85	

*Note: Please refer to case style drawing for details*

## PCB Land Pattern



Suggested Layout,  
 Tolerance to be within ±.002

**Notes**

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)