


# OLED DISPLAY SOLUTIONS

# Pictiva™ 0.9-inch 80x48 OLED display

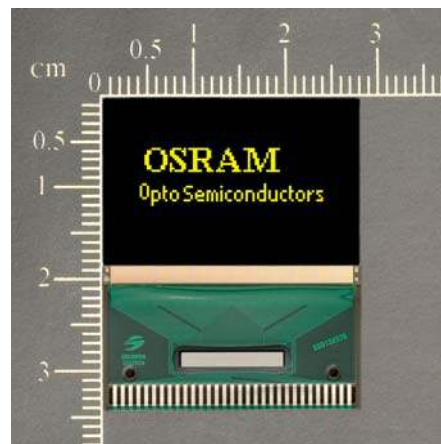

### Features

- Long-lifetime OLED
- 180° viewing angle
- Fast response, video capable
- High contrast
- Wide operating temperature range

### Benefits

- Ease of readability
- No backlight required
- Low power consumption


### Applications

- Audio/Video
- Entertainment
- Industrial
- Medical
- Instruments

### Specifications

Display Format	80 Columns x 48 Rows				
Diagonal	0.9 inch				
Pixel Pitch	0.250 (W) x 0.250 (H) mm				
Color, Luminance & lifetime	Color	CIE x	CIE y	Cd/m <sup>2</sup>	Lifetime hrs, 25° C
	Elegance Yellow	0.46	0.54	100	40K
	Lime Green	0.37	0.62	120	10K
	Golden Orange	0.60	0.40	60	10K
Grayscale	4 bit				
Active Area	19.97 (W) X 11.83 (H) mm				
Module Size	27.80 (W) X 34.85 (H) X 2.20 mm (T)				
Viewing Angle	180°				
Contrast Ratio	2000:1 dark ambient				
Temperature	-30°C to 70°C				
Logic Voltage	2.4V – 3.5V				
Supply Voltage	12.5V				
Power Cons.	0.05 mW (sleep mode)				
Interface	Parallel/ Serial				
Driver	SSD1325				
Weight	2.54g typical				

# Mechanical Dimensions and Pin Description

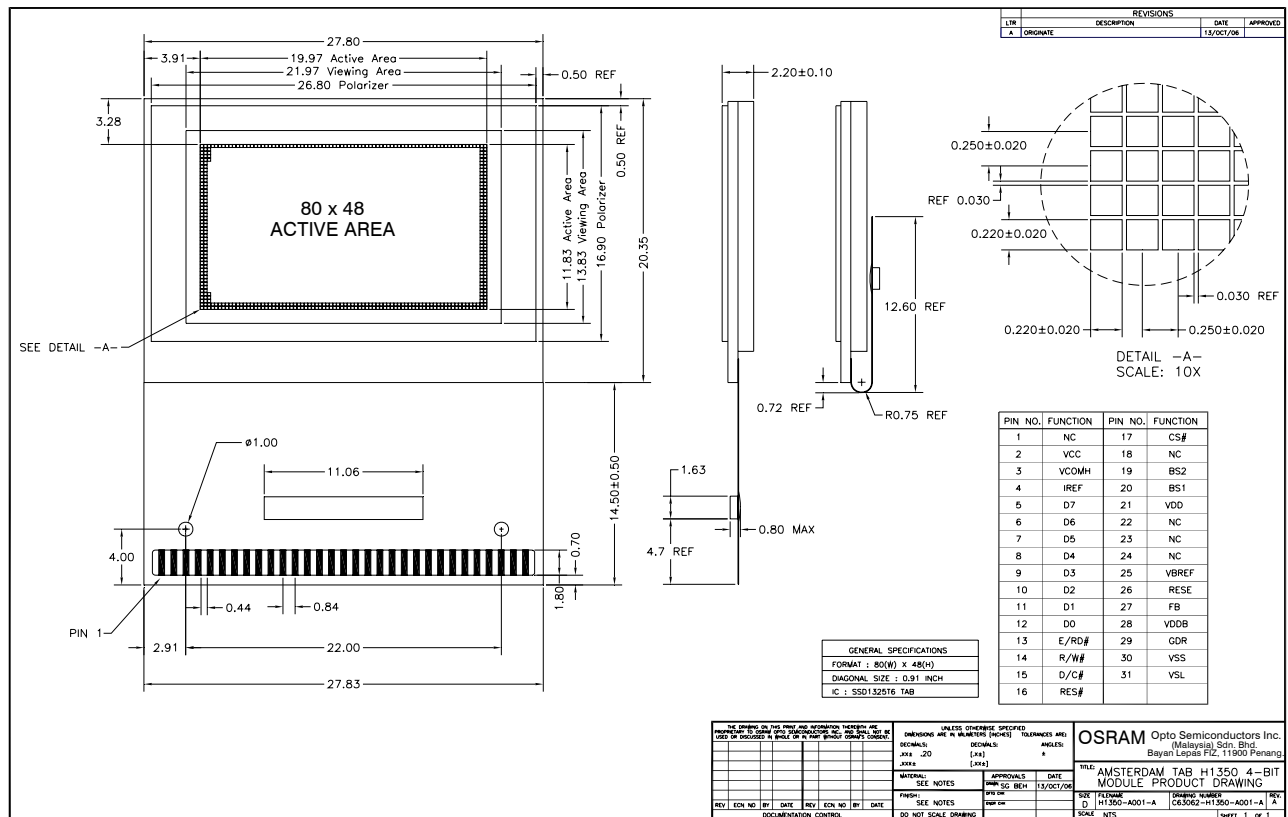

## Ordering Information

Part Number	Order Number	Description
OS080048PK09MY0B10	Q65110A5710	Pictiva™ 0.9 inch 80x48 OLED Display, Elegance Yellow
OS080048PK09MG1B10	Q65110A5706	Pictiva™ 0.9 inch 80x48 OLED Display, Lime Green
OS080048PK09MO2B10	Q65110A5704	Pictiva™ 0.9 inch 80x48 OLED Display, Golden Orange

Note:

All the above products are compliant with RoHS standards:

Lead (Pb) Free Product - EU RoHS Compliant  
- China RoHS Compliant



此产品不含铅，符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。

**Contact Information**  
OSRAM Opto Semiconductors  
Asia : +60(0) 4 631-8100  
Europe : +49(0) 941-850-3535  
North America : +1-888-446-7726 ext.4310  
Web : [www.pictiva.com](http://www.pictiva.com)

[prasia@osram-os.com](mailto:prasia@osram-os.com)  
[pr@osram-os.com](mailto:pr@osram-os.com)  
[info@osram-os.com](mailto:info@osram-os.com)