



This is issued in strict confidence on condition that it is not used as a basis for manufacture or sale, and that it is not copied, reprinted or disclosed to a third party either wholly or in part without prior written consent of ITT Cannon.

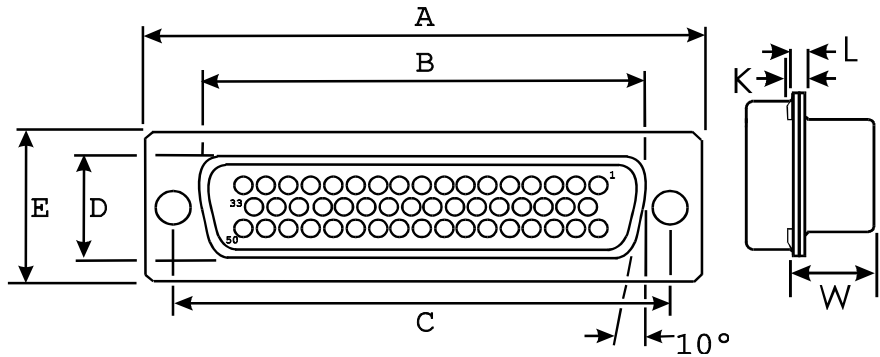

Selected hardware option
with 2,26 (.089) mounting hole

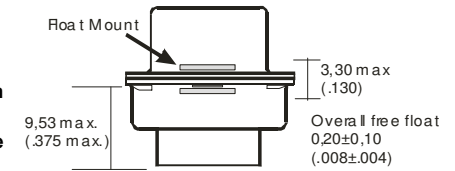

A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,51 (.020)
66,93 (2.635)	52,42 (2.064)	61,11 (2.406)	10,74 (.423)	15,37 (.605)	0,76 (.030)	6,94 (.273)	1,27 (.050)

50 crimp signal contacts, part number 031-1007-042 kitted with each connector
Kitted with tool CIET-20HD

DESCRIPTION	MATERIAL	FINISH
Insulator	Polyester	None, (Color White), Copper alloy retention clips
Shells	Steel	Yellow Chromate over Zinc
Signal Contacts	Copper alloy	50 u inch Gold over Cu with Stainless Steel Sleeve
Rivets	Stainless Steel	Passivated
Washers	Stainless Steel	Passivated

Unless otherwise specified,
dimensions are in mm & (in.)
Tolerances are (.XXX = mm)
Decimals Angles
X ± 0,20 (.008) X° ± 1.0°
.XX ± 0,10 (.004)
.XXX ± 0,05 (.002)

Issue Date: 18-May-18 Cannon ITT Industries

CONNECTOR, RECEPTACLE, ELECTRICAL
D-SUBMINIATURE 50 POSITION CRIMP

PART NO. **DDMAMYT50S**