



Electrical Specifications

Center Frequency: 1150 MHz
Bandwidth: Fo ± 220 MHz
Pole: 6
Insertion Loss: 4.0 dB Max
Ripple in BW: 0.5 dB Min
VSWR: 1.7:1 Max
Attenuation: >15 dB @ 870 MHz
 >50 dB @ 1800 MHz
Impedance: 50Ω
Power Input: 10 dBm Max

Mechanical


Mounting Method: SMT
Dimensions: 38 x 17 x 7.5 mm

Environmental

Operating Temperature: -30 to +80° C
Storage Temperature: -40 to +85° C

This product is RoHs Compliant

Outline Drawing:

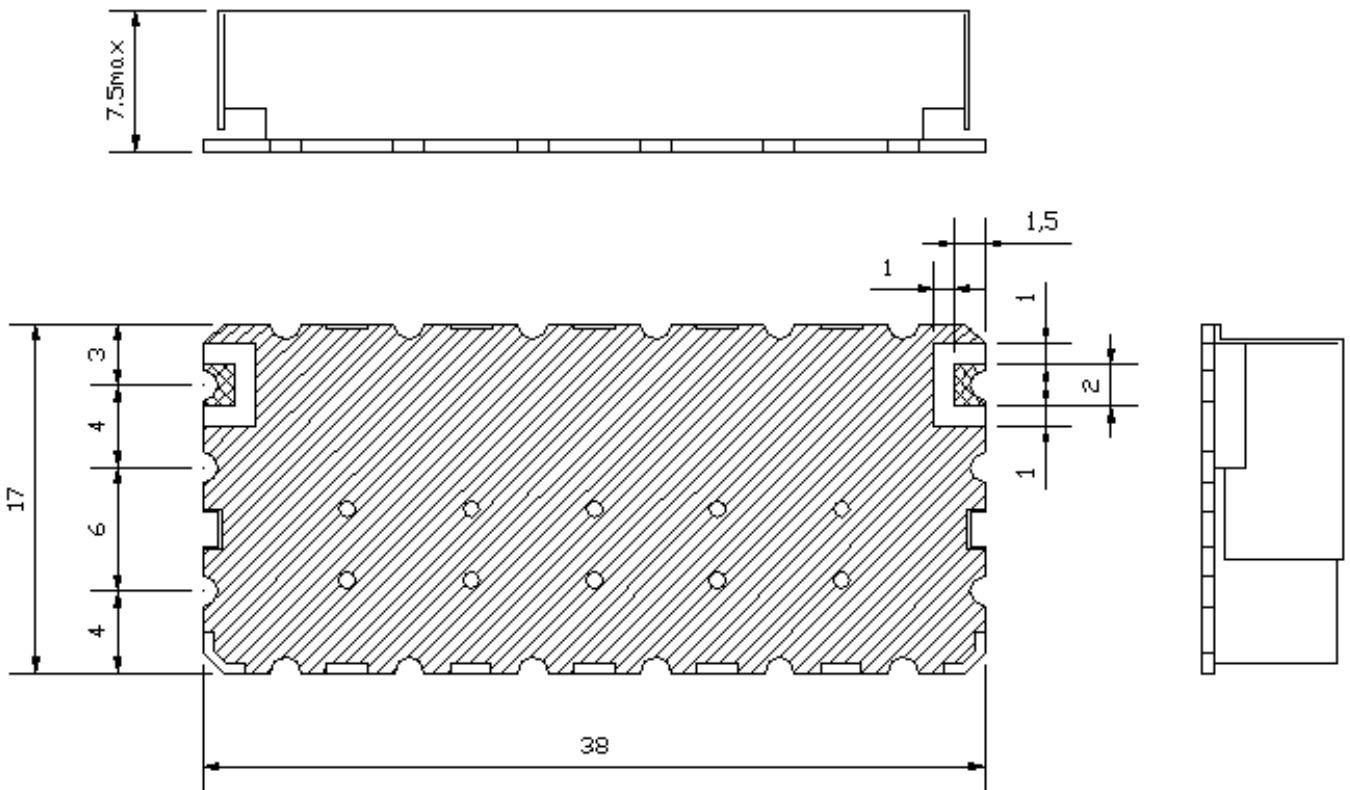

Unit:mm
Tolerance:±0.3