

т	۵	н <b>п</b>	m	<b>O</b>



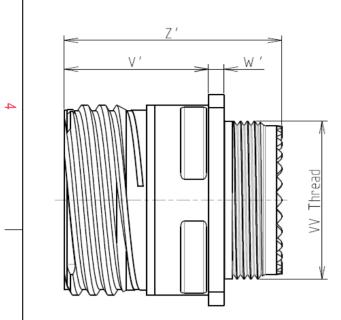



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	u contacts and Accessories
-Temperature Range	-65℃ to +175℃
-Salt Spray	: 2000 hours

: 11.6 g ± 10%

8D 0

G

11

J

22

В

F

Ν


Connector	dimension
Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT LAYOUT : 11-22

CONTACT TYPE : SOCKET(500 Matings)

Е



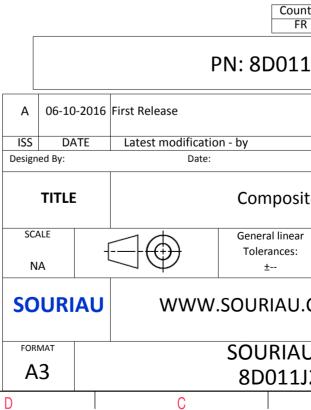

	Ξ		А			
					3	
S EX4	AMPLE					
s whic er of t	ny non-conformity or damage vhich does not comply with of the Parties or by a third party ation, technical notice.)					
untry FR	Jurisd	liction & Cont Not Listed	rol List		2	
.1J2	22BN					
		CUSTOMF	R DRAWING	MOD N°		
site	e Receptacle 8D series					
ar			PROJECT			
			<b>59</b> sument is the prop	perty of	1	
J.CC		it mus	SOURIAU t not be reproduc icated without pe	ed or		
				SHEET 1/2		
_J Z 4	2BN-C B		A	1/2	J	

22* Image: Super Large of the Production State of the P	,								
$\begin{array}{c} \bullet & \bullet \\ \circ & \circ \\ \circ & \circ \\ \bullet & \circ \\ \bullet & \circ \\ \bullet & \bullet \\$									Panel Cuto
4#22D   Image: Constraint of the product of the	4	(	°0 0°				SO		E 0)
A   1.905   1.905     C   -1.905   -1.905   -1.905     D   -1.905   1.905   -1.905     D   -1.905   1.905   -1.905     SOURAU shall not be liable die to a use of the Product the Specification sized by the Specification sized by the Specification sized by the Specification sized by the Specification - Bry Date:   Image: Source of the Product the Specification - Bry Date:     No   Source of the Product the Specification - Bry Date:   Date:   Dimper dig:   Date:     SOURIAU   WWW.SOURIAU   MWWW.SOURIAU   SOURIAU   WWW.SOURIAU   MWWW.SOURIAU     Na   Image: Source of the Product the Specification - Bry Date:   Dimper dig:   Date:   Dimper dig:   Date:		Ctc	11-22				<u></u>		<u></u>
SURIAU shall not be liable due to a use of the Prod the Specifications issued by e (professional recom PN: 8DU A 06-10-2016 First Release <u>155 DATE Latest modification - by</u> Designed By: Date: TITLE Comp Solut: NA Designed By: Date: TITLE Comp Solut: NA General SOURIAU WWW.SOURI/ A3 SOUR	w	B C	1.905 -1.905 -1.905 -1.905						Dim ØA ØAA R1
NO PN: 8D( A 06-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Comp SCALE General NA E- SOURIAU WWW.SOURI/ TOTEMAT SOUR A3 8D0		-						due to a use of the Specifications iss	be liable for a the Products w
A 06-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Comp SCALE General NA General SCALE General NA General Toleran Toleran SOURIAU WWW.SOURIA FORMAT SOUR A3 SOUR	2								Coun FR
SCALE NA SOURIAU FORMAT A3 SOUR A3 SOUR A3 SOUR A3						ISS	DATE	First Release	
FORMAT SOUR A3 8D0						SCA	LE .		Composit General linear Tolerances: ±
A3 8D0						SO	URIAU		OURIAU.
H I G I F I E D I C I				1		A			SOURIAU 8D011J
Ÿ		Н	G	F	E	D		С	

Т

ш

т

G

0

