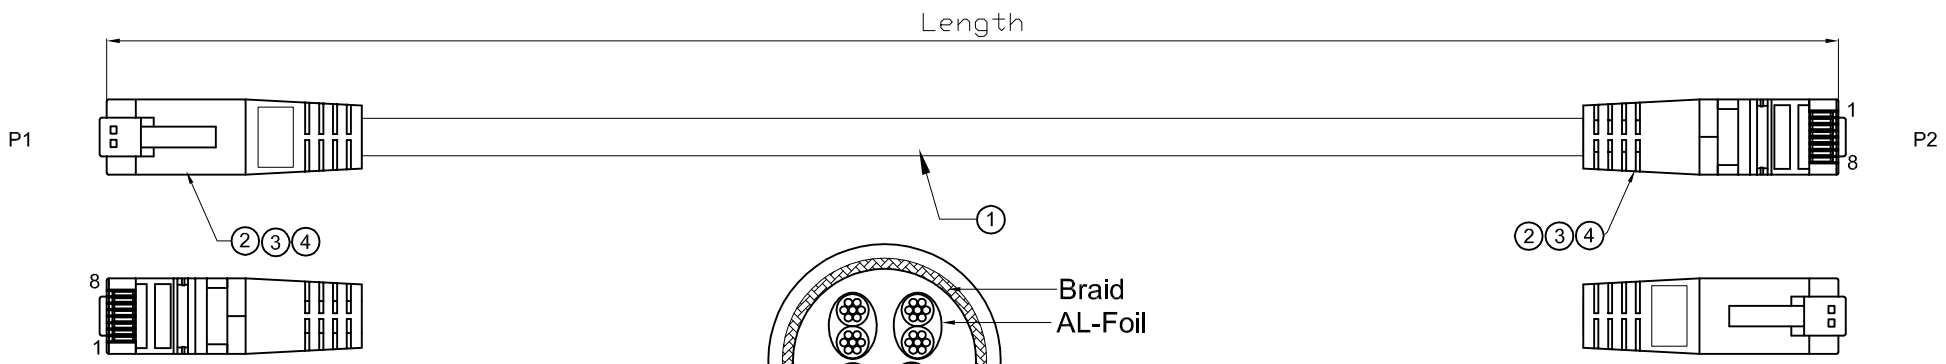

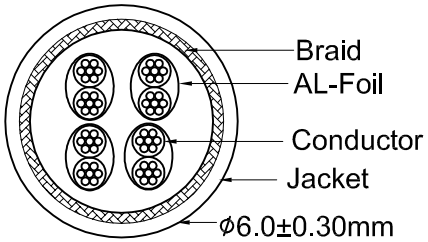

PIN OUT

P1	COLOR	P2
1	WHITE	1
2	ORANGE	2
3	WHITE	3
6	GREEN	6
4	BLUE	4
5	WHITE	5
7	WHITE	7
8	BROWN	8
SHELL	BRAID	SHELL

TEST CONDITION:
1.1OO% OPEN & SHORT TESTING
2.VOLTAGE:300V DC
3.INSULATION RESISTANCE:10M ohm
4.CONTACT RESISTANCE:3 ohm(1M~3M)
5 ohm(5M~10M)
8 ohm(15M)

NO:	NAME	DESCRIPTION	Q'TY	UNIT
④	AL-FOIL	Conductive AL-FOIL:W=8mm L=28mm	2	PCS
③	OVERMOLD	75A PVC Color: see order code	N/A	G
②	CONNECT	CAT 6 RJ45 8P8C PLUG Brass 3u" gold,Shell:Nickel plated	2	PCS
①	CABLE	LAN CAT6 SSTP (24AWG*1P+AL)*4+BRAID, OD:6.0±0.3mm JACKET COLOR:see order code	1	PCS

WSW order code
AMJS0909-xxxx-xxB-24

Cable length
0030: 0.3±0.015M
0050: 0.5±0.02M
0100: 1.0±0.03M
0150: 1.5±0.03M
0200: 2.0±0.05M
0300: 3.0±0.08M
0500: 5.0±0.15M
0700: 7.0±0.25M
1000: 10±0.30M
1500: 15±0.50M

Cable&Molding color
BK: Black
RD: Red
YE: Yellow
GN: Green
GY: Grey
BU: Blue
WH: White
BN: Brown

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
⓪	Drawn	30.03.2017	Amy

	Date	Name
Drawn	30.03.2017	Amy
Approved	30.03.2017	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AMJS0909-xxxx-xxB-24

Drawing-No.
ASS 7950 CA

rev00

Replace

Sheet