


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16		A	RELEASE PER NPR	06 DEC 05	CSV	JD
			A1	REVISED PER ECO-09-024927	09NOV09	KK	AEG

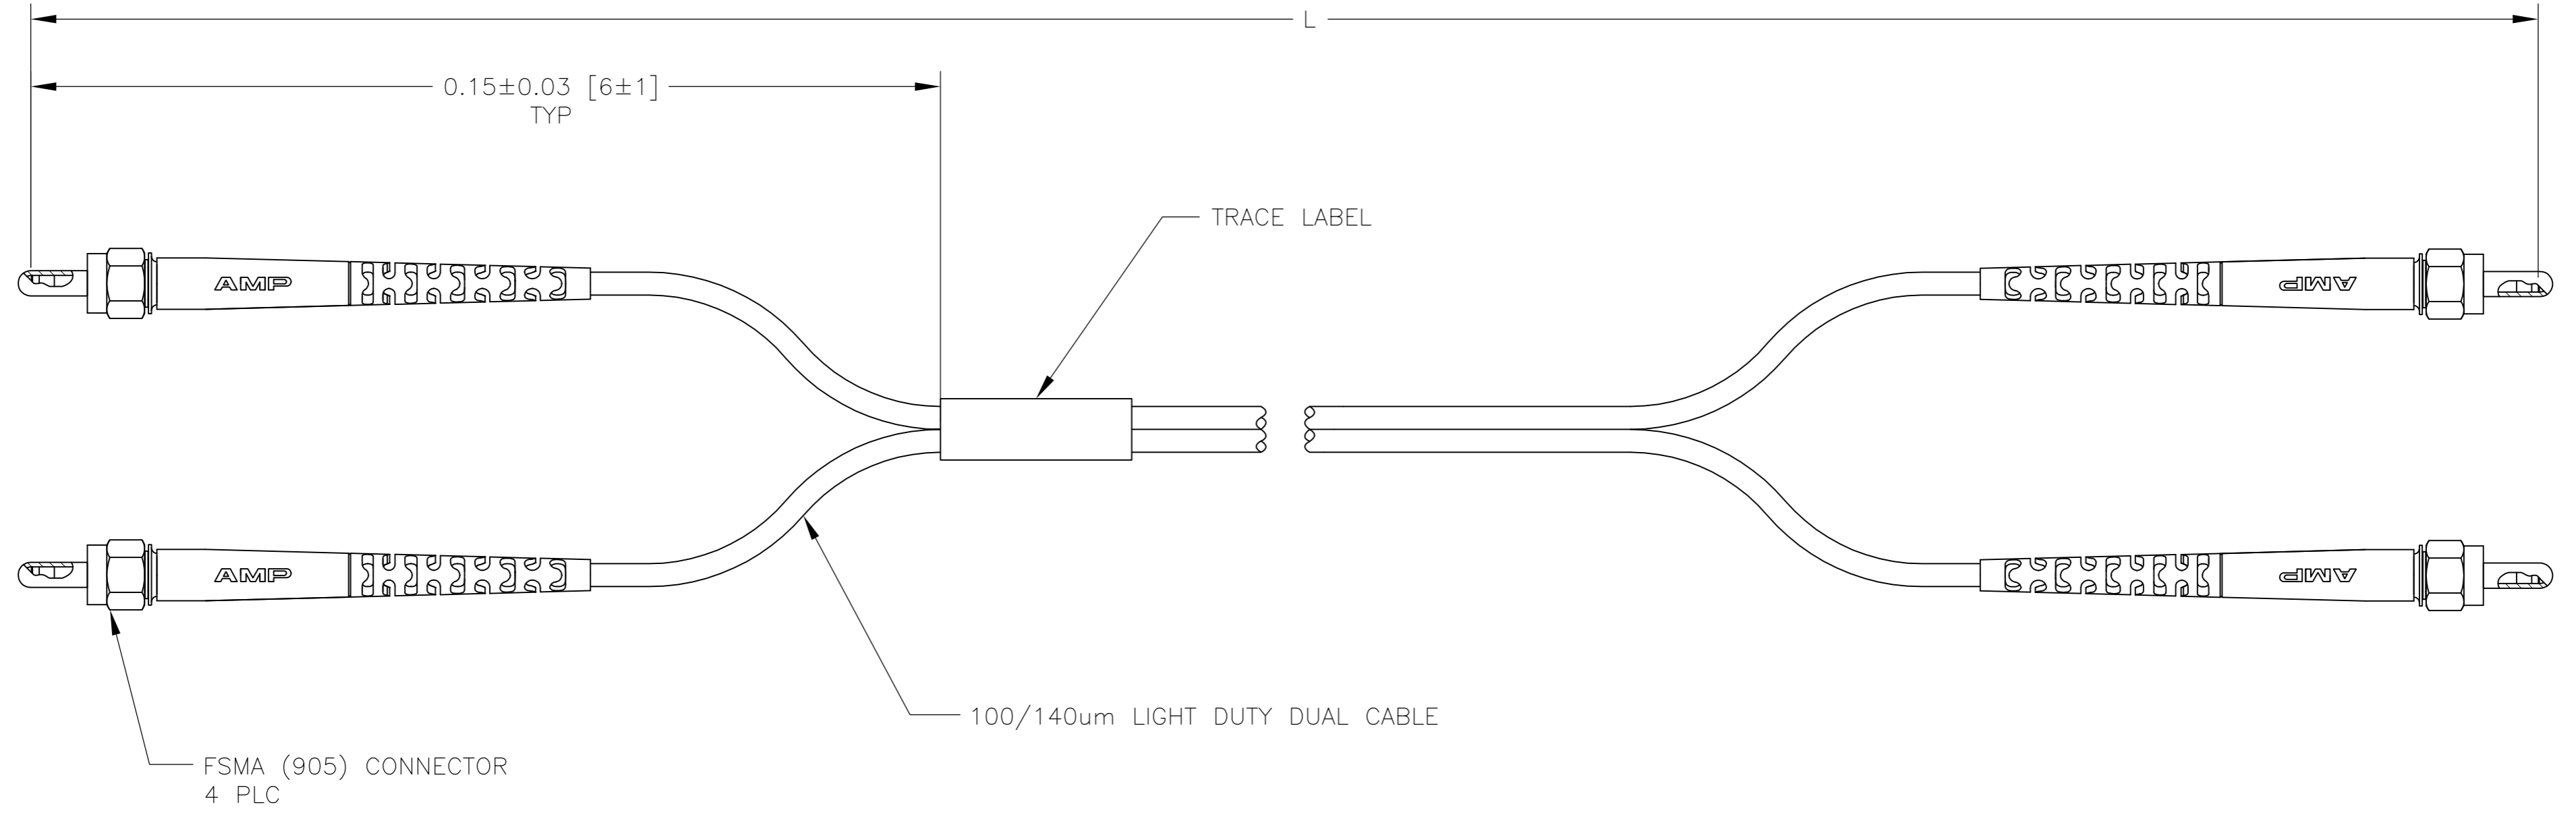

- 1 MAXIMUM INSERTION LOSS IS 2.0dB PLUS CABLE ATTENUATION OF 3.0dB/km AT 1300nm. (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

3	1	L METERS [INCHES]	PART NUMBER
2.53		175.00±1.75 [6890±69]	1-5502153-1
2.45		150.00±1.50 [5906±59]	1-5502153-0
2.41		137.16±1.00 [5400±54]	5502153-9
2.24		80.00±0.08 [3150±31]	5502153-8
2.09		30.48±0.30 [1200±12]	5502153-7
2.09		30.00±0.30 [1181±12]	5502153-6
2.03		10.00±0.15 [394±6]	5502153-5
2.01		6.00±0.08 [236±3]	5502153-4
2.01		5.00±0.08 [197±3]	5502153-3
2.00		3.00±0.05 [118±2]	5502153-2
2.00		1.00±0.05 [39±2]	5502153-1
3	1	MAX IL (dB)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.S.VASU	06 DEC 05	Tyco Electronics Corporation Harrisburg Pa, 17105-3608
CHK	J.DUNCAN	06 DEC 05	
APVD	J.DUNCAN	06 DEC 05	
PRODUCT SPEC			
APPLICATION SPEC			NAME
			CABLE ASSEMBLY, FIBER OPTIC, 100/140µm DUAL FSMA (905), OPTIMATE
MATERIAL			SIZE
			A2
			CAGE CODE
			00779
			DRAWING NO
			C=5502153
			RESTRICTED TO
			-
			SCALE
			NTS
			SHEET
			1 OF 1
			REV
			A1

CUSTOMER DRAWING