


### Clamping Carrier X 95

The Clamping Carrier X 95 allows the construction of T-shaped structures with X 95 profiles. In contrast to the Carriers X 95 (see page 08), these clamping versions are not equipped with a Teflon film on the bottom side to provide a non-slippery connection to the profiles.

- Building T-structures with X 95 profiles
- Equipped with two anvil clamps
- Ø 11 mm center bore for mounting Levelling Feet
- 63 mm hole grid with Ø 6.6 mm holes

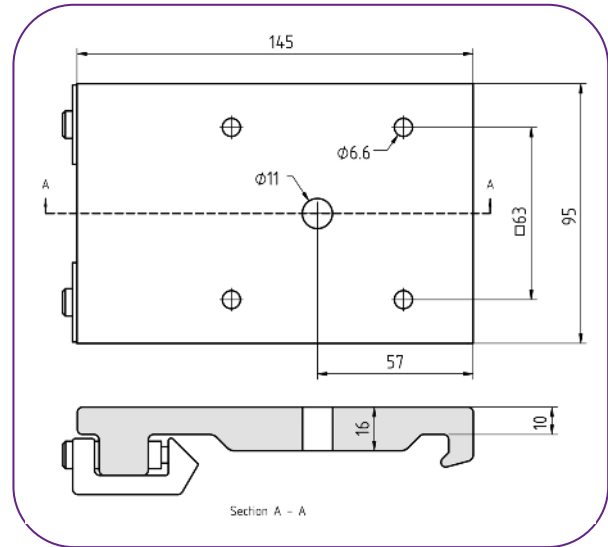

#### A Closer Look

CAD files of all mechanical components can be found at [www.qioptiq-shop.com](http://www.qioptiq-shop.com) under "Docs and Drawings" on the respective product sheets.

Item Title	Width (B) / mm	Width (B) / inch	Anodized	Part No.
Clamping Carrier colorless	95	3.74	Colorless	G026408000
Clamping Carrier black	95	3.74	Black	G026508000

Application example: With the help of clamping carriers it is possible to mount two X 95 profiles vertical to each other wherein the second profile can be moved along the first to the desired position. Finally, it can be fixed there. In the shown example the lower horizontal profile is held by two clamping carriers between two vertical profiles. The upper horizontal profile is held by two corner connectors. To compensate the additional distance, which is generated by the thickness of the clamping carriers, two additional end plates are inserted.

