


REV. 2
DCO 62982

| | |
|--|--------------------------------|
| COIL: @ 25°C | |
| SET | RESET |
| 1150 OHMS ±10% | 1150 OHMS ±10% |
| 26.5 VDC NOMINAL VOLTAGE | 26.5 VDC NOMINAL VOLTAGE |
| 13.5 VDC MUST OPERATE | 13.5 VDC MUST OPERATE |
| ENVIRONMENT: | |
| VIBRATION | 10 Hz 2000 Hz 30 g's |
| SHOCK | 100 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |
| NOTES: OPERATE & RELEASE 5 MS MAX. CONTACT BOUNCE 2 MS MAX. | |

CUSTOMER DATA SHEET

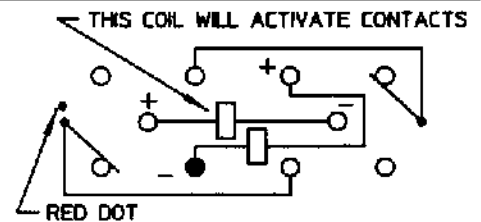

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/9/98

CK. 9/30/98



CUST. C. I. I. STD.
CUST. NO.

TYPE "LF" RELAY

LF2149K00