
Ŧ	្រា	н т	m	0





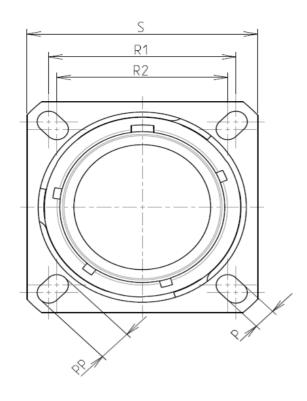

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	- 65°C to +175°C			

: 2000 hours

: 10.4 g ± 10%

8D 0

G

11

Х

01

Ρ

F


В


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01



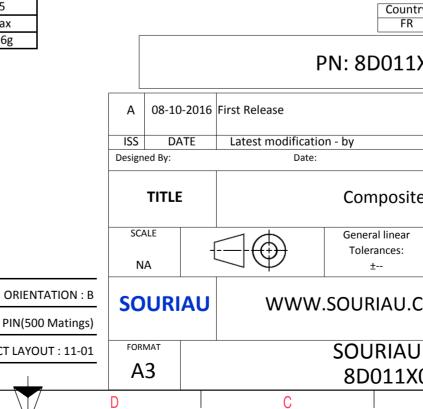

σ		A			
				4	
AS EXAMPLE				3	
any non-confo s which does no er of the Parties adation, technic untry Ju FR J	t comply wi or by a thir al notice.)	th d party control List		2	
			MOD N°		
ite Recept	customer drawing e Receptacle 8D series				
ar	NPRDS / PROJECT				
859 1 This document is the property of 1					
.COM SOURIAU it must not be reproduced or communicated without permission					
			SHEET		
X01PB-C		A	1/2		
_					

		G	г П	m		0
		Contact Layout				Panel Cutout
4		01			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		₩ 27 —	
ယ	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
N						(professional recommendati Country FR PN: 8D011X
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	Composite General linear Tolerances: ±
						SOURIAU
	Н	G	F	E	D A3	8D011X0

