


## 6-Cavity Duplexer for the 23 cm Amateur Radio Band

## DESCRIPTION

- The DPF 23/6 is a 6-cavity duplex filter for the 23 cm amateur band.
- > The DPF 23/6 can be tuned within the 1240 1300 MHz amateur band with a nominal duplex separation of 35 MHz.
- $\searrow$  The filter uses full-length 1/4  $\lambda$  cavities in a compact, extruded aluminium housing. The chassis is made of passivated steel, and teflon insulation has been applied in the rigid coaxial cables and in the connectors.
- > The filter is black vinyl coated to prevent corrosion.

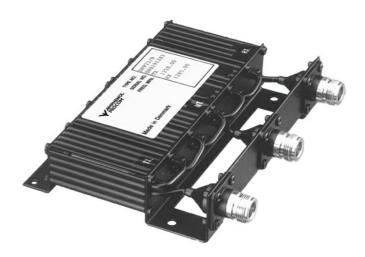

## ORDERING

TYPICAL RESPONSE CURVE

Model	Product No.
DPF 23/6	20000049

## SPECIFICATIONS

Operating temperature range

Frequency Stability

Electrical						
Model	DPF 23/6					
Frequency	1240 - 1300 MHz					
Max. Input Power	50 W					
Insertion Loss Tx-Ant and Ant-Rx	≤ 1.0 dB (typ. ≤ 0.7 dB)					
Tx Noise Suppression on Rx Frequency	≥ 85 dB					
Isolation Rx on Frequency Tx	≥ 85 dB					
Impedance	50 Ω					
Duplex Spacing	35 MHz (28 MHz on request)					
VSWR	< 1.5:1					
Mechanical						
Connection(s)	N(f)					
Dimensions	135 x 154 x 33 mm / 5.31 x 6.06 x 1.30 in.					
Weight	Approx. 0.62 kg / 1.37 lb.					
Environmental						

-30 °C to +60 °C

Approx. 5 ppm / °C

INSERTION LOSS LOW PORT [dB]				DUPLEXER TYPE: DPF 23/6 PORT ATTENUATION (dB)			INSERTION LOSS HIGH PORT [dB]					
0				_	0	LOW		HIC	H	0		_
0.5					10		1			0.5		
1.0	1	1			20					1.0	1	+
1.5	÷.	1			30				1	1.5	1	
2.0	Ŷ.		1		40				1	2.0		
2.5	÷.		1		50			1	1	2.5		
3.0	ŝ.		1		60					3.0		
3.5	ŝ.		1		70	$\backslash /$		1		3.5		
4.0	1			1	80					4.0		
4.5	1				90	V				4.5		
5.0	1			1	100					5.0		



